


# Illumio Core 23.2 Administration Guide

Published: 2024

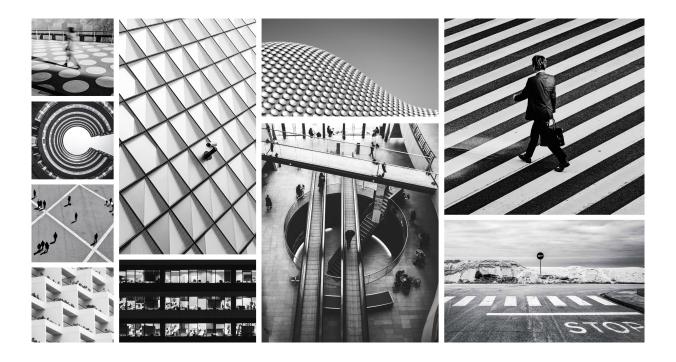

The guides in this category explain how to configure specific Illumio Core features after installing the PCE and VEN software in your environment. Additionally, use the information in this section to keep your Illumio Core deployment running effectively, and to troubleshoot issues that might occur.

# **Table of Contents**

Security Advisories	
September 2024 Security Advisories	
Ruby SAML gem component authentication bypass vulnerability	6
Severity	
Affected Products and Patch Information	6
Resolution	6
References	
Skipped Critical Patch Updates	
Discovered By	
Frequently Asked Questions	
Modification History	
September 2023 Security Advisories	
Authenticated RCE due to unsafe JSON deserialization	
Severity	
Affected Products and Patch Information	0
Resolution	
References	
Skipped Critical Patch Updates	
Discovered By	
Frequently Asked Questions	
PCE Administration	
Overview of PCE Administration	
Before You Begin	
Notational Conventions	
PCE Architecture and Components	11
PCE Control Interface and Commands	14
PCE Organization and Users	15
Access Configuration for PCE	16
Role-based Access Control	16
Role-based Access for Application Owners	24
Configure Access Restrictions and Trusted Proxy IPs	
Password Policy Configuration	
Authentication	
Azure AD Single Sign-on	
Active Directory Single Sign-on	
Okta Single Sign-on	
Manage PCE Nodes and Clusters	
Manage Data and Disk Capacity	
Cluster Nodes and Command-Line Operations	
Start and Stop Nodes and Cluster	
Check Node and Cluster Status	
Update PCE Configuration	
Firewall Coexistence	
PCE Listen Only Mode	
· · · · · · · · · · · · · · · · · · ·	
Expand 2x2 Cluster to 4x2	
Replace PCE Nodes or Uninstall Cluster	
PCE Database Management	
About the PCE Databases	
PCE Database Backup	
Database Migration, Failover, and Restore	
Manage Multi-Node Traffic Database	
PCE Default Object Limits	
Monitor and Diagnose PCE Health	. 133

	PCE Logs	133
	Monitor PCE Health	138
	PCE Health Metrics Reference	146
	Support Reports for PCE	
	PCE HA and DR	
	PCE HA and DR Concepts	
	PCE HA and DR Requirements	
	PCE Replication and Failover	
	PCE Failures and Recoveries	
	Connectivity Configuration for PCE	
	Connectivity Settings	
	SecureConnect Setup	
	AdminConnect Setup	
	PCE Troubleshooting	
	PCE Administration Troubleshooting Scenarios	197
VEN	Nadministration Guide 23.2	199
	Overview of VEN Administration	199
	About This Administration Guide	199
	VEN Architecture and Components	. 200
	About VEN Administration on Workloads	
	illumio-ven-ctl General Syntax	
	Useful VEN and OS Commands	
	VEN State	
	VEN Startup and Shutdown	
	Disable and Enable VENs (Windows only)	
	VEN Suspension	
	Deactivate VENs	
	WENT DE LET LITTE LITTE LET LET LET LET LET LET LET LET LET	
	VEN Deactivation and Unpairing	
	Deactivate and Unpair VENs	
	VEN Unpairing Details	
	Monitor and Diagnose VEN Status	
	VEN-to-PCE Communication	
	VEN Status Command and Options	
	VEN Logging	
	Tuning the IPFilter State Table (AIX/Solaris)	243
	Manage Conntrack Table Size (Linux)	244
	VEN Firewall Tampering Detection	246
	VEN Tampering Protection	249
	VEN Support Reports	253
	VEN Troubleshooting	
Ever	nts Administration and REST APIs	
	Overview of Events Administration	
	Before You Begin	
	About This Guide	
	Events Framework	
	Events Lifecycle for Resources	
	Events Described	
	Event Types, Syntax, and Record Format	
	List of Event Types	
	Common Criteria Only Events	
	View and Export Events	
	Examples of Events	
	Differences from Previous Releases	
	Events Monitoring Rest Practices	290

# Illumio Core 23.2 Administration Guide

Events Setup	293
Requirements for Events Framework	293
Events Settings	294
SIEM Integration for Events	297
Syslog Forwarding	298
Traffic Flow Summaries	301
Traffic Flow Types and Properties	302
Manage Traffic Flows Using REST API	304
Export Traffic Flow Summaries	309
Traffic Flow Summary Examples	310
Illumio Core PCE CLI Tool Guide 1.4.2	. 315
Overview of the CLI Tool	. 315
About This Guide	315
CLI Tool and PCE Resource Management	316
The ilo Command	. 317
HTTP Response Codes and Error Messages	318
Environment Variables	
Installation and Authentication	319
Installation Prerequisites	
Install, Upgrade, and Uninstall the CLI Tool	
Authenticate with the PCE	
CLI Tool Commands for Resources	
View Workload Rules	
View Report of Workload Services or Processes	
View Host and System Inventory	
Use the list Option for Resources	
List Draft or Active Version of Rulesets	
Import and Export Security Policy	
Upload Vulnerability Data	
CLI Tool Tutorials	
How to Import Traffic Flow Summaries	
How to Create Kerberos-Authenticated Workloads	
How to Work with Large Datasets	
How to Upload Vulnerability Data	
Legal Notice	348

# **Security Advisories**

This category includes announcements of security fixes and updates made in critical patch update advisories, security alerts and bulletins.

# **September 2024 Security Advisories**

Here's a list of the security advisories for 2024.

# Ruby SAML gem component authentication bypass vulnerability

The Ruby SAML gem is affected by an authentication bypass vulnerability, which impacts the Illumio PCE in both SaaS and on-premises deployments. An authenticated attacker could potentially leverage this vulnerability to authenticate as another SAML user. For SaaS customers, the target user can be in a different org and on a different cluster.

# Severity

Critical: CVSS score is 9.9

CVSS: AV:N/AC:L/PR:L/UI:N/S:C/C:H/I:H/A:H

### **Affected Products and Patch Information**

Security vulnerabilities addressed by this Security Alert affect the products listed below.

### **Table 1. Products Affected by the Security Vulnerability**

Affected Products	Affected Versions	Fixed Version
Illumio Core PCE	<= 21.5.36	>= 21.5.37
	<= 22.2.42	>= 22.2.43
	<= 22.5.32	>= 22.5.34
	<= 23.2.30	>= 23.2.31
	<= 23.5.21	>= 23.5.22
	<= 24.2.0	>= 24.2.10

#### Resolution

Upgrade to the latest release for a given major version.

#### References

- https://nvd.nist.gov/vuln/detail/CVE-2024-45409
- https://github.com/advisories/GHSA-jw9c-mfg7-9rx2

# **Skipped Critical Patch Updates**

Illumio strongly recommends that customers apply security patches as soon as possible. For customers that have skipped one or more Critical Patch Updates and are concerned about products that do not have security patches announced in this Critical Patch Update, please review previous Critical Patch Update advisories to determine appropriate actions.

# **Discovered By**

External Security Firm

# **Frequently Asked Questions**

- What software components are affected?
   Only the Illumio PCE is impacted by this vulnerability.
- What products did this affect?
   This vulnerability impacts the PCE, including Core on-premises deployments, Core SaaS, Endpoint, MSP, and Edge.
- Is Core SaaS affected?
   SaaS PCE clusters were impacted. Those environments have been patched.
- I'm using Cloud. Am I impacted?
   The Cloud platform is not affected.
- Will the patch affect performance?
  - The update is not expected to affect performance.
- How can I tell if this vulnerability was used against my on-premises PCE?
   Illumio is creating queries that can be used by customers to detect known vectors for exploitation of this vulnerability. Please contact Illumio Support or your account team for assistance. If you suspect this vulnerability was used within your environment, please reach out to Illumio Support.
- Has Illumio investigated if this vulnerability was used on any SaaS PCEs?
  Illumio is currently investigating all available data from the production SaaS environment and has so far found no indications that the issue has been exploited.
- I can't apply the patch immediately. How can I mitigate the issue in the meantime? This vulnerability requires SAML to be enabled on the customer's PCE in order to be exploited. Customers who cannot patch their PCEs immediately, and who wish to mitigate this issue, can choose to disable SAML authentication on the PCE. For details, see the "Authentication" topic in the PCE Administration Guide. Additionally, customers can enable IP restrictions to limit access to only trusted source IPs (for example, for privileged accounts). For details, see the "Configure Access Restrictions and Trusted Proxy IPs" topic in the PCE Administration Guide.
- How long will the upgrade take?
   The fix will be provided in a normal code release so this will take the same amount of time as any PCE upgrade.
- Were any Illumio customers impacted by this vulnerability?

Illumio is not aware of any exploitation of this vulnerability within any customer environments.

# **Modification History**

• September, 2024: Initial Publication of CVE

# **September 2023 Security Advisories**

Here's a list of the security advisories for 2023.

#### Authenticated RCE due to unsafe JSON deserialization

Unsafe descrialization of untrusted JSON allows execution of arbitrary code on affected releases of the Illumio PCE. Authentication to the API is required to exploit this vulnerability. The flaw exists within the network\_traffic API endpoint. An attacker can leverage this vulnerability to execute code in the context of the PCE's operating system user.

# **Severity**

Critical: CVSS score is 9.9

CVSS:3.1/AV:N/AC:L/PR:L/UI:N/S:C/C:H/I:H/A:H

# **Affected Products and Patch Information**

Security vulnerabilities addressed by this Security Alert affect the products listed below.

**Table 2. Products Affected by the Security Vulnerability** 

Affected Products	Affected Versions	Fixed Version
Illumio Core PCE	<= 19.3.6	>= 19.3.7
	<= 21.2.7	>= 21.2.8
	<= 21.5.35	>= 21.5.36
	<= 22.2.41	>= 22.2.42
	<= 22.5.30	>= 22.5.31
	<= 23.2.10	>= 23.2.11

#### Resolution

Upgrade to the latest release for a given major version.

#### References

https://www.cve.org/CVERecord?id=CVE-2023-5183

# **Skipped Critical Patch Updates**

Illumio strongly recommends that customers apply security patches as soon as possible. For customers that have skipped one or more Critical Patch Updates and are concerned about products that do not have security patches announced in this Critical Patch Update, please review previous Critical Patch Update advisories to determine appropriate actions.

# **Discovered By**

External Security Firm

# **Frequently Asked Questions**

- What software components are affected?
   Only the Illumio PCE is impacted by this vulnerability.
- What products did this affect?
  - This vulnerability impacts the PCE, including Core on-premises deployments, Core SaaS, Endpoint, MSP, and Edge.
- Is Core SaaS affected?
  - SaaS PCE clusters were impacted. Those environments have been patched.
- I'm using Cloud. Am I impacted?
  - The Cloud platform is not affected.
- How can I tell if this vulnerability was used against my on-premises PCE?
   Illumio is creating queries that can be used by customers to detect known vectors for exploitation of this vulnerability. Please contact Illumio Support or your account team for assistance. If you suspect this vulnerability was used within your environment, please reach out to Illumio Support.
- Has Illumio investigated if this vulnerability was used on any SaaS PCEs?
  Illumio is currently investigating all available data from the production SaaS environment and has so far found no indications that the issue has been exploited.
- I can't apply the patch immediately. How can I mitigate the issue in the meantime? This vulnerability requires SAML to be enabled on the customer's PCE in order to be exploited. Customers who cannot patch their PCEs immediately, and who wish to mitigate this issue, can choose to disable SAML authentication on the PCE.
- Reference
  - For details, see the topic Authentication in the PCE Administration Guide.
  - Additionally, customers can: Enable IP restrictions to limit access to only trusted source IPs (for example, for privileged accounts). For details, see the topic Configure Access Restrictions and Trusted Proxy IPs in the PCE Administration Guide.

- How long will the upgrade take?
   The fix will be provided in a normal code release so this will take the same amount of time as any PCE upgrade.
- Were any Illumio customers impacted by this vulnerability? Illumio is not aware of any exploitation of this vulnerability on any customer environments.

# **PCE Administration**

# **Overview of PCE Administration**

This section describes how to maintain and operate the Policy Compute Engine (PCE). It also includes other tasks required to manage your PCE deployment and help you with ongoing PCE operations and administration.

# **Before You Begin**

Before you begin, become familiar with the following technology:

- Your organization's security goals
- General computer system administration of Linux and Windows operating systems, including startup/shutdown, common processes or services
- Linux shell (bash) and Windows PowerShell
- TCP/IP networks, including protocols and well-known ports
- PKI certificates

#### **Notational Conventions**

This section gives information about the notational conventions used here.

#### **Review these Notational Conventions**

- Newly introduced terminology is italicized. Example: *activation code* (also known as pairing key)
- Command-line examples are monospace. Example: illumio-ven-ctl --activate
- Arguments on command lines are monospace italics. Example: illumio-ven-ctl --activate activation\_code
- In some examples, the output might be shown across several lines but is actually on one single line.
- Command input or output lines not essential to an example are sometimes omitted, as indicated by three periods in a row. Example:


```
... some command or command output ...
```


# **PCE Architecture and Components**

This section describes how the PCE functions, and provides an overview of its components and how they function together.

# **About the PCE Architecture**

The PCE has service tiers responsible for various functions.

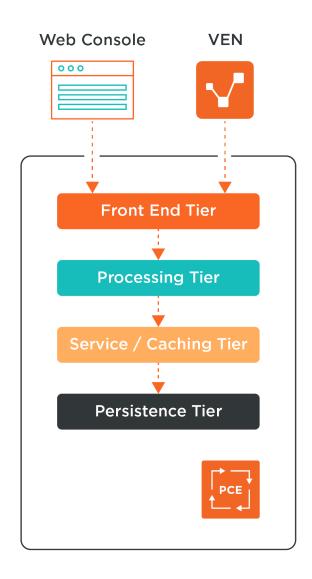

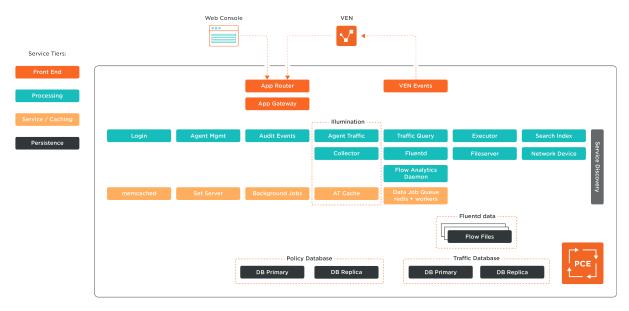

# **Description of PCE Components**

Tier	PCE compo- nent	Description
Front-end	Management	Management interfaces include:
	interfaces: PCE web console and VEN	<ul> <li>PCE web console</li> <li>REST API</li> <li>PCE command line</li> <li>VEN command line</li> </ul>
	VEN events	For information, see VEN Architecture and Components inVEN Administration Guide.
	App Router	Directs requests to the proper service.
Processing	Login	Central server for authentication.
	Agent Manager	Manages data in the policy domain, such as workload context and policy definitions. Also, manages data for all user and organization authentication and authorization, such as users, organizations, API keys, and roles.
	Agent Traffic	Provides information about traffic to and from VENs. Serves as the service underlying Illumination.
	Collector	Aggregates packet and traffic flow information sent from the VEN. Serves as the service underlying Illumination.
	Audit Events	Creates an overview of auditable system events across the PCE and VENs.
	Fluentd	Log forwarder service that forwards the flow log files received from VENs.
	Executor	Backbone for asynchronous job execution, such as report generation and background jobs.
	Fileserver	Central storage and retrieval for large data files.
	Search Index	Supports auto-completion in the PCE web console.
Service	memcached	Open source component: in-memory cache.
	Background Jobs	Backbone for asynchronous job execution, such as report generation and background jobs.
	Set Server	In-memory cache to aid in policy calculations.
	Agent Traffic cache	Stores the traffic flow data and graphs for Illumination. See Agent Traffic. In the PCE architecture diagram, labeled "AT Cache."
Persistence	Policy primary da- tabase and replica	Postgres database that contains all the policy and agent related data. The primary and replica databases run on separate data nodes.
	Traffic database pri- mary and replica	Postgres database that contains all the historical traffic flow data. Traffic Explorer is backed by this datastore. The primary and replica databases run on separate data nodes.

# **Management Interfaces for PCE and VEN**

The following diagram illustrates the logical view of the management interfaces to the PCE and VEN.

REST API

REST API

REST API

REST API

Policy Compute Engine (PCE)

Commandine

Dynamic connection 8443 TCP (SasS)

443 TCP (SasS)

VEN

Ven

Ven

Advanced CLI tool on your local computer

Advanced CLI tool on your local computer

PCE and VEN Management Interfaces

This guide focuses on the use of the illumio-pce-ctl control script and related administrative programs on the PCE itself.

Interface	Notes
PCE web console	With the PCE web console, you can perform many common tasks for managing the Illumio Core.
PCE com- mand line	Use of the command line directly on the PCE. The illumio-pce-ctl command-line tool is the primary management tool on the PCE. You can perform many common tasks for managing the Illumio Core, including installing and updating the VEN.
REST API	With the Illumio Core REST API, you can perform many common management tasks, such as automate the management of large groups of workloads, rather than each workload individually. The endpoint for REST API requests is the PCE itself, not the workload. The REST API does not communicate directly with the VEN.
VEN com- mand line	The illumio-ven-ctl command-line tool is the primary management tool for the VEN.

# **PCE Control Interface and Commands**

The Illumio PCE control interface illumio-pce-ctl is a command-line tool for performing key tasks for operating your PCE cluster, such as starting and stopping nodes, setting cluster runlevels, and checking the cluster status.



#### **IMPORTANT**

In this guide, all command-line examples based on an RPM installation. When you install the PCE using the tarball, you must modify the commands based on your PCE user account and the directory where you installed the software.

The PCE includes other command-line utilities used to set up and operate your PCE:

- illumio-pce-env: Verify and collect information about the PCE runtime environment.
- illumio-pce-db-management: Manage the PCE database.

The PCE control interface can only be executed by the PCE runtime user (ilo-pce), which is created during the PCE RPM installation.

#### Control Command Access with usr/bin

For easier command execution, PCE installation creates softlinks in /usr/bin by default for the Illumio PCE control commands. The /usr/bin directory is usually included by default in the PATH environment variable in most Linux systems. When your PATH does not include /usr/bin, add it to your PATH with the following command. You might want to add this command to your login files (\$HOME/.bashrc or \$HOME/.cshrc).

export PATH=\$PATH:/usr/bin

# Syntax of illumio-pce-ctl

To make it simpler to run the PCE command-line tools, you can run the following Linux softlink commands or add them to your PATH environment variable.

```
$ cd /usr/bin
$ sudo ln -s /opt/illumio-pce/illumio-pce-ctl ./illumio-pce-ctl
$ sudo ln -s /opt/illumio-pce/illumio-pce-db-management ./illumio-pce-db-management
$ sudo ln -s /opt/illumio-pce/illumio-pce-env ./illumio-pce-env
```

After these commands are executed, you can run the PCE command-line tools using the following syntax:

```
$ sudo -u ilo-pce illumio-pce-ctl sub-command --option
```

Where:

sub-command is an argument displayed by illumio-pce-ctl --help.

# **PCE Organization and Users**

A PCE organization is a group of policies and users targeted toward a specific business group or unit, including all the networking security rules and people who are associated with the policy. An organization can contain any number of users, workloads, policy objects (rulesets, IP lists, services, and security settings), and labels.

Organizations are initially set up by your Illumio administrator. When an organization is created, an email is sent that contains a user login for the organization. When this user logs in, the organization is created, and users can now be invited to join.

# **Invite Users to Your Organization**

When you are an organization owner, you can invite other users to your organization and grant roles to specify permissions for those users.

When you invite a user to your organization, the user receives an email at the specified address that contains a link for their account setup. The link in invitation email is valid only for 7 days, after which it expires. If you invited a user who did not receive their email or did not sign up using that email, you can re-invite them.

#### **External Users and Non-Email Usernames**

When you use an external corporate Identity Provider (IdP) to authenticate users with the PCE, but your IdP usernames do not use email addresses, the PCE cannot send email invitations to those users when you add them to the PCE. When you add this type of user, send them a login URL that they can use to set up their Illumio Core accounts and log in to the PCE web console.

#### **Invitation Emails Are Not Sent**

When users you invite do not receive their invitation emails, the SMTP server might not be configured correctly with the PCE.

- Make sure that your PCE's IP address is allowed to relay messages and that its emails are not blocked by any anti-spam protection.
- Check your PCE's runtime\_env.yml file to make sure that the smtp\_relay\_address value is correct.

# **Access Configuration for PCE**

This section describes how to configure the PCE to control access.

#### **Role-based Access Control**

This section describes the concepts of role-based access control (RBAC) and how it works with the PCE.

#### **Overview of Role-based Access Control**

Security-oriented companies should grant employees the exact permissions they need based on their role. Illumio Core uses role-based access control (RBAC) to deliver security at an enterprise scale in the following ways:

Assign your users the least required privilege they need to perform their jobs.
 Limit access for your users to the smallest operation-set they need to perform their jobs; for example, monitor for security events.

- Implement separation of duties.
  - Delegate the responsibility to manage a zone to a specific team or delegate authority to application teams; for example, delegate a team to manage security for the US-West Dev zone, or assign the DevOps team to set security policy for the HRM application they manage.
- Grant access to users based on two dimensions: roles and scopes.
  - Each role grants access to a set of capabilities in Illumio Core. Scopes define the workloads in your organization that users can access, and are based on labels. A common set of label types include Application, Environment, and Location, but you may define additional label types and values using Flexible Labels. The scopes specify the boundaries of the sphere of influence granted to a user.
  - For example, a user can be added to the Ruleset Provisioner role with the scope Application CRM, Environment Staging, and Location US. With that access, the user could provision rulesets for workloads that are part of your CRM application in the Staging environment located in the US.
- Centrally manage user authentication and authorization for Illumio Core.
   Configure single sign-on with your corporate Identity Provider (IdP) and designate which external IdP groups should have access roles. Group membership is managed by your IdP while resource authorization is configured in Illumio Core.

#### **Use Cases**

Illumio designed our RBAC feature around a set of use cases based on the way that enterprises manage the security of the computing assets in their environment. These use cases encompass common security workflows for the modern, security-conscious enterprise. The personas include different levels of security professionals.

# **Support the Security Workflow**

Customers can configure the RBAC feature to support any type of responsibility bifurcation that they have in their workflow models. For example, the following workflows are supported:

- Architect-level professionals define all security policy for an enterprise by adding rulesets and rules in the PCE.
- Junior-level professionals provision rulesets and rules to workloads during maintenance windows. Junior personnel cannot edit any policy items in the Illumio PCE.
- Some users only view the infrastructure and alert senior team members when security issues occur

#### **Manage Security for Specific Workloads**

When you combine Illumio Core RBAC roles with scopes, you can secure access for IT teams who support specific applications or different geographic locations. For example, customers could delegate authority for workloads in the following ways:

- To manage security for workloads around silos; for example, a particular cloud provider like AWS.
- To decentralize their security policy to specific application teams allowing them to act quickly when managing application security without waiting for the central security team.
- To bifurcate the security of their infrastructure in such a way that one user is responsible only for the West coast assets and another user is responsible for the East coast assets.

#### **Features of Role-based Access Control**

Built-in Roles

Illumio Core includes several roles that grant users access to perform operations. Each role is matched with a scope. See About Roles, Scopes, and Granted Access [18] for information.

#### Granular Permissions

You can assign multiple roles to one user and by mixing and matching the different roles, you can achieve different levels of granularity of permissions.

You can grant different permissions to different users for different resources by defining scopes. For example, you might allow some users complete access to add rulesets for all workloads in your staging environment. For other users, you might grant access to all workloads in all environments. Users can be assigned exactly one role, representing their singular job function while other users can be assigned multiple roles, representing multiple job functions.

Identity Federation Using External Users and Groups

You can connect to external LDAP directories to manage users and user groups by configuring single sign-on (SSO) for the PCE.

Using this feature, you can create and manage users locally in PCE, or use an IdP to manage users and user groups from an existing directory. External user and user groups authenticate with the external IdPs.

#### Custom Role Assignments

You can customize access to suit your organization by specifying specific scopes for the Ruleset Manager and Ruleset Provisioner roles.

#### Audit Information

You can access an audit trail of user activity through the following reports:

- The User Activity page, which displays the authentication details for each user, when they logged in, and whether they are online.
- The Organization Events page, which displays when Organization Owners granted users access, when users logged in and out, and the actions they performed.

### **About Roles, Scopes, and Granted Access**

Illumio Core includes several roles that grant users access to perform operations. Each role is matched with a scope. You can add users (local and external) and groups to all the roles.

# **Roles with Global Scopes**

These Global Roles use the scope All Applications, All Environments, and All Locations. You cannot change the scope for these roles. The roles have the following capabilities in Illumio Core.

Role	Granted Access
Global Organization Owner	Perform all actions: add, edit, or delete any resource, security settings, or user account
Global Administra- tor	Perform all actions except user management: add, edit, or delete any resource or organization setting.
	This user can change settings in UI to allow administrators to choose whether to show warning for editing labels used by enforced workloads or not. The default is do not show warning.
Global Viewer	View any resource or organization setting.
	They cannot perform any operations. This role was previously called "Global Read Only."
Global Policy Object Provisioner	Provision rules containing IP lists, services, and label groups.
	They cannot provision rulesets, virtual services, or virtual servers, or add, modify, or delete existing policy items.



#### NOTE

You can add, modify, and delete your API keys because you own them.

# **About Read Only Users in the Global Viewer User Role**

The Read Only User role applies to all users in your organization—local, external, and users who are members of external groups managed by your IdP. This role allows users to view resources in Illumio Core when they are not explicitly assigned to roles and scopes in the PCE.

For example, you configure single sign-on for your corporate Microsoft Active Directory Federation Services (AD FS) so that users managed by AD FS can log into the PCE by using their corporate usernames and passwords. However, you haven't added all your external users to the PCE or assigned them to roles. These users can still log into the PCE by authenticating with the corporate IdP and view resources in the PCE.

The Read Only User role is not listed in the **Access Management** > **Global Roles** or **Scopes** pages because it is considered a default, catchall type of role. Users have access to this role on an organization-wide basis because you either enable or disable it for your entire organization. Additionally, you do not see it in the list of a user's role assignments when you view the user's details page (**Access Management** > **External Users** or **Local Users**). However, when the role is enabled for your organization, you see it listed in the **Access Management** > **User Activity** details for each user.



#### NOTE

You can enable and disable the Read Only User role from the **Access Management > Global Roles** page, by clicking the **Global Viewer** role.

When the Read Only User role is disabled for your organization, users who are not assigned to roles cannot access Illumio managed resources. When attempting to log into the PCE, they are still authenticated by their corporate IdP but the PCE immediately logs them out because they do not have access (even read-only access) to any Illumio managed assets.

# **Roles with Custom Scopes**

You can apply the following roles to specific scopes. These roles are called "Scoped Roles."

#### Role Granted Access

Full Ruleset Manager

- · Add, edit, and delete all rulesets within the specified scope.
- Add, edit, and delete rules when the provider matches the specified scope. The rule consumer can match any scope.



#### NOTE

You can choose the All Applications, All Environments, and All Locations scope with the Full Ruleset Manager role.

#### Limited Ruleset Manager

- · Add, edit, and delete all rulesets within the specified scope.
- · Add, edit, and delete rules when the provider and consumer match the specified scope.
- Ruleset Managers with limited privileges cannot manage rules that use IP lists, custom iptables rules, user groups, label groups, iptables rules as consumers, or have internet connectivity.



#### NOTE

You cannot choose the All Applications, All Environments, and All Locations scope with the Limited Ruleset Manager role.

#### Ruleset Viewer

- · Read-only access to rules that match the specified scope.
- · Ruleset Viewers cannot edit rules or rulesets.

#### Ruleset Provisioner

Provision rulesets within specified scope.



#### NOTE

You can choose the All Applications, All Environments, and All Locations scope and custom scopes with the Ruleset Provisioner role.

#### Workload Manager

Manage workloads and pairing profiles within the specified scope. Read-only access provided to all other resources.



#### NOTE

The 19.1.0 PCE does not support unpairing multiple managed workloads via the REST API when you are logged in as a Workload Manager. You can unpair workloads using the PCE web console because it restricts selection of workloads by the user's scope. However, via the REST API, the bulk unpair operation fails when multiple workloads are selected and one or more of the workloads are out of the user's scope.

#### **Workload Manager Role**

Use Case 1

You want to use scripts in your development environment to programmatically spin up and bring down workloads; your scripts create pairing profiles and generate pairing keys without you granting elevated Admin privileges to the scripts.

#### Use Case 2

Your application teams are in charge of changing the security posture of workloads, such as changing the policy enforcement states. You want to allow your application teams to manage workload security without granting them broad privileges, such as All access (for the standard Application, Environment, and Location label types, or for any customer label types you have defined).

#### Use Case 3

You want to prevent your PCE users from accidentally changing workload labels by moving the workloads in Illumination or Illumination Plus.

#### Solution

Users with the Workload Manager role can create, update, and delete workloads and pairing profiles. This role is a scoped role; when you assign a user to a scope, they can only manage workloads within the allocated scope. The Workload Manager can pair, unpair, and suspend VENs and change the policy state. It is an additive role; you can assign the Workload Manager role to a user and combine it with any other PCE role to provide additional privileges for that user.

### Configuration

- 1. Create a local user with "None" or the Global Viewer role (with Read Only User turned on).
- 2. Assign the Workload Manager role to the user.
- **3.** (Optional) Provide the invitation link to the new workload manager user.
- **4.** The workload manager can then log into the PCE and manage workloads and pairing profiles per the allocated scope.

The Workload Manager role is available under **Scopes**. Users assigned this role can view applications that are outside their scopes but can only modify those applications that are within their scopes.



#### NOTE

A workload manager user cannot clear traffic counters from workloads within their scope.

# **Example: Limited Ruleset Manager Role**

A user has the role Full Ruleset Manager role and access to the following scope:

All Applications | Production Environment | All Locations

The user can create and manage:

- Any ruleset that matches the Production environment
- Intra- or extra-scope rules that match this scope:
   All Applications | Production Environment | All Locations
   Where the provider and consumer of the rule are both within the Production environment scope.

For intra-scope rules, all workloads can communicate within their group (as defined by the scope), so the rule consumer is not restricted. However, in extra-scope rules, the Environment label of the resource selected as the consumer must match the label in the scope exactly.

The user cannot create a rule with the scope "All | All | All" because that scope is broader than the user's access, which is only for the Production environment.

Because the user is a member of the Limited Ruleset Manager role, the user cannot manage custom iptables rules and the following resources cannot be selected as consumers in extrascope rules:

- IP lists
- Label groups
- User groups
- Workloads

#### **Combine Roles to Support Security Workflows**

Illumio includes fine-grained roles to manage security policy. The roles control different aspects of the security workflow. By mixing and matching them, you can effectively control the access needed by your company.

Ruleset Only Roles

You can add users to the Full Ruleset Manager and Ruleset Provisioner roles so that they can edit the security policies on the workloads within their assigned scopes without affecting other entities, such as services, virtual services, or virtual servers.

These users can write rules for their workloads and provision them when the rules do not have dependencies on global objects, such as services or IP lists.

Ruleset Plus Global Policy Object Provisioner Roles

You can add users to the Ruleset Manager (Full or Limited) role and the Global Policy Object Provisioner role so that they can control the security policy for workloads.

These users can create rulesets within their assigned scopes and write rules that are not dependent on global objects. However, they can provision any workloads, even those containing services, IP lists, and label groups.


Global Organization Owner or Administrator Roles

You can add architect-level professionals to the Global Organization Owner or Global Administrator role so that they can define all security policy for an enterprise.

They have the capability to modify global objects, such as services and labels, add workloads, pair workloads, and change workload modes to function as a security policy administrator.

#### **Role Access is Additive**

In the following example, Joe Smith is added to two user roles and one external group and each is assigned a specific role and scope. Joe's ability to manage security for his company is a union of the roles and scopes he is assigned to.

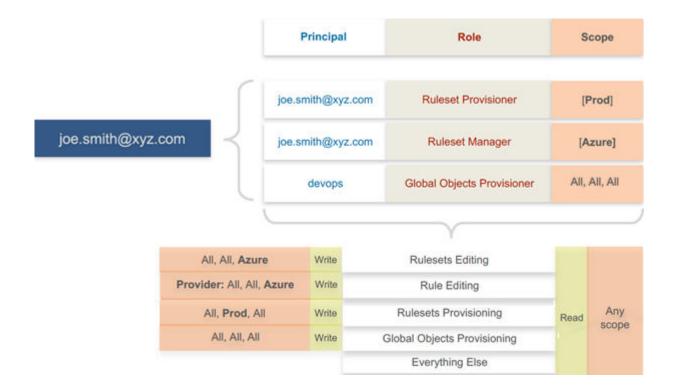

Exercise Caution when Combining Roles

Because role access is additive, some caution is advisable when assigning more than one role to a user. Be sure you do not grant permissions beyond what is intended. For example, suppose you are assigning a scoped role to a user. The user's access will be restricted to workloads within the defined scope. If you then assign the Global Read Only role to the same user, the user will be able to view all workloads, including those outside the scope that was defined in the first role.

#### **Example Role Workflows**

The following example shows the hand offs between a user who is a member of the Global Organization Owner role and a member of a Ruleset Manager role.

- 1. An Organization Owner grants access to one or more scopes for a Ruleset Manager by selecting specific labels, which define the permitted scopes for the Ruleset Manager.
- 2. The Ruleset Manager logs in and creates rules that conform to the specified scopes, as defined by the labels that are accessible to that user.
- **3.** The Ruleset Manager has read-only access to all other PCE resources, such as services or rulesets with different scopes from the scopes that the Ruleset Manager can access.
- **4.** The Organization Owner reviews the rules created by the Ruleset Manager and provisions them as needed.

# **Prerequisites and Limitations**

- You must be a member of the Global Organization Owner role to manage users, roles, and scopes in the PCE.
- Configuring SSO for an Illumio supported IdP is required for using RBAC with external users and groups.
  - If you have not configured SSO, you can still add external users and external groups to the PCE; however, these users will not be able to log into the PCE because they will not be able to reach the IdP or SAML server to authenticate.
- Illumio resources that are not labeled are not access restricted and are accessible by all users.
- External users who are designated by username and not an email address in your IdP will not receive an automatic invitation to access the PCE. You must send them the PCE URL so they can log in.
- You cannot change the primary designation for users and groups in the PCE; specifically, the email address for a local user, the username or email address for an external user, or the contents of the External Group field for an external group. To change these values, you must delete the users or groups and re-add them to the PCE.
- An App Owner who is in charge of the application in both production and development environments does not have permissions to write extra-scope rules between production and development.

Local users are not locked out of their accounts when they fail to log in. After 5 consecutive failures, the PCE emails the user that their account might be compromised.

Locked users retain all their granted access to scopes in the PCE; however, they cannot log into the PCE.

# **Role-based Access for Application Owners**

The enhancements made to the Role-based Access Control (RBAC) framework in the Illumio Core 20.1.0 release enable organizations to address several use cases related to application owners.

# **Overview**

These enhancements include:

- Delegation of policy writing to downstream application teams.
- Assigning read-only privileges to application owners. Those users get read access based on the assigned scopes.
- Flexibility to assign read/write or read-only privileges to the same user for different applications. For example, the same user can have read/write privileges in a staging environment but has read-only privileges in a production environment.

Although the RBAC controls in releases prior to Illumio Core 20.1.0 restricted "writes" based on user role and scope, users had visibility into all aspects of the PCE irrespective of the role. With these new RBAC controls, application owners get visibility into the applications within their assigned scopes, specifically the PCE information relevant to their applications. Depending on the user's role, application owners can:

- Read/write policies to manage application segmentation.
- View inbound and outbound traffic flows as well as use Explorer.
- View labeled objects used in policies.
- View details of global objects such as, IP Lists and Services used by their applications.

#### **Benefits**

The key benefits of the RBAC framework in the PCE are as follows:

- Provides a label based approach to define user permissions.
- Provides roles based on application owner personas to manage application segmentation.
- Provides a building block based approach to stack permissions for users.
- Offers flexibility to delegate read/write and read-only privileges to same user for different sets of applications.
- Enables enforcement of least privilege by hiding information outside of an application scope.
- Allows application owners to effectively manage segmentation for their applications.

#### **Updates to Roles**

As described in About Roles, Scopes, and Granted Access [18], Illumio Core provides two types of user roles - Global and Scoped. It also provides the ability to stack multiple roles for the same user.

A PCE owner can assign multiple roles to the same user. The resulting set of permissions is the summation of all permissions included with each stacked role.

- Existing scoped roles enhanced to restrict reads by scope.
- The new scope-based *read-only* role limits read access by labels.
- Scoped users get limited visibility into objects 1-hop away (this applies to Explorer, App Group Maps, Rule Search, and Traffic).
- Global read-only is disabled by default for new PCE installations.
- PCE performance and scale enhanced to support concurrently active users.

#### **Global Roles**

Global roles allow the user to view everything and perform operations globally. The four Global roles are :

- Global Organization Owner: Allowed to manage all aspects of the PCE, including user management.
- Global Administrator: Allowed to manage most aspects of the PCE, except user management.
- Global Viewer: Allowed to view everything within the PCE in a read-only capacity. This role was previously called "Global Read-only".
- Global Policy Object Provisioner: Allowed to provision global objects that require provisioning, such as Services and Label Groups.

#### **Scoped Roles**

The Scoped roles are defined using labels. The permissions included with the assigned role apply only to the assigned scope, where the scope is defined using a combination of as many label types as you have defined (and with only one label value per type). To provide permissions to different applications for a user, each of the application scopes has to be added to the same user.

All the Scoped roles have been enhanced to restrict reads and writes by Scope. The Scoped roles are:

- Ruleset Viewer: A new scope-based read-only role. A user with this role has read-only permissions within the assigned scope. The user can view policy, application groups, incoming and outgoing traffic, and labeled objects, such as workloads, within the assigned scope.
- Ruleset Manager (Limited or Full): An existing scope-based read/write role. A user with this role can read/write policy within the assigned scope. The user can also view application groups, incoming and outgoing traffic, and labeled objects within the assigned scope.
- Ruleset Provisioner: This role allows a user to provision changes to scoped objects, provided the objects are inside the user's assigned scope. A user with this role can also provision changes to policies within the assigned scope. The user can also view application groups, incoming and outgoing traffic, and labeled objects within the assigned scope.
- Workload Manager: This role allows a user to perform workload-specific operations such as pairing, unpairing, label assignment, and changing policy state. A user with this role cannot view policies and traffic and cannot provision changes.

# Configuration

The Global Read-only user setting should be disabled to enforce scoped reads for users with scoped roles. To disable this setting, make sure that the *Read Only User* setting under **Access**Management > Global Roles > Global Viewer is set to Off.




#### NOTE

In PCE versions 20.1.0 and higher, the Global Read-only user setting is disabled by default.

On PCE versions upgraded from prior releases, this setting must be manually turned off for users to have reads restricted by scope. If this setting is se **On**, users with scoped roles will get global visibility by default.

# **Figure 1. Global Viewer Setup**

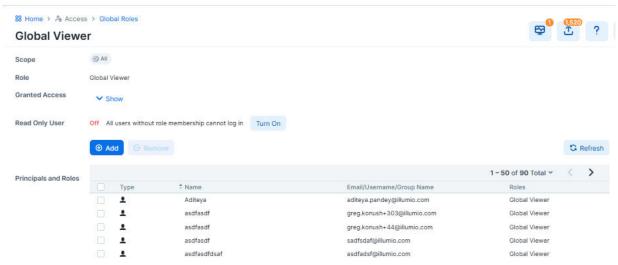

Manage Global Owners

# **Facet Searches for Scoped Roles**

The Scopes page now features a search bar with auto-complete and facets. This is restricted to users with a Global Organization Owner role. To use this feature, navigate to **Access**Management > Scopes. The search bar allows Organization Owners to query a list of users by a user's role. They can search by labels and label groups to get a list of users with the selected label(s) in their assigned scope(s), or for users with no labels assigned. They can also select Principals to search for a specific user.

#### **Ruleset Viewer**

Ruleset Viewer is a new scope-based read-only role. When assigned, a user get read-only visibility into the assigned application scope. As a Ruleset Viewer, you can view all the Rulesets and Rules within the assigned scope. However, you cannot edit any of the rules or create new rules. You can use Policy Generator to preview the policies that will be generated. However, you are not allowed to save policy after previewing it using Policy Generator.

A Ruleset Viewer is allowed to view everything that a Ruleset Manager with the same scope is allowed to view. This includes traffic flows, labeled objects, application groups, global objects, and so on. The only difference between a Ruleset Manager and a Ruleset Viewer is the absence of write privileges for a Ruleset Viewer. A Ruleset Manager is allowed to create and update policy within the application scope.

## **Scoped Roles and Permissions**

The following table provides a summary of the different permissions provided with each of the scoped roles.

- (R) = Restricted based on scope
- (T) = Restricted based on resource type
- --- = Not applicable

Page	Ruleset Viewer (Scoped Read-Only)	Ruleset Manager	Ruleset Provisioner	Workload Manager	Application Owner (Combined Permis- sions)
Traffic - Illuminatio	n, App Group, Explo	rer			
Illumination Lo- cation Map					
App Group Policy Map	Read (R)	Read (R)	Read (R)		Read (R)
App Group Vul- nerability Map	Read (R)	Read (R)	Read (R)		Read (R)
App Group List	Read (R)	Read (R)	Read (R)		Read (R)
Explorer	Read (R)	Read (R)	Read (R)		Read (R)
Blocked Traffic	Read (R)	Read (R)	Read (R)		Read (R)
Policy					
Policy Genera- tor	Read (R)	Read+Write (R)	Read (R)		Read+Write (R)
Rulesets and Rules	Read (R)	Read+Write (R)	Read (R)		Read+Write (R)
Rule Search	Read (R)	Read (R)	Read (R)		Read (R)
Policy Check	Read (R)	Read (R)	Read (R)		Read (R)
Provisioning Draft Changes	Read (R)	Read (R)	Read+Write (R)		Read+Write (R)
Policy Versions	Read (R)	Read (R)	Read (R)		Read (R)
Provisioning Status	Read (R)	Read (R)	Read (R)		Read (R)
Labeled Objects					
Workloads	Read (R)	Read (R)	Read (R)	Read+Write (R)	Read+Write (R)
Container Workloads	Read (R)	Read (R)	Read (R)	Read (R)	Read (R)
Virtual Enforce- ment Nodes	Read (R)	Read (R)	Read (R)	Read+Write (R)	Read+Write (R)
Pairing Profiles				Read+Write (R)	Read+Write (R)
Virtual Services	Read (R)	Read (R)	Read (R)	Read (R)	Read (R)
Virtual Servers	Read	Read	Read	Read	Read

Global Policy Objects         Services       Read       Read       Read       Read       Read         IP Lists       Read       Read       Read       Read       Read         User Groups       Read       Read       Read       Read       Read       Read         Labels       Read       Read       Read       Read       Read       Read         Label Groups       Read       Read       Read       Read       Read       Read	d
IP Lists     Read     Read     Read     Read       User Groups     Read     Read     Read     Read       Labels     Read     Read     Read     Read	d
User Groups Read Read Read Read Read Read Read Read	d
Labels Read Read Read Read	
Label Groups Read Read Read Read Read	b
	b
Settings	
Segmentation Templates	
Role-Based Ac cess Global Roles	
Role-Based Ac	
Role-Based Ac cess Users and Groups	
Role-Based Ac ity	
Load Balancers	
Container Clus ters	
Bi-directional Routing Net-works	
Event Settings	
Setting Security	
Setting Single Sign-On	
Setting Pass word Policy	
Setting Offline Timers	

Page	Ruleset Viewer (Scoped Read-Only)	Ruleset Manager	Ruleset Provisioner	Workload Manager	Application Owner (Combined Permis- sions)
VEN Library				Read	Read
My Profile	Read+Write	Read+Write	Read+Write	Read+Write	Read+Write
My API Keys	Read+Write	Read+Write	Read+Write	Read+Write	Read+Write
Other					
Support Re- ports				Read+Write (R)	Read+Write (R)
Events					
Reports	Read (R, T)	Read (R, T)	Read (R, T)	Read (R, T)	Read (R)
Support	Read	Read	Read	Read	Read
PCE Health					
Product Version	Read	Read	Read	Read	Read
Help	Read	Read	Read	Read	Read
Terms	Read	Read	Read	Read	Read
Privacy	Read	Read	Read	Read	Read
Patents	Read	Read	Read	Read	Read
About Illumio	Read	Read	Read	Read	Read

### **Scoped Users and PCE**

Each scoped role has different permissions that impact an application owner's visibility into various aspects of the PCE. Application owners can be assigned scoped roles that come with different permissions.

#### **Navigation Menus**

The PCE navigation menu options vary based on the user's role. The navigation menu options available for Application Owner are limited. For example, a user is logged in as a Global Organization Owner has more (complete) menu options displayed than when a user logs in as a scoped user (Application Owner).

The following table provides the menu options available for different scoped users.

- Y = Yes (menu option is displayed for the user)
- N/A = Not applicable (menu option is hidden from the user)

Page	Ruleset Viewer	Ruleset Manager	Ruleset Provision- er	Workload Manager
Illumination Map	N/A	N/A	N/A	N/A
Role-based Access	N/A	N/A	N/A	N/A
Policy Objects > Segmentation Templates	N/A	N/A	N/A	N/A
Policy Objects > Pairing Profiles	N/A	N/A	N/A	Υ
Infrastructure	N/A	N/A	N/A	N/A
Troubleshooting > Events	N/A	N/A	N/A	N/A
Troubleshooting > Support Reports	N/A	N/A	N/A	Υ
Settings	N/A	N/A	N/A	See row below
Settings > VEN Library	N/A	N/A	N/A	Υ
PCE Health	N/A	N/A	N/A	N/A
App Groups > Map	Υ	Υ	Υ	N/A (App Group Members are visible)
App Groups > List	Υ	Υ	Υ	Υ
App Groups > Vulnerability Map	Υ	Υ	Υ	N/A
Explorer	Υ	Υ	Υ	N/A
Policy Generator	Υ	Υ	Υ	N/A
Rulesets and Rules	Υ	Υ	Υ	N/A
Rule Search	Υ	Υ	Υ	N/A
Workload Management > Workloads	Υ	Υ	Υ	Υ
Workload Management > Container Workloads	Υ	Υ	Υ	Υ
Workload Management > Virtual Enforcement Nodes (Agents)	Υ	Υ	Υ	Υ
Provision > Draft Changes	Υ	Υ	Υ	N/A
Provision > Policy Versions	Υ	Υ	Υ	N/A
Policy Objects > IP Lists	Υ	Υ	Υ	Υ
Policy Objects > Services	Υ	Υ	Υ	Υ
Policy Objects > Labels	Υ	Υ	Υ	Υ

Page	Ruleset Viewer	Ruleset Manager	Ruleset Provision- er	Workload Manager
Policy Objects > User Groups	Υ	Υ	Υ	Υ
Policy Objects > Label Groups	Υ	Υ	Υ	Υ
Policy Objects > Virtual Services	Υ	Υ	Υ	Υ
Policy Objects > Virtual Servers	Υ	Υ	Υ	Υ
Troubleshooting > Blocked Traffic	Υ	Υ	Υ	N/A
Troubleshooting > Export Reports	Υ	Υ	Υ	Υ
Troubleshooting > Policy Check	Υ	Υ	Υ	N/A
Troubleshooting > Product Version	Υ	Υ	Υ	Υ
Support	Υ	Υ	Υ	Υ
My Profile	Υ	Υ	Υ	Υ
My Roles	Υ	Υ	Υ	Υ
My API Keys	Υ	Υ	Υ	Υ
Help	Υ	Υ	Υ	Υ
Terms	Υ	Υ	Υ	Υ
Patents	Υ	Υ	Υ	Υ
Privacy	Υ	Υ	Υ	Υ
About Illumio	Υ	Υ	Υ	Υ

# **Landing Page**

The PCE landing page changes dynamically based on the user's role. The Illumination page opens when you log in to your account as an Organization Owner. However, when you log in as a Scoped user, the landing page changes to the App Groups List page where you can see the list of App Groups assigned.

# **Labeled Objects**

The scope of the user filters labeled objects, such as workloads. On the Workloads page, you will only see the list of the workloads within the application scope. You cannot see any workloads that are outside the application scope. This applies to any labeled object, such as workloads, containers, Virtual Services, and Virtual Enforcement Nodes (VENs).

The menu functions and buttons change dynamically to reflect a user's permissions. If logged in as a Ruleset Manager, you cannot manage workloads. So, all the workload-specific operations buttons are disabled. However, you can view the list of workloads within the scope and get details for individual workloads, except for Virtual Servers.



#### NOTE

While Virtual Servers are considered labeled objects, they are visible to all scoped users regardless of object scope.

#### **Facet Searches and Auto-complete**

The search bar with auto-complete and facets is scoped for labeled objects and Rulesets. For example, if you search for Application Labels, you can only select the Application Labels under the assigned scope. This applies to other label types such as Environment labels and Location labels. However, Role labels are excluded since Role labels are not part of the user scope. The restriction of visibility by scope applies to facets such as hostname, IP address, etc. The search bar automatically filters the facets to the list of facets in the user's assigned scope.

#### **Global Objects**

Scoped users get complete read-only visibility into all global objects. This includes IP Lists, services, labels, label groups, and user groups. However, scoped users cannot create, modify, or provision global objects.



#### NOTE

Only the Global Organization Owner and Global Administrator can create, modify, and provision global objects.

#### **Rulesets and Rules**

Scoped users, except Workload Managers, can see rulesets and rules that apply to their applications. A Ruleset Manager can edit the ruleset, whereas the other scoped roles (Ruleset Viewer and Ruleset Provisioner) can view rulesets. A scoped user can see all the rules within the application ruleset.

When label groups are used within the scope of a ruleset, a Ruleset Manager may not be allowed to edit the ruleset and its rules even if there is a scope match between the user's assigned scope and the underlying scope of the ruleset. The user will, however, be able to view the rules within such a ruleset.


In addition, scoped users can also see rules that apply to their applications. For example, scoped users can view rules written by other applications that apply to their application. To see those rules, click **Rule Search** from the navigation menu.

On the Rule Search page, a scoped user can see all the rules that apply to their application. This includes rules for incoming and outgoing traffic flows. The rules highlighted in the screenshot below are the outbound rules which are for your application. The application owner provides visibility to all the rules that are applied to your application.

# **App Group Map**

The App Group Map provides complete visibility into applications and everything inside the application. Scoped users, with the exception of Workload Managers, can view App Group Maps. Scoped users get complete visibility into everything inside their application group. Scoped users can see workload objects, labels, traffic flows, and every other detail within their application group.

Scoped users get limited visibility for connected App Groups such as Providing App Groups and Consuming App Groups. Scoped users get limited information on endpoints with traffic flows to their application. For an endpoint in a connected App Group from which there is traffic flow, scoped users can get limited information such as labels, role names, and hostnames. The scoped user is not allowed to view any other endpoints in the connected App Group from which there are no traffic flows.

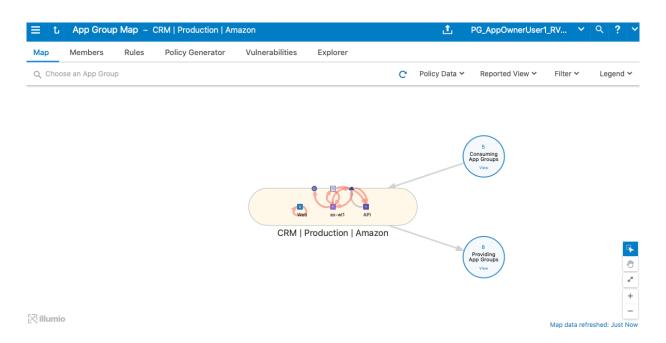

# **Policy Generator and Explorer**

With Policy Generator, scoped users can generate policies only for their applications. Only Ruleset Managers can generate policies with Policy Generator. Ruleset Viewers can preview Policy Generator without the ability to save the policy.

Explorer views are also filtered for scoped users. To use Explorer, one of the endpoints has to be within the scoped user's application. The same applies to Blocked Traffic.

# **My Roles**

"My Roles" is a new feature that allows you to view the list of assigned permissions (roles).

# **Configure Access Restrictions and Trusted Proxy IPs**

To employ automation for managing the PCE environment, you can use API Keys created by an admin user and automate PCE management tasks. This section tells how you can restrict the use of API keys and the PCE web interface by IP address. In this way, you can block API requests and users coming in from non-allowed IP addresses.

# **Configure Access Restrictions**

This section tells how to use the Illumio web console UI to configure access restrictions. You can also configure access restrictions programmatically using the REST API calls described in Access Restrictions and Trusted Proxy IPs in REST API Developer Guide.

- You must have the global Org Owner role to view or change access restrictions.
- A maximum of 50 access restrictions can be defined.

To configure access restrictions:

- 1. Log in to the PCE web console as a user with the Global Org Owner role.
- 2. Open the menu and choose Access Management Access Restrictions.

The Access Restriction page opens with a list that shows which IP addresses are allowed and where the restrictions have been applied.

3. To add a new restriction, click Add.

The Add Access Restriction page opens.

Provide the required attributes:

- Provide a name.
- In **Restriction Applies To**, choose User Session, API Key, or Both. Access restrictions can be applied to these different types of user authentication.
- List a maximum of eight IPv4 adresses or CIDR blocks.
- 4. Click **Edit** to edit the restriction.
- 5. View the access restrictions applied to local users. The default is blank, no restrictions.
- **6.** You can assign access restrictions to local and external users or user groups. To add a local user:
  - a. Click Add.
  - b. In **Access Restriction**, choose the type of access restriction.
  - c. Click Add.
- 7. View the local user's detail page. To modify the user settings, click **Edit User**.
- 8. Use the Edit User dialog to apply restrictions.
  - If an Org Owner assigns an access restriction to any Org Owner, a warning is shown, because this can result in the Org Owner user losing access to the PCE.
- 9. View the list of API keys in the API Keys page and the Event page.


### **Configure Trusted Proxy IPs**

This section tells how to use the Illumio web console UI to configure trusted proxy IPs. You can also configure trusted proxy IPs programmatically using the REST API calls as described in Access Restrictions and Trusted Proxy IPs in REST API Developer Guide.

When a client is connected to the PCE's haproxy server, this connection can traverse one or more load balancers or proxies. Therefore, the source IP address of a client connection to haproxy might not be the actual public IP address of the client.

- 1. Log in to the PCE web console as a user with the Global Org Owner role.
- 2. Select Settings -> Trusted Proxy.
- 3. In the Trusted Proxy IPs page, click Edit.
- **4.** A list of trusted proxy IPs is displayed. Proxy configuration can have upto 8 Trusted Proxy IPs.
- **5.** To remove any of the proxies from the list, select the checkbox in front of the proxy address and click **Remove**.

- 6. To edit Trusted Proxy IPs, click Edit.
- 7. In the Edit Trusted Proxy IPs dialog box, you can add a proxy IP address to the list, or delete any of the existing addresses by howering over the number in front of the address and then clicking the Trash Can icon that shows up.

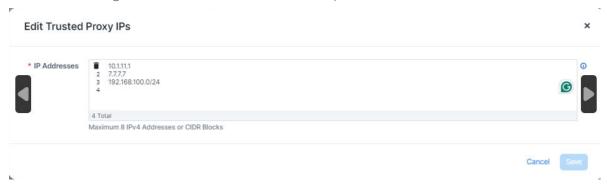


8. Once you have added or deleted the proxy addresses for your needs, click Save.

# Manage API Keys

You can add and edit API keys using the PCE console;

#### **Creating API Keys**

- 1. In the Web console, type "API keys"in the Search field.
- 2. In the API Keys page, click Add.
- 3. In the "Create API Key" pop-up dialog, add the
  - a. Key Name
  - **b.** Description of the key
  - c. Org ID
- 4. Click Create.
- 5. The confirmation dialog appears to show the data for the created API key.

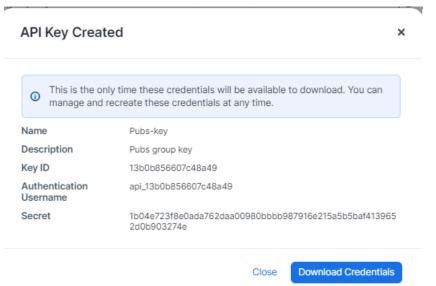

6. To download the credentials, click on **Download Credentials**.

You can download the credentials only after the key is created. You can, however, manage the credentials at any time.

7. The credentials will be downloaded in the default download directory on you hard drive, with the name API-Key-<your-key-name>. The format of the credential is a TXT file.

{"key\_id":"13b0b856607c48a49","auth\_username":"api\_13b0b856607c48a49","secret":"1b04e723f8e0ada762daa00980bbbb987916e215a5b5baf4139652d0b903274e"}

### **Editing Expiration of API Keys**

To edit expiration of the Service account API keys using the PCE console:

- 1. Select **Settings -> API Keys**.
- 2. On the API Key Settings page, click Edit.
- **3.** By default, API Key for Service Account expires in:
  Select from thr dropdown list: Never expires, 1 day, 30 days, 60 days, or 90 days.
  If you change this setting, expiration of the existing API keys will not be impacted.
- **4.** Keep expired API keys for: Select from the dropdown list: 1 day, 30 days, 60 days, 90 days, or custom.

## **Password Policy Configuration**

The PCE enforces password policies that only a Global Organization Owner can configure. In the PCE web console, you set password policies that the PCE enforces, such as password length, composition (required number and types of characters), and password expiration, re-use, and history.

# **About Password Policy for the PCE**

You need to be a Global Organization Owner to view the Password Policy feature under the Settings > Authentication menu options.

Prior to Illumio Core 18.2.0, a Global Organization Owner set the password in the PCE by using the PCE runtime script. The settings in the PCE runtime script are the same as before Illumio Core 18.2.0, except that the password length can now be set to a maximum of 64 characters.



#### NOTE

The Password Policy feature is not applicable for organizations using SAML authentication.



#### NOTE

Permission to edit this setting is dependent on your role.

## **Password Requirements**

The password requirements you set are displayed to users when they are required to change their passwords. You can set the minimum character length, ranging from a minimum of 8 characters to a maximum of 64 characters. The default length is 8 characters.

A Global Organization Owner should configure passwords based on the following categories:

- Uppercase English letters
- Lowercase English letters
- Numbers 0 through 9 inclusive
- Any of the following special characters: ! @ # \$ % ^ & \* < > ? .



### **WARNING**

Any other special characters are neither tested nor supported.

You have to select at least three of the above categories. The default password requirement is one number, one uppercase character, and one lowercase character. You can set the password to use either one or two characters from each category.

## **Password Expiration and Reuse**

You can set the password expiration range from 1 day to 999 days. The default setting for password expiration is "Never."

You can set the password reuse history from 1 to 24 passwords before a user can reuse the old password. The default setting is five password changes before reuse of the password is allowed.



#### NOTE

The number of password changes before password reuse is allowed is the value you enter + 1 (the current password). For example, when you specify 3, the number of passwords before reuse is allowed is 4.

You can also set the similarity of a password by not allowing a user to change their password unless it changes from a minimum of 1 to a maximum of 4 characters and positions from their current password.

Allowable password reuse and password history can be set to from 1 to 24 passwords before reuse is allowed. The default setting for password reuse is five password changes before reuse is permitted.

### **Caveats**

- When a Global Organization Owner increases the required minimum password length policy or increases the password complexity requirements and enables the password expiration (1-999 days), all the existing users must reset their passwords based on the new policy.
- When a Global Organization Owner configures the password to never expire, all users who were migrated from an older release to 18.2.0 must reset their passwords when they next log in.

# **Change Password Policy Settings**

- 1. From the PCE web console menu, choose **Access > Authentication**.
- **2.** In the Authentication Settings screen, choose the Authentication Method to authenticate users for accessing the PCE:

LOCAL (IN USE): User will sign in to the PCE only with a local credential provided by the user's organization password policy.

SAML (IN USE): SAML users can also authenticate to the PCE using local credentials.

LDAP: LDAP user can also authenticate to the PCE using local credentials>

- **3.** Once you decide which option to take, click on the **Configure** button.
- **4.** Depending on the authentication method, these are the available options: Choose option LOCAL, SAML, or LDAP:

LOCAL (in use)					
Password requirements					
Min lengths	8 characters				
Character categories	A-Z (required),				
	a-z (required),				
	0-9 (required)				
Min characters per category	1				
Password expiration and reuse					
Expiration	Never				
Reuse history	1 password changes				
Similarity	1 character and position from the current password				
Session timeout	The session expiration timeout values must be set accordingly to balance security and usability so that your users can comfortably complete operations within the PCE web console without their session frequently expiring. The timeout value is dependent on how critical the application and its data are. For example, you might set the timeout to 3-5 minutes for high-value applications and 15-30 minutes for low-risk applications.				
	The changed session timeout value applies to new browser sessions. Existing browser sessions are not affected when the session timeout value is changed.				
	The PCE Org owner can go to <b>Access &gt; Authentication &gt; Local</b> to configure Session Timeout. This PCE session timeout is applicable to any user belonging to the same organization, regardless whether they are local or external users.				
Timeout	30 minutes				

SAML (in use)	
Information from Identity provider	

SAML (in use)				
SAML Identity provider certificate	BEGIN CERTIFICATE MIICpDC- CAYWCCQD05WZzgx RugDANBgkqhkiG9w0BAQsFADAUMRIWEAYDVQQD- DAlsb2NhbGhvc 3QwHhcNMTgxMTE0MjAyNzM2WhcNMjgxMTExM- jAyNzM2WjAUMRIW EAYDVQQDDAlsb2NhbGhvc3QwggEiMA0GCSqGSIb3DQEBA- QUAA4I BDwAwggEKAoIBAQDXs/OhH90IPQ8qBrUMqzQZb5MI72fu+Ay0s P8gIiV8RiUqSl+WJNo8s9L8GNI9hnQT+OXg99PNmoE4lxiAlnx qx8T78Qxb9zX3uc4hec+9bMSF7iieUiFXWQQrIUVM3g8TWI6B5g Uapt0vZcxNok2eNhiFvVTLgPzB06vb2/yU68ilwQ8wz/MG000Un/ lRw3LORy- nEAluMeT6terWtX8JQGbvclqYddnXD86Y5MOPlAXU+ lwlw1JFxD0uKiu0HJv- NYfJjkisEbDis9bO/E00SyayVA7ABELaw QTfeWM6xLrNhZCTGeQiKb4XHMBgeliA- loEvNDDofKbLDQrWUyIf7 TAgMBAAEwDQYJKoZIhvcNAQELBQADggEBANLhqsZs- FUnq7kc+B5a vMmOXbCNJmSaASBULsX+akexhyJdMZUxmN6wfLjZ3FOwxvFuhe- Ta ZpkplUtC+2E9YlxY//FxOX/YyvNT/xf0BzqZ9SCsNxpCBsSRK5X4 DS+2jGQuz3fwbJDxTXP4sKNUZ/E9Z+dC9Npdq7xtcXr7pWhI2qe M08E9LdvfWLcsqq8Z0VtxyHYYZYNh8KN0Q6ObfKlsPC4QZ/292B xm2ckxsWDTyONV8ytLQKwp93exxqmzzpbz6qi23y0B4u4af+/SW9 ukjzD/ atP34bYlYjeLBCsKEgylnDTVgypAZSEy46kJ9mAu6t3r4/gEg XTkMYQDtrPA=END CERTIFICATE			
Remote login URL	https://hohoho.illumio.com			
Logout landing URL	https://hohoho.illumios.com/1logout			
information for identity provider				
Authentication method	unspecified			
Force re-authentiu- cation	no			
Sign SAML request	no			
SAML version	2.0			
Issuer URL	https://2x2testlab360.ilabs.io:8443/login			
NameID format	urn:oasis:names:tc:SAML:1.1:nameid-format:emailAddress			
Assertion consumer URL	https://2x2testlab360.mylabs.io:8443/login/acs/6b5243ef-2305-4ffd-bf81-4fa97fb91a5b			
Logout URL	https://2x2testllab360.mylabs.io:8443/login/logout/6b5243ef-2305-4ffd-bf81-4fa97fb91a5b			
Timeout	30 minutes			

- **5.** LDAP authentication is not active. Click **Turn On** to apply on all the LDAP servers.
- 6. To create an LDAP server, click on Create Server.

To continue with LDAP server configuration, see the "LDAP Authentication" topic.

## Authentication

The Illumio PCE supports the use of either SAML SSO or LDAP as an external authentication method. Both SAML SSO and LDAP cannot be used at the same time. When LDAP is turned on, the use of SAML SSO, if already configured, is disabled. Similarly, enabling SAML SSO after LDAP is enabled will disable LDAP authentication.

### **SAML SSO Authentication**

When you use a third-party SAML-based Identity provider (IdP) to manage user authentication in your organization, you can configure that IdP to work with the PCE. By configuring a single sign-on (SSO) IdP in the PCE, you can validate usernames and passwords against your own user management system, rather than having to create additional user passwords managed by the Illumio Core.

Illumio Core currently supports the following SAML-based IdPs:

- Azure AD
- Microsoft Active Directory Federation Services (AD FS)
- Okta
- OneLogin
- Ping Identity



#### NOTE

You can use other SAML-based IdPs; however, configuring those IdPs is your responsibility as an Illumio customer.

Before you configure SSO in the PCE, you need to configure SSO on your chosen IdP and obtain the required SSO information. After obtaining the IdP SSO information, log into the PCE web console and complete the configuration.

## **PCE Information Needed to Configure SSO**

Before you configure SSO in the PCE, obtain the following information from your IdP:

- x.509 certificate
- Remote Login URL
- Logout Landing URL

The PCE supports the following optional attributes in the SAML response from the IdP:

- User.FirstName First Name
- User.LastName Last Name
- User.MemberOf Member of

Details

User email address is the primary attribute used by the PCE to uniquely identify users.



## **IMPORTANT**

The client browser must have access to both the PCE and the IdP service. The Illumio PCE uses HTTP-redirect binding to transmit SAML messages.

To obtain the SSO information from the PCE:

- 1. From the PCE web console menu, choose Access Management > Authentication.
- 2. On the Authentication Settings screen, locate the SAML configuration panel and click **Configure**.
- **3.** Use the displayed information (as shown in the example below) while configuring your specific IdP.

#### Information for Identity Provider

Authentication Method Unspecified

Force Re-authentication No

SAML Version 2.0

Issuer https://c | |3/login |

NameID Format urn:oasis:names:tc:SAML:1.1:nameid-format:emailAddress

Assertion Consumer URL https:// | |3/login/acs/a63e | 49598e

Logout URL https:// | |43/login/logout/a63e | 349598e



### NOTE

Even though the SAML NameID format specifies an emailAddress, the PCE can support any unique identifier such as, userPrincipalName (UPN), common name (CN), or samAccountName as long as the IdP is configured to map to the corresponding unique user identifier.

# **Signing for SAML Requests**

There are four new APIs you can use to sign SAML requests:


- GET /authentication\_settings/saml\_configs
- GET /authentication\_settings/saml\_configs/:uuid
- PUT /authentication\_settings/saml\_configs/:uuid
- POST /authentication\_settings/saml\_configs/:uuid/pce\_signing\_cert

These APIs are covered in detail in REST API Developer Guide.

Signing of SAML requests is, however, disabled by default.

To enable SAML request signing:


- 1. Using the Web Console, go to Access Management > Authentication.
- 2. In the Authentication Setting screen, select Configure button for SAML.
- **3.** In the SAML screen, click **Turn On**.

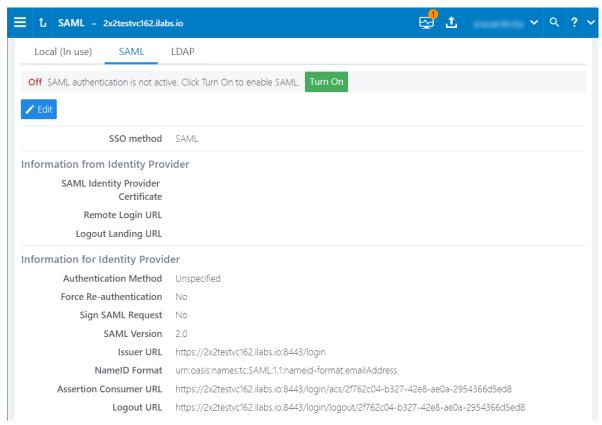


4. In the pop-up screen, click Confirm.



Confirm SAML as the default authentication setting?

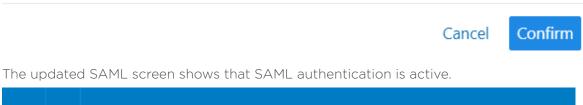

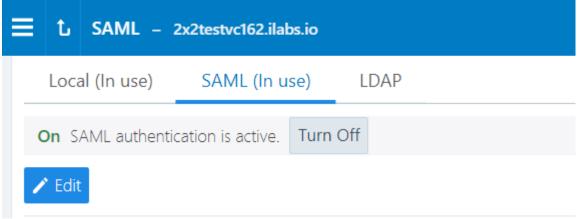

If necessary, you can disable it at any time.

Once configured using these steps, the lifetime of the SAML certificate is ten years.

#### LDAP Authentication

The PCE supports LDAP authentication for users with OpenLDAP and Active Directory. The PCE supports user and role configuration for LDAP users and groups. You can configure up to three LDAP servers and map users and user groups from your LDAP servers to PCE roles. Core Cloud does not support LDAP authentication.

To use LDAP authentication:

- 1. Review the Prerequisites and Limitations [44].
- 2. Enable the PCE to use LDAP authentication. See Enabling LDAP Authentication [44].
- **3.** Set up an LDAP configuration. See Configuring LDAP Authentication [45].
- **4.** Map your LDAP groups to one or more PCE roles. See Map LDAP Groups to User Roles [46].

## **Prerequisites and Limitations**

Before configuring LDAP for authentication with the PCE, complete the following prerequisites, and review the limitations.

Determine Your User Base DN (Distinguished Name)

Before you map your LDAP settings to PCE settings, determine your user base distinguished name ("DN"). The DN is the location in the directory where authentication information is stored.

If you are unable to get this information, contact your LDAP administrator for assistance.

Additional Considerations

When configuring the PCE to work with LDAP, be aware of the following support:

- PCE uses LDAP protocol version 3 ("v3").
- Supported LDAP distributions include OpenLDAP 2.4 and Active Directory.
- Supported LDAP protocols include LDAP, LDAPS, or LDAP with STARTTLS.

Limitations

- Any user that is created locally will have precedence over an LDAP user of the same name.
   For example, if the LDAP server has a user with a username attribute (such as, cn or uid)
   of johndoe and the default PCE user of the same name is present, the PCE user takes
   precedence. Only the local password will be accepted and on login, the roles mapped to
   the local user will be in effect. To work around this limitation, you must delete the specific
   local user.
- LDAP and SAML single sign-on cannot be used together. An organization can either use LDAP or SAML single sign-on for authenticating external users.

#### **Enable LDAP Authentication**

To enable LDAP authentication:

- 1. Log in to the PCE web console as a Global Organization Owner.
- 2. Choose Access Management > Authentication.
- **3.** In the Authentication Settings screen, locate the LDAP configuration panel and select **Configure**.
- 4. In the LDAP Authentication screen, select Turn On.

### **Configure LDAP Authentication**

Follow these steps to configure LDAP authentication on the PCE. Make sure you have first followed the steps in the "Enable LDAP Authentication" topic.

- **1.** Log in to the PCE as a Global Organization Owner.
- 2. Choose Access Management > Authentication.
- **3.** On the Authentication Settings screen, locate the LDAP configuration panel and click **Configure**.
- 4. In the LDAP Authentication screen, make sure LDAP is enabled.
- 5. Click + Create Server.
- 6. In the LDAP Server Create Screen, enter information to configure LDAP as follows:
  - Name: Enter a friendly name for the LDAP server.
  - IP Address or Hostname: The IP address or hostname of the LDAP server.
  - Protocol: Select one from LDAP, LDAPS (Secure LDAP) or LDAP with STARTTLS.
  - Port: Enter a port number if you are not using a default port. Default ports are 389 for standard LDAP, 636 for LDAPS, and 389 for LDAP with STARTTLS.
  - Anonymous Bind: When using an Open LDAP server, you can use anonymous bind.
     Choose Allow if you want to use anonymous bind. When using Active Directory, the use of Anonymous Bind is not recommended. Choose **Do not Allow** and specify values for Bind DN and Bind Password.
  - Bind DN: Distinguished name (DN) used to bind to the LDAP server. The bind DN is required only when Anonymous Bind is set to **Do not Allow**.
  - Bind Password: Required only when Bind DN is required. When using Anonymous Bind, no bind password is used.
  - Request Timeout Period: This is the number of seconds to wait for a response from the LDAP server. The default is 5 seconds. It can be configured to any value from 1-60 seconds.
  - Trusted CA Bundle: The bundle of certificates including the chain of trust to use when the LDAP server uses either LDAPS or LDAP with STARTTLS.
  - Verify TLS: Enabled by default. This flag specifies whether to verify the server certificate when establishing an SSL connection to the LDAP server. Disabling this is not recommended.
  - User Base DN: Base DN of the LDAP directory to search for users.
  - User Search Filter: Search filter used to guery the LDAP tree for users.
  - User Name Attribute: Attribute on a user object that contains the username. For example, uid, sAMAccountName, userPrincipalName.
  - Full Name Attribute: Attribute of a user object that contains the full name. For example, cn, commonName, displayName.
  - Group Membership Attribute: Attribute of a user object containing group membership information. For example, memberOf, isMemberOf.
- **7.** Click **Test Connection** to verify that the PCE is able to successfully connect to the LDAP server. If Test Connection fails, check your LDAP configuration and retry.

You can enter up to three LDAP server configurations for a PCE. For more information about using multiple LDAP servers, see How the PCE Works with Multiple LDAP Servers [47].

### Map LDAP Groups to User Roles

After you configure the PCE to use LDAP authentication, map PCE user roles to the LDAP server's groups. When a user attempts to log in, the PCE queries the server(s) to find the user. It grants the user permissions based on any PCE user roles associated with the LDAP groups in which the user is a member.

To change user permissions, use one of the following options:

- To change the permissions for a group of users, you can remap the LDAP group to a different PCE role.
- To change the permissions for an individual user, you can move the user to an LDAP group mapped to a different PCE role. You do this action on the LDAP server.

You can also perform these user management activities:

- Add a user to a PCE role: On the PCE, map the PCE role to an LDAP group. Then, on your LDAP server, add the user to that LDAP group.
- Remove a user from a PCE role: Remove the user from the corresponding LDAP group on your LDAP server.

A user can have membership in several roles. In that case, the user has access to all the capabilities available for any of those roles. For example, if a user is a member of both the docs and eng LDAP server groups, and the docs group is mapped to the PCE user role "Ruleset Manager" and the eng group is mapped to "Ruleset Provisioner," the user obtains all permissions assigned to both the "Ruleset Manager" and "Ruleset Provisioner" roles.



### NOTE

The PCE checks LDAP membership information when a user attempts to log in. You do not need to reload the authentication configuration when adding or removing users.

For details about how to map external groups to PCE user roles, see the "Setup for Rolebased Access Control" topic.

### **Modify LDAP Configuration**

Follow these steps to update or delete an LDAP configuration in the PCE. It is assumed you have already followed the steps in Enable LDAP Authentication [44] and Configure LDAP Authentication [45].

- 1. Log in to the PCE as a Global Organization Owner.
- 2. Choose Access Management > Authentication.
- **3.** On the Authentication Settings screen, locate the LDAP configuration panel and click **Configure**.
- 4. In the LDAP Authentication screen, make sure LDAP is enabled.
- **5.** Choose the desired action:
  - To delete a configuration, click the **Remove** icon.
  - To modify a configuration, click the **Edit** icon.

### **Verify LDAP Connectivity**

Follow these steps to test the PCE's connection to the LDAP server(s). It is assumed you have already followed the steps in Enable LDAP Authentication [44] and Configure LDAP Authentication [45].

- 1. Log in to the PCE as a Global Organization Owner.
- 2. Choose Access Management > Authentication.
- **3.** On the Authentication Settings screen, locate the LDAP configuration panel and click **Configure**.
- 4. In the LDAP Authentication screen, make sure LDAP is enabled.
- **5.** The LDAP Authentication screen displays a list of configured LDAP server entries. Click **Test Connection** next to each entry to check whether the configuration is working.

### Secure LDAP with SSL/TLS Certificates

The PCE supports LDAPS and LDAP with STARTTLS. To use the PCE with secure LDAP, add the certificate chain to the local certificate store on the PCE. Follow these steps to configure secure LDAP. It is assumed you have already followed the steps in Enable LDAP Authentication [44] and Configure LDAP Authentication [45].

- 1. Log in to the PCE as a Global Organization Owner.
- 2. Choose Access Management > Authentication.
- **3.** On the Authentication Settings screen, locate the LDAP configuration panel and click **Configure**.
- 4. In the LDAP Authentication screen, make sure LDAP is enabled.
- **5.** Select your LDAP server from the list of configured server entries and click the **Edit** icon.
- 6. Make sure Protocol selected is set to either LDAPS or LDAP with StartTLS.
- **7.** For the Trusted CA bundle, click **Choose File** and upload the chain of certificate authority (CA) certificates for the LDAP server.
- 8. If your LDAP server uses self-signed certificates, uncheck the **Verify TLS** option.



#### NOTE

The use of self-signed certificates for an LDAP server is not recommended. Illumio recommends the use of certificates signed by a valid CA.

### **Authentication Precedence**

PCE local authentication takes precedence over any external systems. When the PCE authenticates a user, it follows this order:

- 1. The PCE attempts local authentication first. If the account is expired or otherwise fails, the PCE does not attempt to log in by using LDAP authentication.
- 2. If the local user does not exist, the PCE attempts LDAP login (if enabled).

## How the PCE Works with Multiple LDAP Servers

You can configure up to three LDAP servers for each PCE. In a PCE supercluster deployment, the Illumio Core platform can support up to three LDAP servers per region.

When attempting to connect to an LDAP server, the PCE follows the order in which the servers were configured. When the request timeout expires, the PCE attempts to connect to the next server in the configuration. The PCE request timeout is configurable. By default, the timeout is 5 seconds.

For example, assume that you configure three LDAP servers in this order: A, B, C. The PCE attempts to connect to the servers in that order: A, B, C. If the PCE fails to connect to A, it attempts to connect to the remaining servers: first B, then C, after the expiration of the connection timeout.

When the PCE successfully connects to an LDAP server, it searches for the user on that server. If the user is found, the PCE stops looking. If the user is found on server A, even if the user also exists on B and C, the PCE will only use A's credentials for that user.

If the PCE successfully connects to an LDAP server but the user is not found, the PCE attempts to connect to the next server in the configured order, and searches for the user again.

You can not dynamically change the order in which the LDAP servers are contacted. To change this priority order, delete the configured entries and add them back in the desired order.

## **Azure AD Single Sign-on**

This topic describes how to configure Azure Active Directory (AD) to provide SSO authentication to the Illumio PCE.



#### TIP

Because you'll configure settings in both the Illumio PCE Web Console and in Azure AD, have both applications open in adjacent browser tabs.

## **Prerequisites**

To perform this configuration, you need the following:

- An Azure AD subscription. If you don't have a subscription, you can get a free account.
- An Illumio single sign-on (SSO) enabled subscription.

## STEP 1: Obtain URLs from the Illumio PCE Web Console

In this step you'll copy and preserve URLs from the Illumio PCE for use in Step 2.

- **1.** Log in to the PCE as a Global Organization Owner.
- 2. Go to Access Management > Authentication.
- 3. On the SAML tile, click Configure.
- **4.** Copy and preserve the following URLs needed to complete the Azure configuration in a later step:



#### TIP

Make sure to replace the x's in the URLs below with the actual values from your implementation.


## **STEP 2: Configure SSO settings in Azure AD**




### NOTE

Only an Azure Application Administrator can configure Azure AD.

- 1. In a different browser tab, log in to Azure AD as an Application Administrator.
- 2. Go to Enterprise applications > All applications.
- **3.** Search for the **Illumio SSO** app and then click the app.

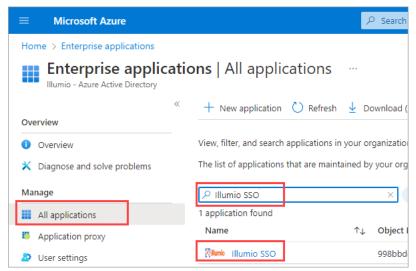

**4.** In the center of the page under **Getting Started**, click **Get started** on the **Set up single sign on** tile.

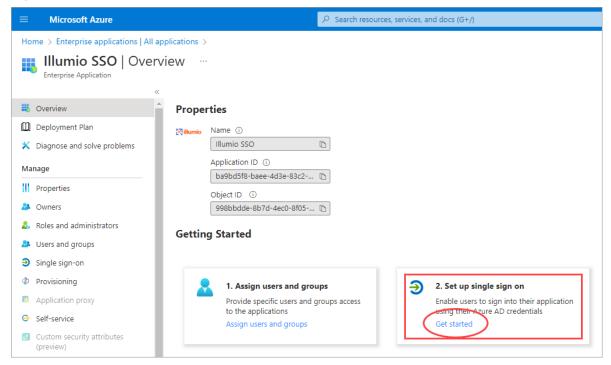


- 5. If prompted to select a single sign-on method, click SAML.
- 6. Configure Basic SAML:


a. On the Set up Single-Sign On with SAML page Basic SAML Configuration tile, click Edit




- **b.** On the **Basic SAML Configuration** panel that opens, populate the fields with the values you copied and preserved.
  - In the Identifier (Entity ID) field, paste the Issuer URL you copied from the Illumio PCE.
  - In the **Reply URL** (Assertion Consumer Service URL field, click **Add reply URL** and then paste the **Assertion Source URL** you copied from the Illumio PCE. **Note:** Your Reply URL must have a subdomain such as www, wd2, wd3, wd3-impl, wd5, wd5-impl. For example, <a href="http://www.my/llumio.com">http://www.my/llumio.com</a> will work but <a href="http://my/llumio.com">http://my/llumio.com</a> won't.
- c. Click Save and close the Basic SAML Configuration panel.
- 7. Click Edit on the Attributes & Claims tile.

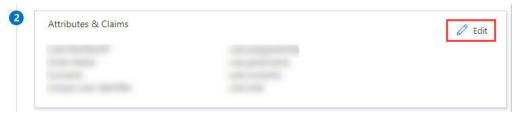


8. Under Required claim, update the Claim name:

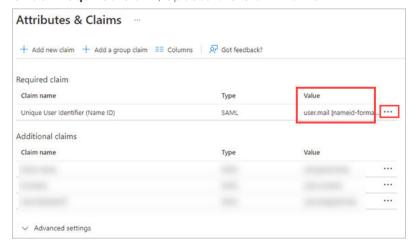

- a. Click the three dots.
- **b.** On the **Manage claim** page, click in the **Source attribute** field and select **user.mail** from the dropdown.
- c. Click Save.
- **9.** Back on the **Attributes & Claims** page, delete **all** of the existing claims in the **Additional claims** section by clicking the three dots for each one and then clicking **Delete**.

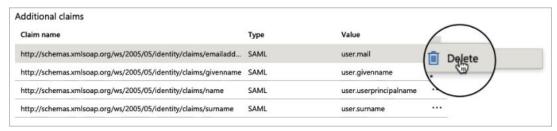

10 Click Add new claim and add three new claims:

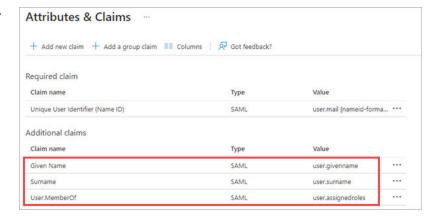

**Given Name** 


**Surname** 

User.MemberOf


# STEP 3: Obtain SAML certificate and URLs from Azure AD

In this step, you'll download a certificate and copy two URLs that you'll later paste into the Illumio PCE SAML setup.

 On the SAML Certificates tile, click Download for the Certificate (Base64) certificate and save the certificate to your computer.

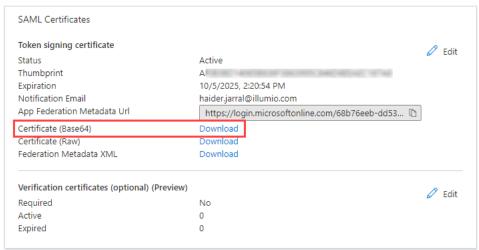


2. On the **Set up Illumio SSO** tile, copy and preserve the following URLs that you'll later paste into the Illumio PCE SAML setup.

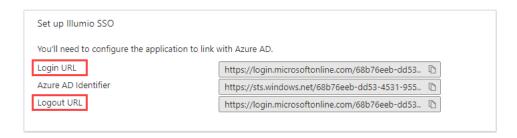

## STEP 3: Create and assign a test user in Azure AD

- 1. In Azure, go to Azure Active Directory.
- 2. In the left pane, click Users and then All users.
- 3. Click + New user.
- 4. In the **User** properties:
  - a. In the Name field, enter a name (Example.Name).
  - **b.** In the **User name** field, enter the user name in the form of an email address (Example.Name@exampledomain.com).
  - c. Select Show password, and then make a note of the value that appears in the Password box.
- 5. Click Create.
- 6. Go to Home > Azure Active Directory.
- 7. Under Overview > Manage, click Enterprise applications > All applications.
- 8. Search for and click the **Illumio SSO** app.

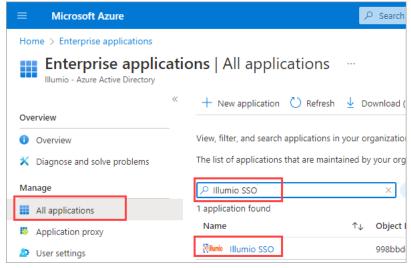

- 9. In the left pane under Manage, click Users and Groups.
- 10 Click + Add user/group.
- 11. On the Add Assignment page, click Users and groups.
- **12.** In the **Users and groups** panel that opens, click the user you created in a previous step (Example.Name).
- 13. Click Select.
- **14.** On the **Add Assignment** page under **Select a role**, click one of the roles you created in a previous step.
- 15. Click Assign.

# STEP 4: Configure SAML SSO settings in the Illumio PCE

In this procedure you'll paste the following information that you copied and preserved from Azure:


- Certificate (Base64)
- Azure Login URL
- Logout URL
- 1. In the Illumio PCE Web Console, go to Access Management > Authentication.
- 2. On the **SAML** tile, click **Configure**.
- 3. Click Edit.
- **4.** In the **Information from Identity Destination** section, enter the following information that you obtained from Azure AD:
  - **SAML Identity Destination Certificate**: Open the certificate that you downloaded and then copy and paste the contents.
  - Remote Login URL: Paste the Login URL you copied from Azure AD.
  - Logout Landing URL: Paste the Logout URL you copied from Azure AD.
- 5. In the **Information for Identity Destination** section:
  - a. Choose an authentication method:
    - Unspecified uses the IdP default authentication mechanism.
    - Password Protected Transport requires the user to log in with a password in a protected session.
  - **b.** If you want to require users to re-enter login credentials to access Illumio (even if the session is still valid), select **Force Re-authentication**. This allows users to log in to the PCE using login credentials different from their default computer login credentials.
- 6. Click Save

## **STEP 5: Create App Roles in Azure AD**

In this step you'll create app roles in Azure AD that you'll map to roles in the Illumio PCE Web Console.

For reference in this step, here's a list of the Global Roles available in the PCE Web Console:

- Global Organization Owner
- Global Administrator
- Global Viewer
- Globally Policy Object Provisioner
- In Azure AD, go to Users and Groups and then click application registration.

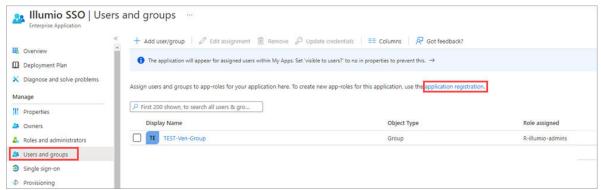

- 2. Create the roles you want by clicking **+ Create app role** and entering the required information for each role:
  - **Display name:** For example, enter one of the Global Roles that appear in the PCE Web Console.
  - Value: This must match the name you'll enter in the Add External Groups dialog box.
  - **Description**: The description will appear as help text in the app assignment and consent experiences.

- 3. Click **Apply** for each role that you create.
- 4. Delete the default app role msiam\_access.

Note: You first need to disable the default app role before you can delete it.

- a. Click mslam\_access to open the Edit app role panel.
- b. Deselect Do you want to enable the app role?
- c. Click Apply. The side panel closes.
- d. Click **mslam\_access** again to to open the **Edit app role** panel again.
- e. Click Delete.

When you're done creating roles in Azure AD, the **App roles** section should look similar to this:

pp roles are custom roles s permissions during auth	s to assign permissions to users or ap norization.	ps. The application defines and	publishes the app	roles and interpre
low do I assign App role	es			
Display name	Description	Allowed member types	Value	ID
Global Organization O	Global Organization Owner	Users/Groups	G00	309c15
Global Administrator	Global Administrator	Users/Groups	GA	f6473e
Global Viewer	Global Viewer	Users/Groups	GV	cb6778
Clabel Delley Object D	Global Policy Object Provisioner	Users/Groups	GPOP	d07b17

## STEP 6: Assign users and groups to app roles in Azure AD

In this step, you'll assign users and groups to the app roles you created.

- 1. In Azure AD, go to **Users and groups**.
- 2. Select the Illumio SSO app.
- **3.** Click **Remove** to remove the current app assignments.
- **4.** Click **Yes** to confirm removal.
- 5. Click Add user/group.
- **6.** On the **Add Assignment** page, assign desired role(s) to users or groups:
  - a. Under User and groups, click None Selected.
  - **b.** In the **Users and groups** panel that opens, search for your desired user/group, click to select it, and then click **Select** at the bottom of the panel.
  - c. Back on the Add Assignment page, under Select a role\*, click None Selected.
  - **d.** In the **Select a role** panel that opens, find and click the role you want to assign, and then click **Select** at the bottom of the panel.
  - e. Back on the Add Assignment page, click Assign at the bottom of the page.
  - f. Repeat these sub-steps for each user and/or to which you want to assign app roles.

## STEP 7: Add External Groups and assign roles in the PCE Web Console

In this step, you'll add external groups in the PCE Web Console and assign them the relevant global or scoped roles in Illumio RBAC.



### TIP

Alternatively, you can add individual users by going to the **External Users** tab and following the onscreen prompts.


- 1. On the PCE Web Console, go to Access Management > External Groups.
- 2. Click Add.
- 3. In the Add External Group dialog box:
  - · Enter a Name.
  - · Enter an External Group.




#### **IMPORTANT**


This must match the **Value** that you specified for the app role.

- · Click Add.
- 4. Repeat for additional groups.

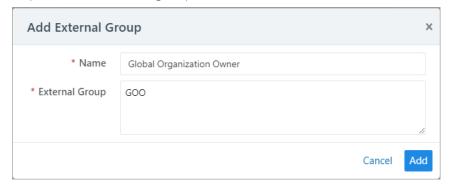

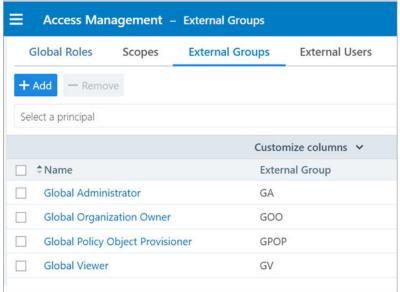


- 5. Click to open a group you created in the above step.
- 6. Click Add Role > Add Global Role or Add Scoped Role.
- 7. In the Access Wizard, select the appropriate Role and then click Grant Access.
- 8. Repeat for additional groups.

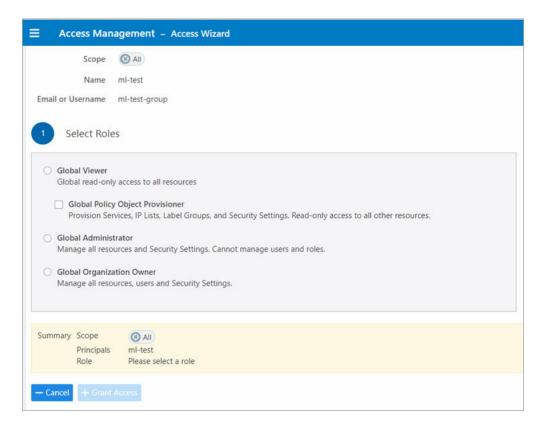

## STEP 8: Turn on SAML authentication in the PCE Web Console


- 1. In the PCE Web Console, go to Access Management > Authentication.
- 2. On the SAML tile, click Configure.
- 3. On the SAML page, click Turn On and then click Confirm.

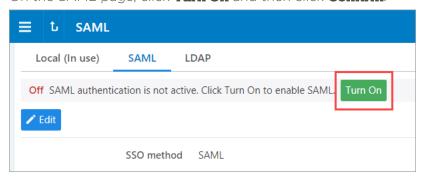

## STEP 9: Test SSO

Perform this procedure to test the SSO authentication you configured in the previous steps.

- 1. In Azure AD, go to Single sign-on.
- 2. Click Test this application.
- 3. In the panel that opens, select a way to sign in and then click **Test sign in**.

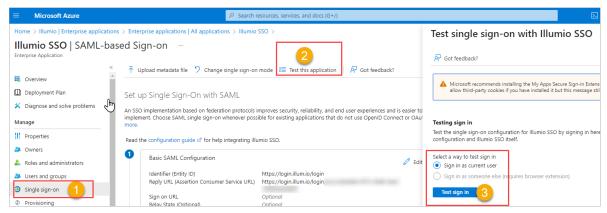

4. If the test is successful, the PCE will log you in to the **Welcome to Illumio** screen.

## **Active Directory Single Sign-on**

This section describes how to configure Microsoft Active Directory Federation Services (AD FS) 3.0 for Single Sign-on (SSO) 2.0 authentication with the PCE.

## **Overview of AD FS SSO Configuration**

To enable AD FS for the PCE, the PCE needs three fields returned as claims from:

- NameID
- Surname
- Given Name


There are two ways for AD FS to produce the NamelD claim for an SSO user. The first uses the email field in an Active Directory user account for the NamelD.

The second way to return a NameID of an Active Directory user is to use the User Principal Name (UPN). Each user created in Active Directory has an extension to their username that's ADUserName@yourADDomanName. For example, a user named "test" in an Active Directory domain called "testing.com" would have a UPN of test@testing.com.


### **Configure AD Users to Use Different UPN Suffixes**

To configure different UPN suffix as the source for NameID:


 Add a UPN suffix. On your system under Server Manager Tools, click Active Directory Domains and Trusts.

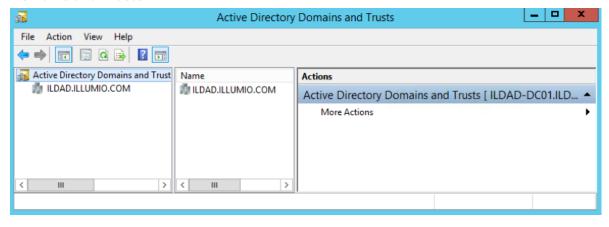

2. From the left side of the window, right-click Active Directory Domains and Trusts, and select **Properties**. In this dialog, you can create new suffixes for Active Directory usernames.

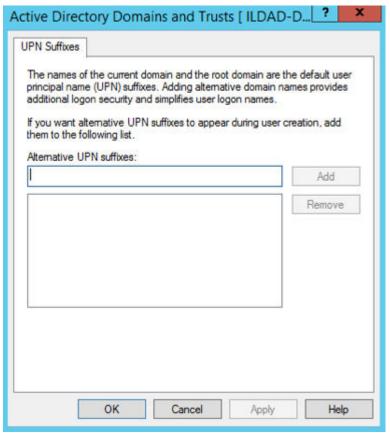


3. Create a suffix that matches the external namespace you'll be using and click Add.

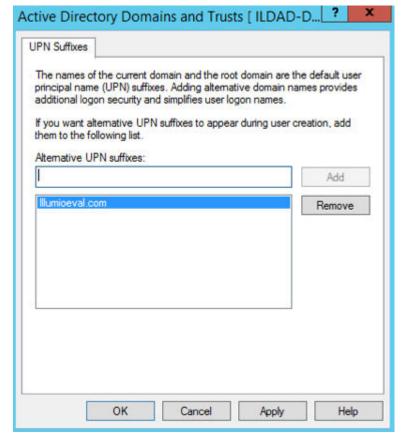

You can now assign an Active Directory user your custom UPN for the SAML response.

**4.** You can add multiple UPNs if needed. As shown below, you can select the UPN created in the previous steps.

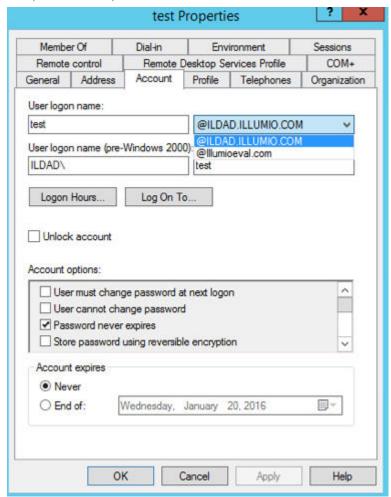

Your UPN configuration is set up and you can begin configuring AD FS for SSO with the PCE.

# **Initial AD FS SSO Configuration**

This task explains how to perform the initial configuration of AD FS to be your SSO IdP for Illumio Core.

To configure AD FS:


1. Open Microsoft Server Manager and click the notification icon.




2. Click the "Configure the federation service on this server" link.




**3.** Select the "Create the first federation server in a federation server farm" option and click **Next**.

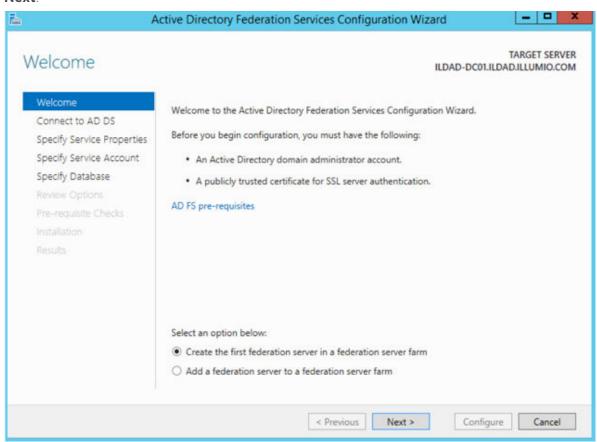


4. Specify a domain admin account for AD FS configuration.

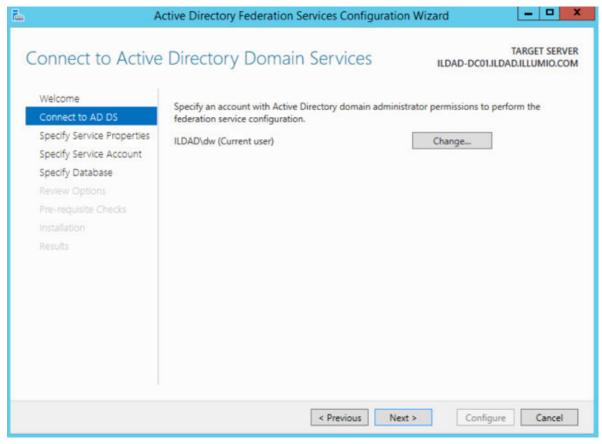


5. Select or import a certificate. This certificate can be a self-signed certificate.

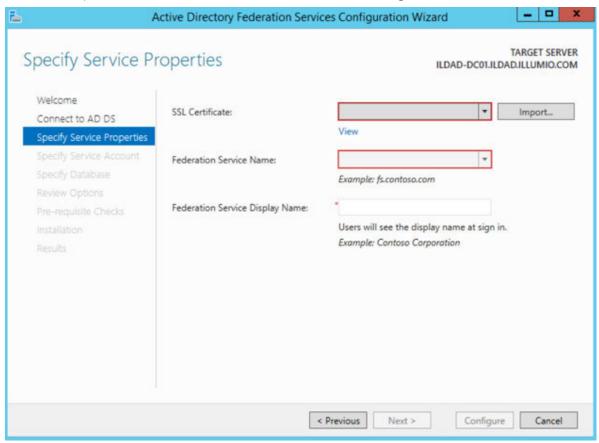


**6.** Specify your Federated Service Name, enter a display name for this instance of AD FS, and click **Next**.

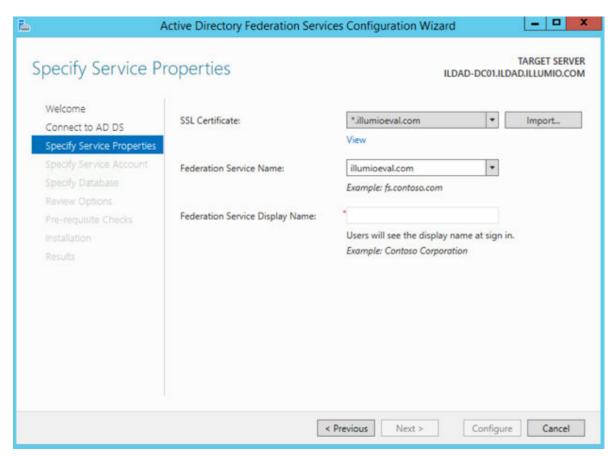


7. Specify your service account and click Next.

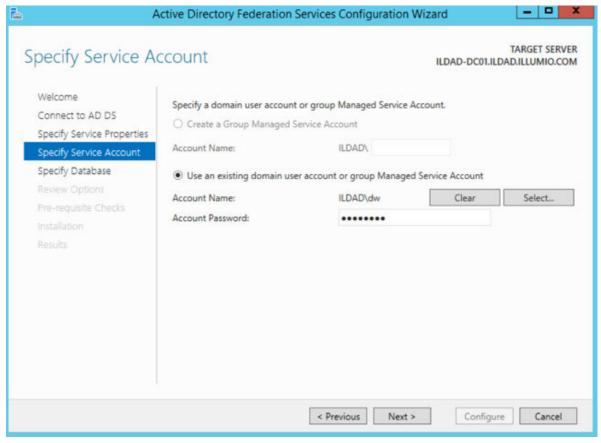


**8.** Select "Create a database on this server using Windows Internal Database" or choose the SQL server option, and click **Next**.

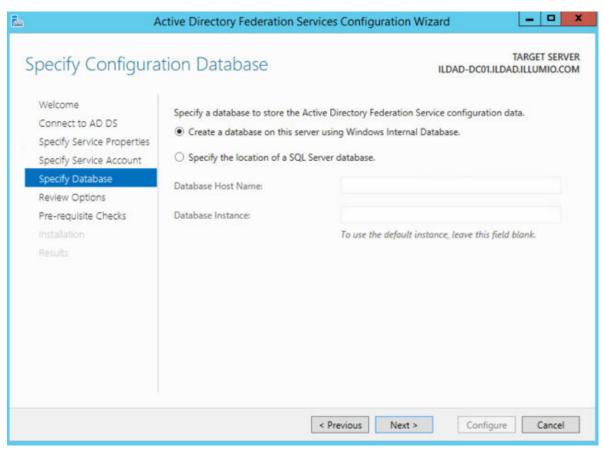

9. Review your selected options and click Next.

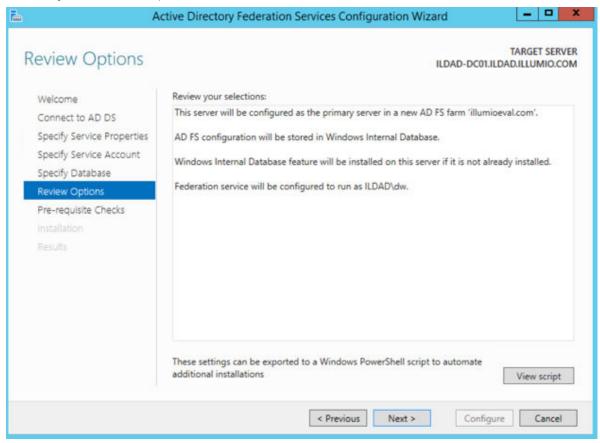

10 Click Configure to finish the basic configuration of AD FS.

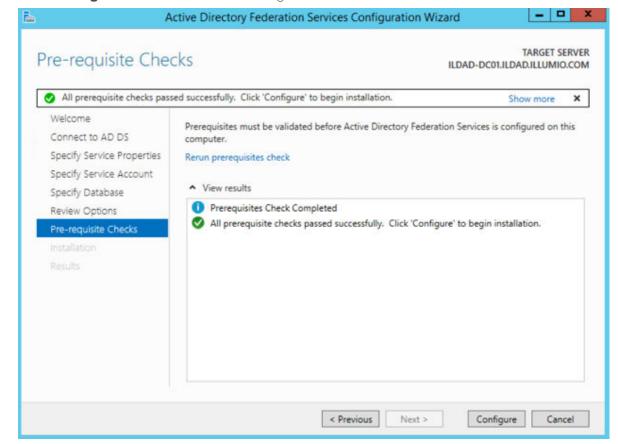


11. In the results screen, click Close.

AD FS is now installed with the basic configuration on this host.


## **Create a Relying Party Trust**

To start configuring AD FS for SSO with the PCE, you need to create a Relying Party Trust for your Illumio PCE.


- 1. From Server Manager/Tools, open the AD FS Manager.
- 2. From the left panel, choose Relying Party Trusts > Add Relying Party Trust.

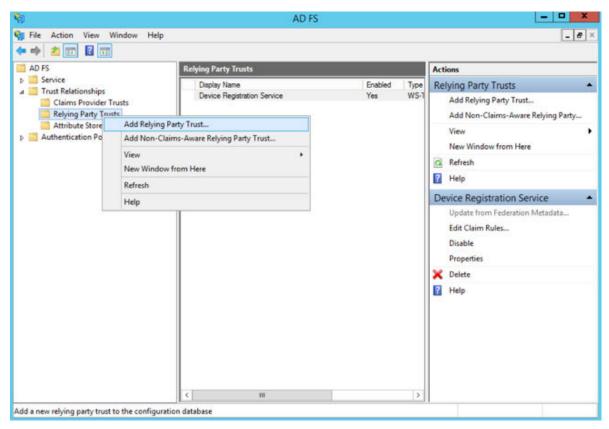


The Add Relying Party Trust Wizard appears.

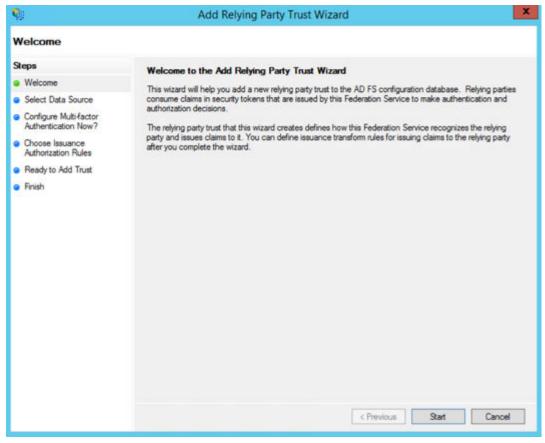


- 3. Click Start.
- 4. Select the "Enter data about the relying party manually" option and click Next.

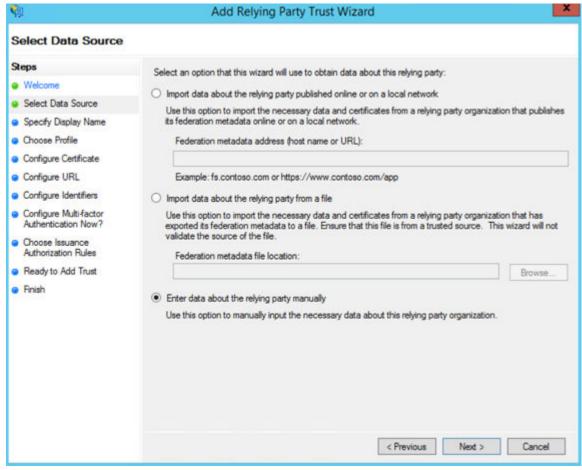

5. Name your Relying Party Trust and click Next.

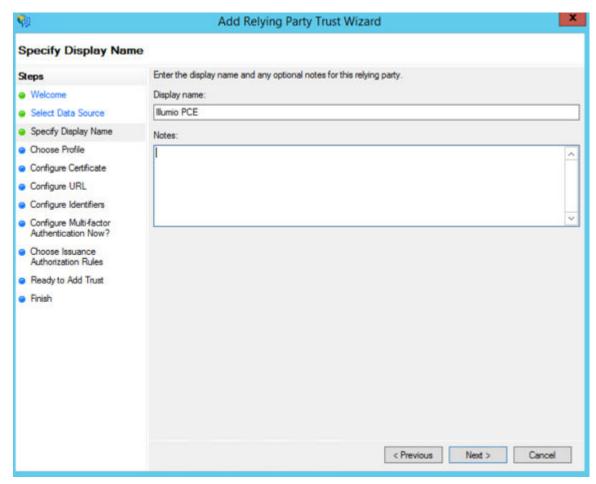

**6.** Select "ADFS profile" and click **Next**.

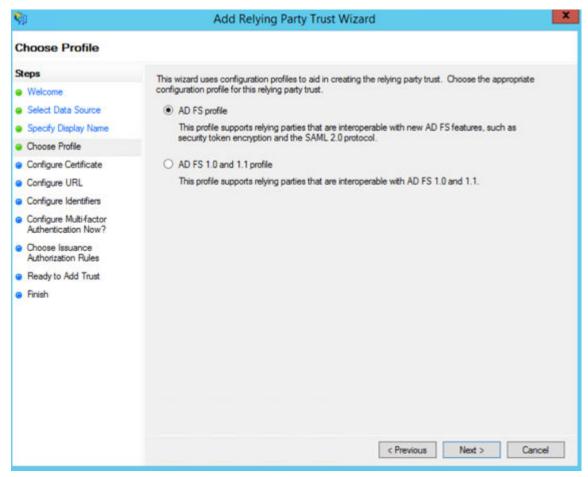


7. When you have a separate certificate for token encryption, browse to, select it, and click **Next**.




## NOTE


To use the standard AD FS certificate (created during AD FS installation) for token signing, don't select anything in this step and click **Next**.

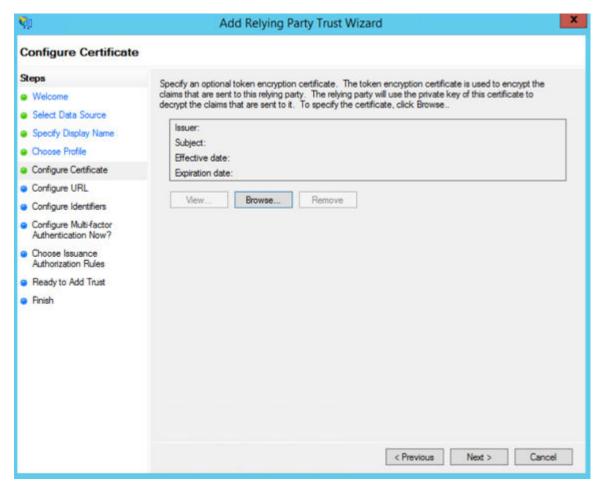


**8.** Select "Enable support for the SAML 2.0 WebSSO protocol." In the Relying party SAML 2.0 SSO service URL field, add your "Assertion Consumer URL" (obtained from the PCE web console).

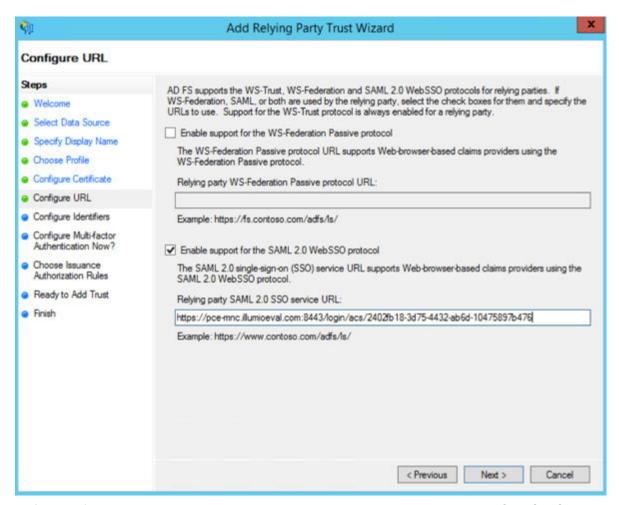


To locate the "Assertion Consumer URL," go to **Access Management > Authentication > Information for Identity Provider** in the PCE web console:

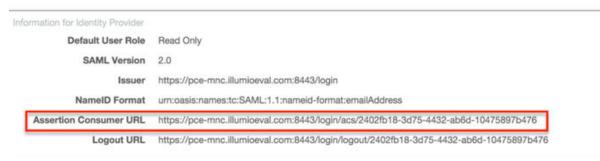


9. On the Configure Identifiers page, use the same URL for the Relying party trust identifier, without the /acs/<randomNumbers>. For example: https://pce-mnc.illumioev-al.com:8443/login. Click **Next**.

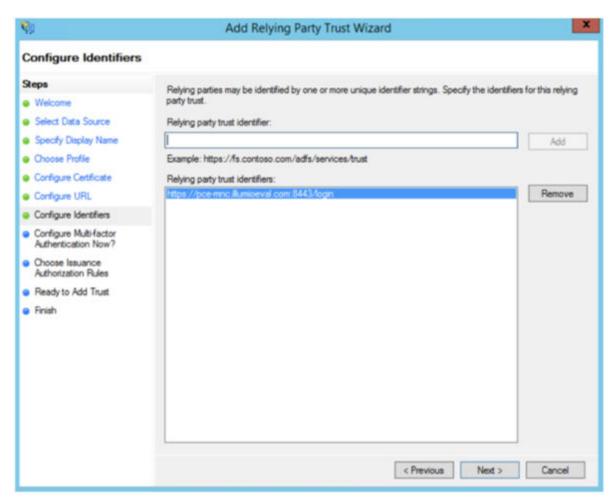


10 Select the "I do not want to configure multi-factor authentication..." and click Next.

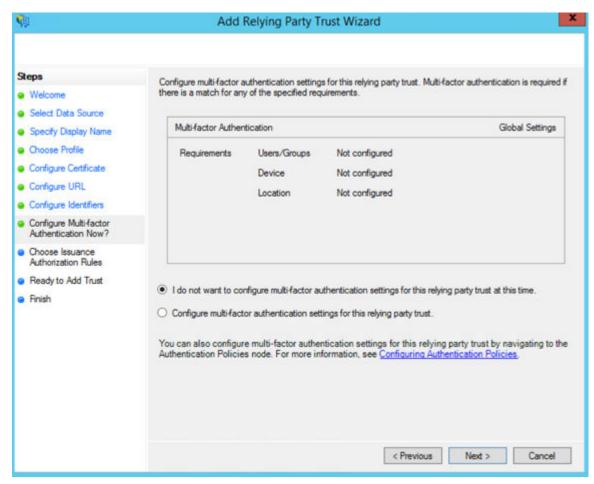


11. Select "Permit all users to access this relying party" and click Next.

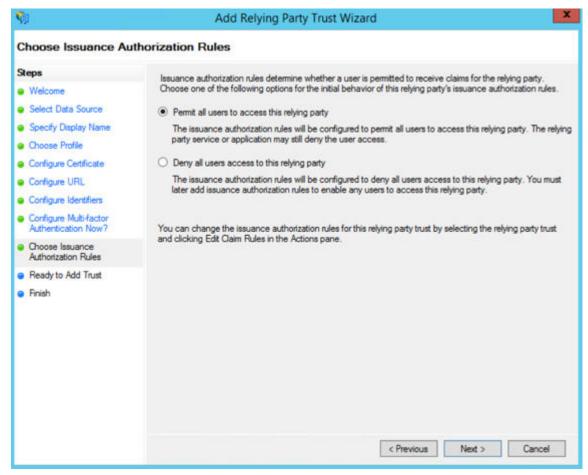

12. On the Ready to Add Trust page, click Next.

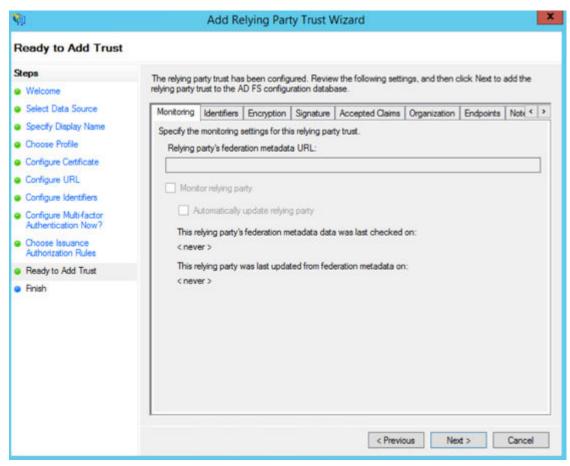


13. Leave the Open the Edit Claim Rules checkbox selected and click Close.

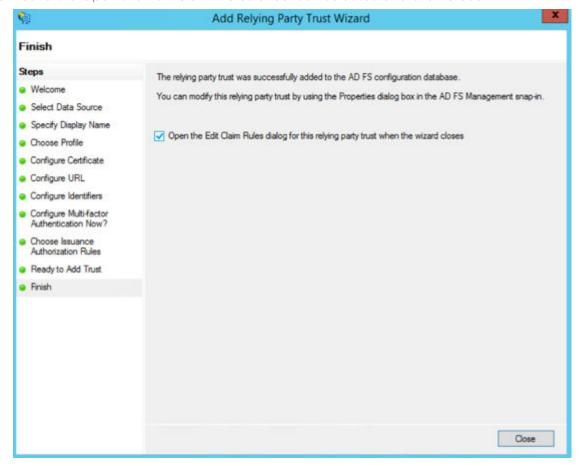


## **Create Claim Rules**

You need to create claim rules to enable proper communication between AD FS and the PCE.


1. In the Edit Claim Rules dialog, click Add Rule.

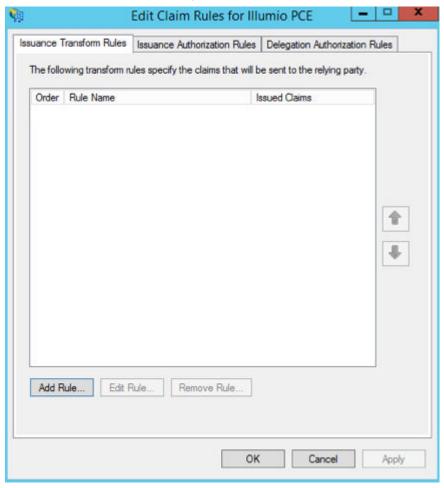


2. Under Select Rule Template, select "Send LDAP Attributes as Claims" and click Next.

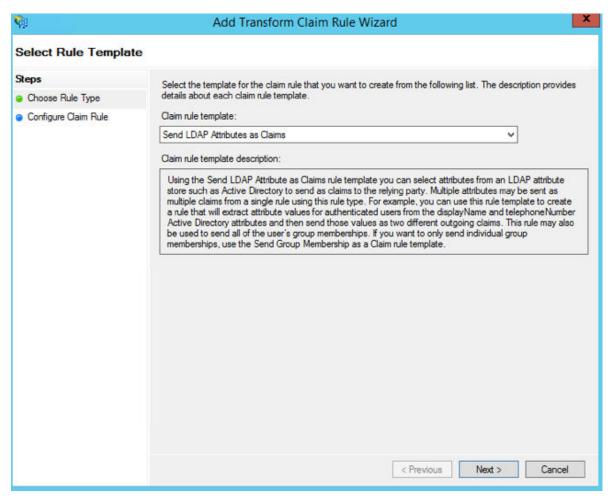


**3.** Name the Claim rule "Illumio Attributes" and select **Active Directory** as the Attribute store. Under the first attribute, select "User-Principal-Name" and "E-Mail Address" as the outgoing. Select "Surname" and type the custom field name of "User.LastName" in the outgoing field. Repeat the values for "Given-Name" and "User.FirstName" and click **Finish**.

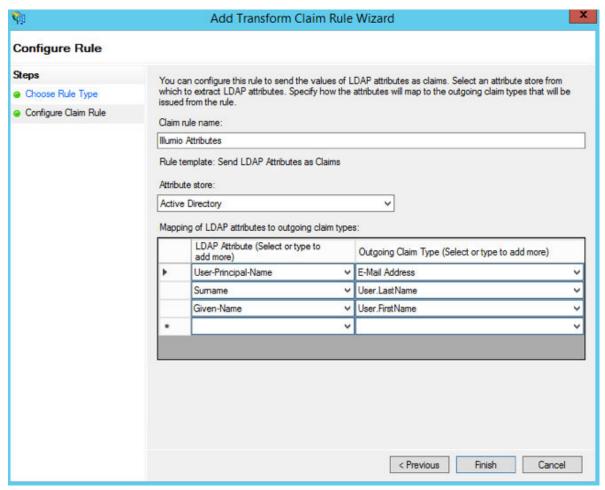


**4.** In the Edit Claim Rules dialog with your new rule added, click **Add Rule** to add the final rule.

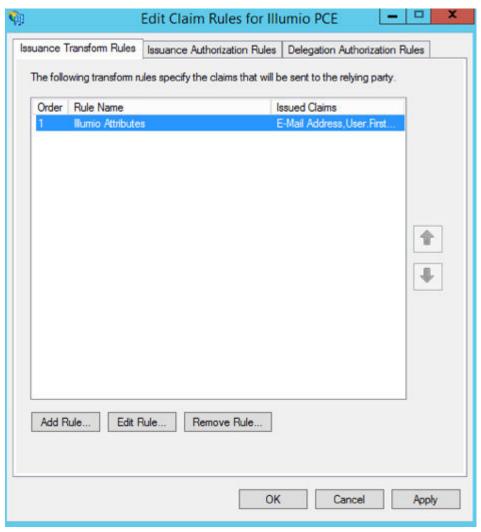


5. Under the Claim Rule Template, select "Transform and Incoming Claim" and click Next.

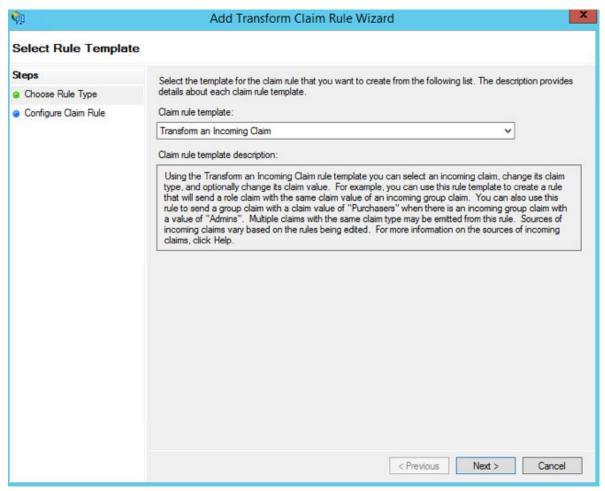

**6.** Name the rule "Email to NameID Transform" and change the incoming claim type to "E-Mail Address." Set the Outgoing claim type to "Name ID" and the Outgoing name ID format to "Email" and click **Finish**.

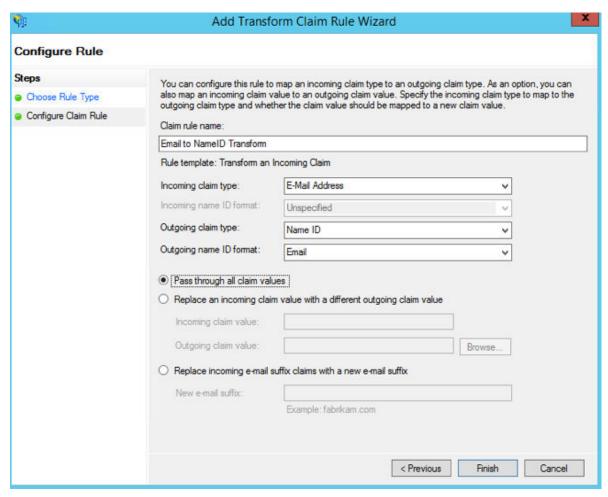


The Edit Claim Rules window opens.

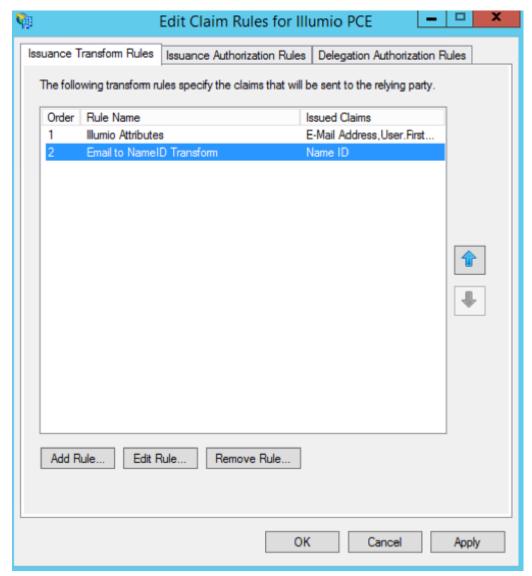


- 7. (Windows 2016 and Windows 2019) Skip to step 12.

  The Edit Claim Rules window has three tabs. You have already filled out the first tab. The other two tabs are not available in Windows 2016 or Windows 2019. Therefore, skip steps 8 11.
- 8. Select the Issuance Authorization Rules tab.
- **9.** To allow all your Active Directory Users to access the PCE, leave the "Permit Access to All Users" as is. Otherwise, you should restrict access to a single group or groups of users.

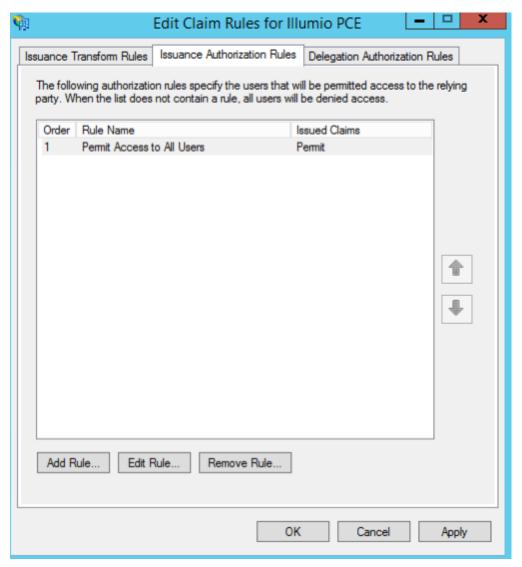


10 Select "Permit or Deny Users Based on an Incoming Claim" and click Next.

.

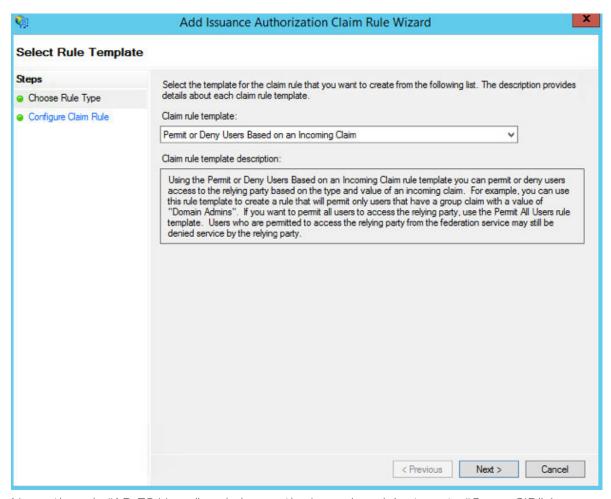


11. Name the rule "AD FS Users" and change the Incoming claim type to "Group SID" (you might have to scroll to find it). In Incoming claim value, browse to the group of users you want to give access. Make sure "Permit access" is selected and click **Finish**.

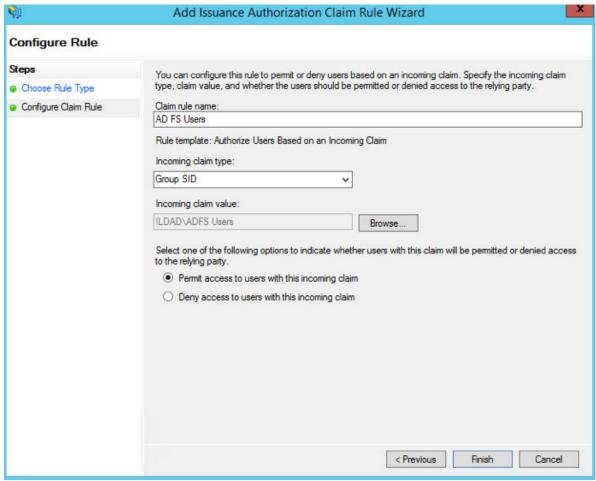

**12.** If you are using RBAC with groups, you need to create a Goup Claim Rule.

To add groups to AD FS claim rule configuration, click **Edit Rule**. Add the requirement for "LDAP Attribute: memberOf" by selecting the Outgoing Claim Type as "User.MemberOf." Click **OK**.

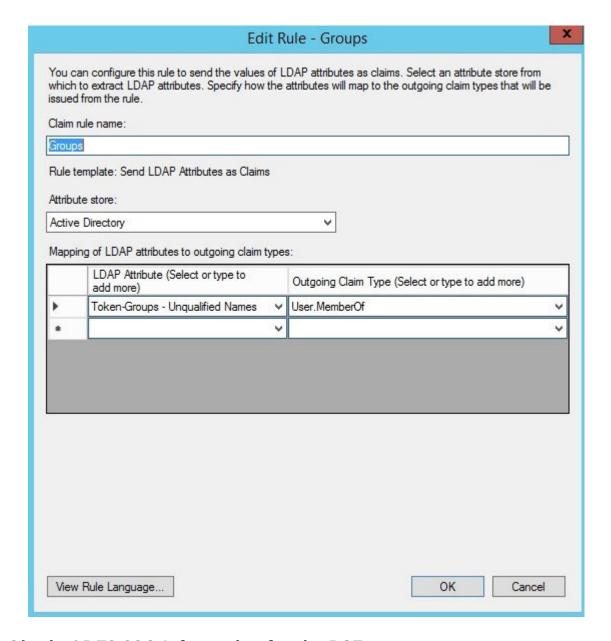


## **Obtain ADFS SSO Information for the PCE**

Before you can configure the PCE to use AD FS for SSO, obtain the following information from your AD FS configuration:

- x.509 certificate supplied by ADFS
- Remote Login URL
- Logout Landing URL

To obtain the AD FS SSO information for the PCE:

- 1. To find the certificate in your AD FS configuration, log into the AD FS server and open the management console.
- 2. Browse to the certificates and export the Token-Signing certificate.
- **3.** Right-click the certificate and select **View Certificate**.
- 4. Select the **Details** tab.
- 5. Click Copy to File.

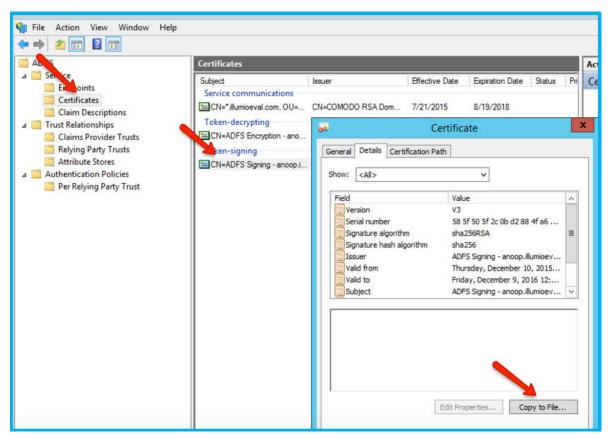

- 6. When the Certificate Export Wizard launches, click Next.
- 7. Verify that the "No do not export the private key" option is selected and click Next.
- 8. Select Base 64 encoded binary X.509 (.cer) and click Next.
- 9. Select where you want to save the file, name the file, and click Next.
- 10 Click Finish.
- 11. After exporting the certificate to a file, open the file with a text editor. Copy and paste the contents of the exported x.509 certificate, including the BEGIN CERTIFICATE and END CERTIFICATE delimiters in to the SAML Identity Provider Certificate field.
- 12. To find the Remote Login URL (which AD FS calls "Sign-On URL"), download and open the following metadata file from your AD FS server by navigating to https://server.mydomain/FederationMetadata/2007-06/FederationMetadata.xml and search for SingleSignOnService.

format:persistent</NameIDFormat><NameIDFormat>urn:oasis:names:tc:SAML:2.0:nameid
-format:transient</NameIDFormat><SingleSignOnService</pre>

Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-Redirect"

Location="https://\_\_\_.illumio\_\_\_.com/adfs/ls/"/><SingleSignOnService

Binding="urn:oasis:names:tc:SAML:2.0:bindings:HTTP-POST"

Location="https://anoop.illumioeval.com/adfs/ls/"/><Attribute

Name="http://schemas.xmlsoap.org/ws/2005/05/identity/claims/emailaddress"

**13.** To find the **Logout Landing URL** for the PCE, you can use the login URL of the PCE (preferred):

https://<myPCENameAndPort>/login

Or, a generic logout URL of AD FS:

https://<URLToMyADFSServer>/adfs/ls/?wa=wsignout1.0

You are now ready to configure the PCE to use AD FS for SSO.

## Configure the PCE for AD FS SSO

Before you configure the PCE to use Microsoft AD FS for SSO, make sure you have the following information provided by your AD FS, which you configure in the PCE web console:

- x.509 certificate supplied by ADFS
- · Remote Login URL
- Logout Landing URL

For more information, see Obtain ADFS SSO Information for the PCE [85].



#### NOTE

When SSO is configured in Illumio Core and for the IdP, the preferences in Illumio Core are used. When SSO is not configured in Illumio Core, the default IdP settings are used.

To configure the PCE for AD FS:

- 1. From the PCE web console menu, choose Access Management > Authentication.
- 2. On the **SAML** tile, click **Configure**.
- 3. On the SAML page, click Edit.
- **4.** In the Information From Identity Provider section, enter the following information:

- SAML Identity Provider Certificate
- Remote Login URL
- Logout Landing URL
- **5.** Select the authentication method from the drop-down list:
  - **Unspecified:** Uses the IdP default authentication mechanism.
  - Password Protected Transport: Requires the user to log in with a password using a protected session; select this option and check the Force Re-authorization checkbox to force user re-authorization.
- **6.** To require users to re-enter their login information to access Illumio (even if the session is still valid), check the Force Re-authentication checkbox. This allows users to log into the PCE using a different login than their default computer login and is disabled by default.



#### NOTE

You must select "Password Protected Transport" as the authentication method and check the Force Re-authentication checkbox to force users to re-authenticate.

- 7. Click Save.
- **8.** Click **Turn On** to enable SAML, and then click **Confirm**. Your PCE is now configured to use AD FS for SSO authentication.

## **Okta Single Sign-on**

This section explains how to configure SSO for user authentication with the PCE using Okta as your IdP.

#### **Prerequisite for Okta SSO**

Before you begin, make sure you have the following information from your Okta account:

- x.509 certificate
- Remote Login URL
- Logout Landing URL



#### NOTE

Your PCE user account must have Owner or Admin privileges to perform this task.

## Configure the PCE for Okta SSO

- 1. From the PCE web console menu, choose Access Management > Authentication.
- 2. On the Authentication Settings screen, locate the SAML configuration panel and click **Configure**.
- **3.** Enter the following information:
  - **SAML Identity Provider Certificate:** Paste your Okta x.509 certificate (in PEM text format):


- Remote Login URL: Enter the Okta Remote Login URL.
- Logout Landing URL: Enter the Okta Logout Landing URL.
- **4.** In the Information for Identity Provider section, choose the Access Level for the users who will use Okta to authenticate with the PCE. When you select No Access, SSO users from your Okta account will have to be added manually before they can log into the PCE. (For more information on PCE user permissions, see Role-based Access Control [16].)
- 5. In the Information for Identity Provider section, make note of the following fields:
  - Issuer
  - Assertion Consumer URL
- **6.** Select the authentication method from the drop-down list:
  - **Unspecified:** Uses the IdP default authentication mechanism.
  - Password Protected Transport: Requires the user to log in with a password using a protected session.
- 7. To require users to re-enter their login information to access Illumio (even if the session is still valid), check the Force Re-authentication checkbox. This allows users to log into the PCE using a different login than their default computer login and is disabled by default.



#### NOTE

When SSO is configured both in Illumio Core and for the IdP, the preferences in Illumio Core are used. When SSO is not configured in Illumio Core, the default IdP settings are used.

- 8. Click Save.
- 9. Log into your Okta account.
- 10 Select the Illumio Core app, select the General tab, and click Edit.
- **11.** Enter the values you copied from the Information for Identity Provider section of the PCE SSO Configuration page.

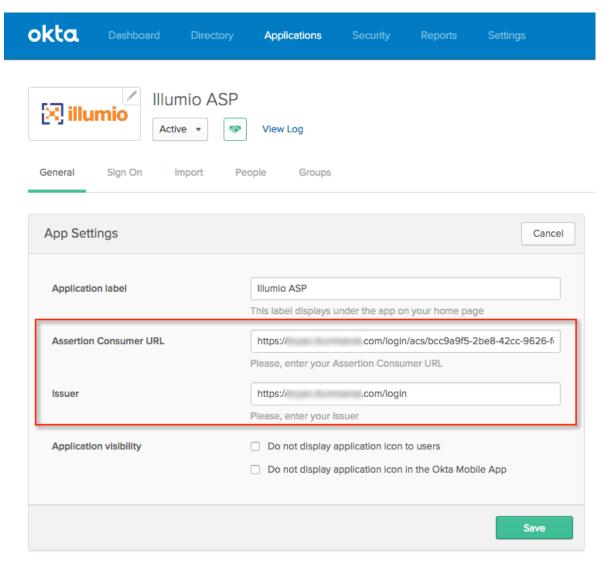

#### 12. Click Save.

Your PCE is now configured to use Okta SSO for authenticating users with the PCE.

# **Manage PCE Nodes and Clusters**

This section describes how to manage PCE infrastructure, which is made up of core and data nodes organized into one or more clusters.

## **Manage Data and Disk Capacity**

The amount of data collected and stored by the PCE can be large. Events, Explorer, and the internal syslog all generate data that is stored in PCE databases and log files. When the amount of stored data is not managed carefully, disks can become overfull. This occurrence can cause a variety of symptoms: inability to take backups, failing API calls, and general PCE functionality issues. Even when these issues do not occur, a large amount of stored data creates larger database backups, and it takes longer to back up and restore the database.

To successfully manage these issues, consider the following recommendations:

- Identify: Know your organization's policies, backup strategies, and monitoring strategies.
- **Detect:** Monitor ongoing disk usage.
- Respond: Know how to troubleshoot and fix issues related to data storage.
- RecoverL Set up your PCE deployment to reduce disk usage.

## **Identify Data Management Strategies**

Identify your organization's policies and strategies related to data storage and retention, backups, and monitoring. This knowledge forms the basis for any ongoing data management activities. You'll need the following information:

- **Records retention policy:** How many days of events data must be available at all times? When your policy requires fewer days of events data than the PCE's default, you can decrease the PCE's events retention period, which helps avoid filling up disk space.
- **System backup policy:** Are full backups always necessary, or would weekly full backups be sufficient, supplemented by smaller daily backups that do not include events data?
- **Disk usage trends:** How fast is data usage growing in your Illumio Core deployment? What is the additional data usage each day?
- **Monitoring tools:** What disk monitoring tools are in place? If none, is there a useful tool that could be added? Do the monitoring tools integrate with the PCE Health API?

## **Detect Disk Usage**

Monitor disk usage to be sure you are aware of status and trends, especially any unusual activity, such as sudden spikes or other anomalies.

- Watch the PCE Health page. For information, see PCE Health Monitoring [138].
  - · Check the Disk Usage figures.
  - When disk usage is too high, the PCE displays warnings, such as "Disk Critical."
  - You can call the page's underlying PCE Health API with external monitoring tools.
- Check the system health messages that are sent to syslog from each node in the cluster.
- Use the command illumio-pce-ctl events-db disk-usage-show to get the number of events in the database, the amount of disk used by the Events database, and the average number of events per day. For more information, see View Events Using PCE Command Line in Endpoint Installation and Usage Guide.
- Run your own disk monitoring tools or use standard Linux commands, such as df and du.

#### **Respond to Disk Capacity Issues**

You can prevent many disk capacity issues by deploying the PCE with sufficient resources. Be sure your disk meets the recommendations in PCE Capacity Planning in PCE Installation and Upgrade Guide.

When you are running out of storage space, use Linux tools to find the parts of the disk that are being utilized heavily. Then, depending on your findings, try some of these techniques:

- Are the PCE log files taking up disk space? Look for extra, older files you can move or delete from the log directory (usually /var/logs/illumio-pce).
- Are other system logs taking too much space? Rotate and compress them, or delete them.
- After a PCE successfully joins a Supercluster, a directory called postgresql.bak is sometimes left behind in the <postgresql directory>, especially on the database master node. You can delete the directory postgresql.bak and all its contents. This file directory is kept in case the cluster-join command fails and you need to recover, but once the cluster-join is complete, and your disk space needs become the higher priority, the directory can be removed.

- Delete any large or unnecessary files in the /tmp directory; for example, core files.
- Remove copies of backups stored on PCE nodes. In general, don't use the PCE as a place to store backup files.
- Reduce the retention period for events data, making sure it is still acceptable according to your organization's record retention policy. The PCE automatically deletes excess older records from the database. The default data retention period for events is 30 days. You can decrease the retention period to as little as 1 day. However, exercise caution; balance the need to minimize disk usage against your company's data retention policies and your need to retain data for analysis. For information about how to change the data retention period, see Configure Events Settings in PCE Web Console in Events Administration Guide.
- The PCE provides short-term storage of events data. Consider forwarding events data to Splunk or other SIEM software for long-term storage in accordance with your organization's data retention policies.
- Consider excluding events from most database dumps. Use the option --no-include-events for the illumio-pce-db-management dump command. When your organization's policies permit it, perform a full database dump (which includes events data) once during each events data retention period.

## **Recover Disk Usage**

- Extend the disk: When the current disk or partition is smaller than the recommended size, increase the partition size. The file runtime\_env.yml can be configured with different local partition settings.
- Add a partition or slice for logs or backups: Copy the old files in /var/logs/illumio-pce to a new disk. Mount the new disk to the same location on the PCE with the same permissions as the original disk.
- Create a new disk or partition: Mount a new disk or partition to a suitable location for saving backup files.
- Move the Explorer database to its own disk: Mount a new dedicated disk and move files from the existing traffic datastore to this dedicated disk. For information, see How to Move an Existing Explorer Database to a Separate Disk in the Illumio Knowledge Base (login required).

## **Cluster Nodes and Command-Line Operations**

The PCE control interface commands are restricted to the type of node they can be executed on. For example, the command to set a cluster's runlevel can be run on any core or data node. Database-specific commands must only be run on specific data nodes. The following tables list the command-line operations you can perform and the specific nodes the commands must be run on.

#### **PCE Control Commands**

The following table shows commands you can use to control various aspects of PCE behavior. Some of the commands affect a single node and others affect the entire PCE cluster. The commands have the following general syntax:

# sudo -u ilo-pce illumio-pce-ctl sub-command --option

Sub-Command	Description	Run on Node
Single-node commands		
start	Start PCE software on a single node.	Any
startrunlevel n	Start PCE software at a specified runlevel on a single node.	
stop	Stop PCE software on a single node.	Any
restart	Restart the PCE software on a single node.	Any
status	Show status of the PCE software on a single node.	Any
check-env	Check the runtime_env.yml file on a single node.	Any
service-discovery- status	Get status of service-discovery services on a single node.	Any
check-consul-status	Get status of the consul service on a single node.	Any
Cluster-wide commands		
set-runlevel	Set the software runlevel for the PCE software on all nodes.	Any
get-runlevel	Get the runlevel of the PCE software on all nodes.	Any
cluster-status	Get the status of the PCE software across the cluster.	Any
cluster-stop	Shut down the cluster.	An
cluster-restart	Restart the cluster.	Any
cluster-leave	Force the current node or the node defined by the IP address to be removed from the cluster.	Any
cluster-members	Show all cluster members.	Any

## **Database Commands**

The following table shows commands you can use to control various aspects of PCE database behavior. The commands have the following general syntax:

# sudo -u ilo-pce illumio-pce-db-management sub-command --option

Sub-Command	Description	Run on Node
setup	Begin initial setup of the PCE database.	Any
migrate	Migrate the database to the latest schema.	Any
dump	Dump the database to a file.	Data node where agent_traffic_re- dis_server service is run- ning.

Sub-Command	Description	Run on Node
restore	Restore the database from a file.	Any data node
create-domain	Create the first organization and user in the system.	Any data node
show-master	Show which node is the primary database.	Any
show-replication- info	Show replication lag between the replica and primary databases.	Any

## **Start and Stop Nodes and Cluster**

This section describes how to stop and start the PCE.

### Start Individual PCE Node

This command starts the node where it is run:

\$ sudo -u ilo-pce illumio-pce-ctl start

## **Stop a PCE Node or Entire Cluster**

This command stops the node where it is run:

\$ sudo -u ilo-pce illumio-pce-ctl stop

This command stops the entire cluster and can be run on any node in the cluster:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-stop

### **Restart a PCE Node or Entire Cluster**

This command restarts the node where it is run:

\$ sudo -u ilo-pce illumio-pce-ctl restart

This command restarts the entire cluster and can be run on any node in the cluster:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-restart

When the PCE is restarted, the UI can become available before all the required PCE services are running. In this case, an informative message is displayed in the UI, like "PCE is Unavailable."

#### **Check Node and Cluster Status**

This section describes several ways you can check the status of PCE nodes and clusters.

#### **Check Node Environment**

Run this command to examine the main PCE configuration file runtime\_env.yml and validate it for syntax and basic structure:

\$ sudo -u ilo-pce illumio-pce-env check

#### **Check PCE Node Status**

Run this command to display the status of the PCE node:

\$ sudo -u ilo-pce illumio-pce-ctl status

Node Status Codes:

- 0 Stopped
- 1 All required processes running
- 2 Partial, not all required processes running

For example, when you run the following status command (with semicolon) and echo \$?, you receive the following output:

```
$ sudo -u ilo-pce illumio-pce-ctl status; echo $?
Checking Illumio Runtime RUNNING 0.29s
1
```

To see the PCE node status with standard Linux statuses, you have two options:

Run the status command with the --stdexit option to see the following node status:

- 0 Running
- 1 Running at runlevel 1
- 2 Error
- 3 Stopped

For example:

```
$ sudo -u ilo-pce illumio-pce-ctl status --stdexit
```

Run the PCE service script, which calls the illumio-pce-ctl command and provides standard Linux status codes.

For example:

\$ service illumio-pce status



## NOTE

Running the service script to retrieve status automatically returns the --stdexit status values. However, running the service illumio-pce ctl status command does not insert the --stdexit option.

### **Check Services on a PCE Node**

Run the following command and the -v (verbose) option to display the status of individual services on a PCE node:

```
$ sudo -u ilo-pce illumio-pce-ctl status -v
```

Example output:

```
$ sudo -u ilo-pce illumio-pce-ctl status -v
Checking Illumio Runtime csaefh iimntttttt RUNNING 0.75s
```

The colored string represents the status of the PCE services as described by the following table. Use the characters to determine whether services are in the steady state.

For more information about the services, enter status -s.

Character	Service
а	Agent background worker
С	PCE web console
е	Event service
f	Fluentd
h	HAproxy
i	ilo_monitor or ilocron, in that order
m	memcached
n	nginx
S	Console discovery
t	Various "thin" services

#### **Check PCE Cluster Status**

Run this command to display the PCE cluster status:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status
```

For example:

```
agent_traffic_redis_cache
                             10.6.31.20 10.6.31.19
                             10.6.31.20
agent_traffic_redis_server
agent_traffic_service
                             10.6.31.18 10.6.31.17
auditable_events_service
                             10.6.31.18 10.6.31.17
collector service
                             10.6.31.18 10.6.31.18 10.6.31.17 10.6.31.17
database service
                             10.6.31.20
database_slave_service
                             10.6.31.19
                             10.6.31.18 10.6.31.17
ev service
                             10.6.31.18 10.6.31.17
executor_service
fileserver_service
                             10.6.31.20
                             10.6.31.17 10.6.31.18
fluentd_source_service
login_service
                             10.6.31.18 10.6.31.17
memcached
                             10.6.31.17 10.6.31.18
node monitor
                             10.6.31.18 10.6.31.18 10.6.31.17 10.6.31.17
pg_listener_service
                             10.6.31.20
                             10.6.31.17 10.6.31.18
search_index_service
server load balancer
                             10.6.31.17 10.6.31.18
service_discovery_agent
                             10.6.31.31
service discovery server
                             10.6.31.19 10.6.31.20 10.6.31.32
                             10.6.31.19
set_server_redis_server
Cluster status: RUNNING
```

### **Check PCE Version**

Run this command to display the version of the installed PCE software:

```
$ sudo -u ilo-pce illumio-pce-ctl version
```

#### **Check PCE Cluster Members**

Run this command to display the members of the PCE cluster:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-members
```

### **Update PCE Configuration**

This section describes how to change the configuration of a PCE at any time after the initial configuration is set during PCE installation.

### **Back up PCE Runtime File**

Store a copy of each node's runtime\_env.yml file on a system that is not part of the Supercluster. The default location of the PCE Runtime Environment File is /etc/illumio-pce/runtime\_env.yml.

### **Update Runtime Configuration**

Update the runtime\_env.yml file with the configuration changes.

Run the following command to validate the runtime\_env.yml file:

```
$ sudo -u ilo-pce illumio-pce-env check
```

Run the following command to restart the node with the configuration changes:

\$ sudo -u ilo-pce illumio-pce-ctl restart

#### **Get Current PCE Runlevel**

When you first install the PCE software and start the PCE application, the runlevel is set to 1 by default. At runlevel 1, only the database services are running. This setting allows you to set up the database before the entire PCE application starts running.

Runlevel 1 is also used for upgrading the PCE software. When upgrade the PCE, you need to set the PCE runlevel to 1 before you migrate the PCE database. After database migration finishes, you can set the PCE runlevel back to 5 to start the entire PCE application.

When the PCE software is already at runlevel 5, setting the runlevel to 1 takes effect the next time the software is started.

Run this command to display the current Illumio PCE runlevel:

\$ sudo -u ilo-pce illumio-pce-ctl get-runlevel

#### **Set PCE Runlevel**

Run this command to start the PCE cluster at one of the following runlevels:

- Runlevel 1, which only starts the PCE database
- Runlevel 5, which starts the entire PCE cluster

\$ sudo -u ilo-pce illumio-pce-ctl set-runlevel [1 or 5]

### **Update PCE Certificates**

Whenever the PCE certificates are updated, you must obtain the new certificate and update it on all PCE nodes. Use the following steps.

- 1. Obtain the new certificate.
- 2. Stop all nodes in your deployment:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

**3.** On *all nodes*, load the certificate into the correct directory. For example:

```
/var/lib/illumio_pce/cert
```

- **4.** When the name of the new certificate is different from the name of the old certificate, update the file names in your runtime\_env.yml file on every node.
- **5.** On *all nodes*, validate the certificate:

```
$ sudo -u ilo-pce illumio-pce-env check
```

**6.** Start *all nodes* in your deployment:

\$ sudo -u ilo-pce illumio-pce-ctl start

#### Change the PCE FQDN

To change the PCE FQDN:

- Backup the database and restore the database with the change-fqdn option.
- Configure runtime\_env prior to the restore and make sure the web certificate has the new FQDN.



#### NOTE

Any VENs paired *after* PCE FQDN was changed will receive the masterconfig with the new PCE FQDN.

VENs paired to the PCE *before* the FQDN change will continue to point to the old PCE FQDN. The masterconfig of those VENs will be updated by a periodic job on the VEN or by manually restarting the VEN.

It is necessary that the old PCE FQDN still resolves to the PCE until those VENs can communicate to the PCE with the new FQDN.

Ideally, the old FQDN is used as a Subject Alternative name on the new certificate. This way, the VENs can still connect to the PCE and update the FQDN on its own configuration, which depends on the reason the FQDN is being changed.



#### **WARNING**

Before starting this process, add or generate another certificate with a new FQDN. If you skip this step, your cluster will stay down with old certificates.

You can change the fully-qualified domain name (FQDN) of a PCE as long as the PCE is not part of a Supercluster.

1. On any node, shut down all PCE nodes:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-stop

- 2. Open the file runtime\_env.yml.
- 3. Modify the parameter pce\_fqdn and save the file.
- 4. Validate the runtime\_env.yml file:

\$ sudo -u ilo-pce illumio-pce-env check



#### NOTE

Workloads that were paired with the old FQDN automatically detect and pair with the new FQDN as long as the PCE was stopped long enough for each VEN to attempt and fail at least one heartbeat.

5. On any node, restart the PCE:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-restart

## Upgrade the OS on a Running PCE

You can upgrade the operating system on a running PCE cluster without stopping the entire cluster. Isolate one node at a time, wipe its disk, and install the new operating system while the other nodes in the PCE cluster continue to operate. The PCE can function with a mix of operating system versions on the different nodes.

Use this procedure when upgrading from one operating system version to another. If you are merely installing an operating system patch, you do not need to wipe the disk.

The general steps are as follows:

- 1. Back up the PCE databases.
- 2. Remove one node from the cluster.
- 3. Wipe the disk and install the new operating system version.
- **4.** Install and configure the PCE software.
- 5. Restore the node to the cluster.
- **6.** Repeat this procedure for the other nodes in the PCE cluster.

#### **Back Up the PCE**

- 1. Back up the PCE policy and traffic databases and runtime\_env.yml file.
- 2. Save a copy of the PCE certificate in a safe location (not on the PCE node). Take note of the directory path where the certificate was stored. You will need to replace the certificate in the same location later.
- **3.** Save a copy of the private key in a safe location. Take note of the directory path where the key file was stored. You will need to replace the key in the same location later.

#### **Remove a Node From the Cluster**

Remove one node from the PCE cluster so you can update its operating system. The cluster will continue to operate using the remaining nodes.

Remove and upgrade the nodes in this order:

- Core nodes
- · Replica data node
- Primary data node



#### **CAUTION**

Remove and upgrade the policy database primary data node last to avoid unnecessary failover. To find the primary data node, run the following command on any node in the PCE cluster:

\$ sudo -u ilo-pce illumio-pce-db-management show-master

1. Verify that the cluster is running and healthy. If you remove a node from a PCE that is not in a healthy state, it can cause downtime. There are several ways to check the health of the PCE cluster.

One way to check PCE health is to run the following command:

- \$ sudo -u ilo-pce illumio-pce-ctl cluster-status
- **2.** On the node that is to be removed, stop the PCE software:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

Stopping the PCE software causes PCE services to fail over to their backup node.

**3.** Check to be sure the PCE node is stopped.

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status
```

Expected output:

Checking Illumio Runtime

STOPPED 1.76s

- **4.** When you are removing the *leader node*, wait until the PCE has promoted another node to the leader before proceeding. Run the following command to determine the new leader node:
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-leader
- 5. On the *leader node*, run the following command to be sure the data nodes are synchronized.



### **CAUTION**

-----

To avoid data loss, the data nodes must be synchronized before removing the node from the PCE cluster. Be sure the output from this command shows that the nodes are synchronized.

\$ sudo -u ilo-pce illumio-pce-ctl cluster-status

Expected output is similar to the following:

Reading /etc/illumio-pce/runtime_env.yml.				
SERVICES (runlevel: 5)	NODES (Reachable: 3 of 4)			
=======================================	=======================================			
agent_background_worker_service	192.0.2.241	192.0.2.242		
agent_service	192.0.2.241	192.0.2.242		
agent_traffic_redis_cache	192.0.2.240			
agent_traffic_redis_server	192.0.2.240			
agent_traffic_service	192.0.2.241	192.0.2.241		
192.0.2.242 192.0.2.242				
app_gateway_service	192.0.2.240	192.0.2.241		
192.0.2.242				
auditable_events_service	192.0.2.241	192.0.2.242		
citus_coordinator_replica_service	NOT RUNNING			
citus_coordinator_service	192.0.2.240			
cluster_management_service	192.0.2.241	192.0.2.242		
collector_service	192.0.2.241	192.0.2.241		
192.0.2.242 192.0.2.242				
data_job_queue_redis_replica_service	NOT RUNNING			
data_job_queue_redis_service	192.0.2.240			
data_job_queue_service	192.0.2.241	192.0.2.241		
192.0.2.242 192.0.2.242				
database_monitor	192.0.2.240			
database_service	192.0.2.240			

database_slave_service	NOT RUNNING	
db_cache_manager_service	192.0.2.240	
ev_service	192.0.2.241	192.0.2.242
events_background_worker_service	192.0.2.241	192.0.2.242
executor_service	192.0.2.241	192.0.2.242
fileserver_service	192.0.2.240	
fileserver_slave_service	NOT RUNNING	
flow_analytics_monitor_service	192.0.2.240	
flow_analytics_service	192.0.2.240	192.0.2.240
fluentd_data_service	192.0.2.240	
fluentd_source_service	192.0.2.241	192.0.2.242
fluentd_sys_event_fwd_service	192.0.2.240	192.0.2.241
192.0.2.242		
login_service	192.0.2.241	192.0.2.242
memcached	192.0.2.241	192.0.2.242
network_device_service	192.0.2.241	192.0.2.242
node_monitor	192.0.2.240	192.0.2.241
192.0.2.242		
report_generator_service	192.0.2.241	192.0.2.242
report_monitor_service	192.0.2.240	
reporting_database_monitor	192.0.2.240	
reporting_database_replica_service	NOT RUNNING	
reporting_database_service	192.0.2.240	
reporting_etl_service	192.0.2.241	
reporting_management_service	192.0.2.241	192.0.2.242
search_index_service	192.0.2.241	192.0.2.242
server_load_balancer	192.0.2.241	192.0.2.242
service_discovery_agent	NOT RUNNING	
service_discovery_server	192.0.2.240	192.0.2.241
192.0.2.242		
set_server_redis_server	192.0.2.240	
traffic_database_monitor	192.0.2.240	
traffic_query_service	192.0.2.240	
traffic_worker_service	192.0.2.241	192.0.2.241
192.0.2.242 192.0.2.242		
web_server	192.0.2.241	192.0.2.242
Cluster status: RUNNING		

- 6. Wait until the cluster status has returned to RUNNING.
- 7. On the *leader node*, remove the node. For ip\_address, substitute the IP address of the node you are removing:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-leave ip\_address

Expected output:

Removed node successfully.

8. Check the status of the PCE again to confirm it is still running normally:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status
```

Expected output is similar to that shown in step 5.

#### **Remove OS and Install New**

Remove the old operating system version. Then install the new version. Use the documentation provided by your operating system vendor.

#### Reinstall the PCE

• Install the PCE software and configure its runtime parameters.



#### **IMPORTANT**

Do not start the PCE yet.

- Be sure the PCE FQDN (hostname) is the same as before the upgrade.
- Be sure the and IP addresses for all NICs are the same as before the upgrade.
- Set up NTP and IPTables as described in OS Setup and Package Dependencies in PCE Installation and Upgrade Guide.

#### **Restore PCE Files**

- 1. Copy the runtime\_env.yml file to the same location where it was before.
- 2. Replace the certificate and key files in the same directory path where they were before.
- **3.** Compare the certificate and key file locations to the specified locations in the runtime\_env.yml file to be sure they match.

#### **Restore Node to Cluster**

Restore the node to the cluster.

1. On the node where you just upgraded the OS, run the following command. For ip\_address, substitute the IP address of any running node in the PCE cluster:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-join ip_address
```

After the node successfully joins the PCE cluster, the PCE software is started.

2. Verify that the cluster is functional and data has been synchronized to all data nodes.

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status -w
```

Wait until this command returns output that shows all services are running. The output concludes with this line:

Cluster status: RUNNING

#### **Upgrade and Restore Remaining Nodes**

Repeat this procedure for the other nodes in the PCE cluster. Reminder: Upgrade the primary database node last.

#### **Firewall Coexistence**

To provide additional security, you can supplement Illumio's firewall with your organization's firewalls using Firewall Coexistence. The Illumio firewall can be set to either **Exclusive** mode or **Coexistence** mode via the PCE web console or the Illumio REST API. In both modes, the Illumio firewall is always separate from other firewalls.



### **IMPORTANT**

The Firewall Coexistence feature deprecates the following features:

- Windows FAS VEN coexistence
- Linux VEN NAT ignore
- · Linux VEN container mode

## **Firewall Tampering Protection**


- When coexistence is turned on in primary or secondary mode
   The VEN only monitors its own firewall rules against tampering. When the VEN detects tampering of Illumio firewall rules, an alert is raised, and the VEN reconfigures its firewall rules to its pre-tampered state in order to protect the workload. You can program non-Illumio rules in any table without generating any tampering alerts.
- When coexistence is turned on in primary mode

  The VEN also monitors that the Illumio rule in the main tables "stay on the top" when you choose Illumio to be the primary firewall. When the VEN detects that the Illumio rule is not on the top, an alert is raised, and the VEN moves the Illumio rule back to the top.

#### **Firewall Coexistence Modes**

Exclusive Mode

The default mode is Exclusive, in which Illumio is the only firewall. In this mode, any non-Illumio firewall is not traversed. This behavior applies to all tables in iptables, such as filter, NAT, Raw, or Mangle.

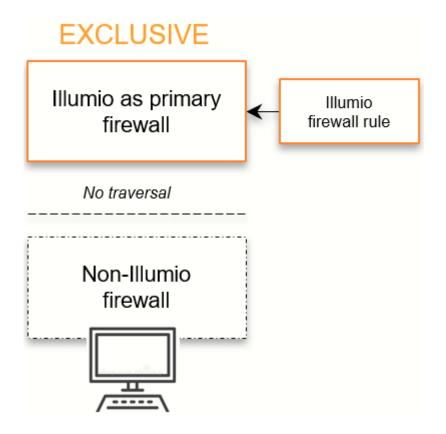

#### Coexistence Mode


With a set of labels and policy states, you can enable Firewall Coexistence for a set of workloads. You can configure coexistence in two ways:


- A configuration in which Illumio is the primary firewall.
- A configuration in which Illumio is *not* the primary firewall.



#### NOTE

The Coexistence mode applies to all tables of the Linux firewall.

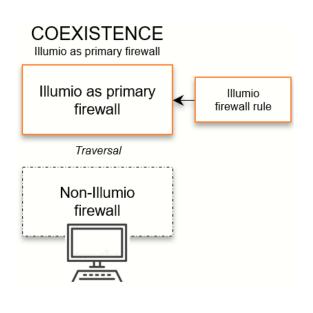

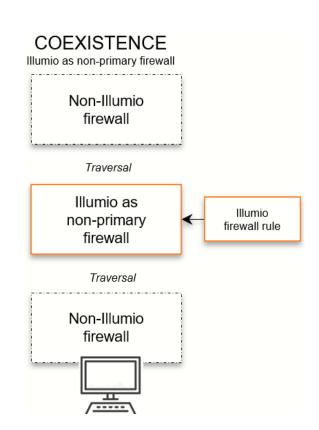

### **Prerequisites and Recommendations**

This release of the Firewall Coexistence feature requires that you upgrade the VEN to 18.3.1 or later. The older versions of Illumio Firewall Coexistence are deprecated.

Windows VEN version 18.3.x ignores the older limited\_wfas\_coexistence and full\_wfas\_coexistence VEN settings for coexistence located in the VEN runtime\_env.yml file. Linux VEN version 18.3.x ignores settings in /etc/default/illumio-agent for NAT table coexistence (container mode).

The following upgrade sequence is required. You must upgrade the VEN last and only after configuring firewall coexistence in the PCE:

### **Recommended Firewall Setting**

For better security, Illumio strongly recommends setting the Illumio firewall as the primary firewall.

When you select Illumio to be the primary firewall, the VEN ensures that the Illumio rule in the main tables "stay on the top" only when you choose Illumio to be the primary firewall. The VEN does not enforce the Illumio rules to be on the top when Illumio is not the primary firewall. This behavior applies to all tables in iptables, such as filter, NAT, Raw, or Mangle.

When the Illumio firewall is set as primary, non-Illumio firewalls are traversed only when the Illumio firewall rules allow the traversal, in which case, packets are passed to non-Illumio firewalls.



#### **IMPORTANT**

When the Illumio firewall is not set as primary, packets passed by non-Illumio firewalls are seen by the Illumio firewall; however, packets accepted by the non-Illumio firewall are not seen by the Illumio firewall.

### **Example**

When the Illumio firewall is not set as primary, and the non-Illumio firewall logs and accepts all traffic on port 22, the Illumio firewall does not see the traffic on port 22.

When packets are allowed by the Illumio firewall, they are passed to other firewalls. Illumio's firewall does not monitor packets dropped by other firewalls. Packets dropped by the Illumio firewall are not passed to non-Illumio firewalls.

#### **Set Firewall Coexistence**



#### **WARNING**

Firewall Coexistence is not supported on Solaris and AIX platforms.


You can set firewall coexistence using either interface:

- PCE web console
- Illumio REST API

To view firewall coexistence settings in the PCE web console:

From the PCE web console menu, choose **Settings** > **Security** > **Firewall Coexistence**. The PCE web console displays the following settings:


- Firewall Coexistence Mode: Exclusive
- System Default: Exclusive applies to all roles, applications, environments, and labels

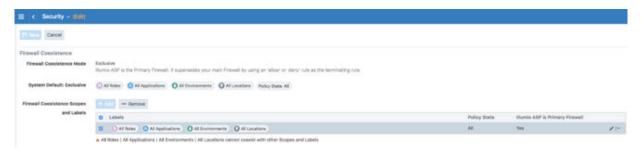

To change firewall coexistence settings via the PCE web console:

- 1. From the PCE web console menu, choose **Settings** > **Security** > **Firewall Coexistence**. The web console displays the default settings.
- 2. Click Edit.

The editing page appears, which displays important guidance at the top of the page. For example, it displays a typical set of labels that conform to the guidance.

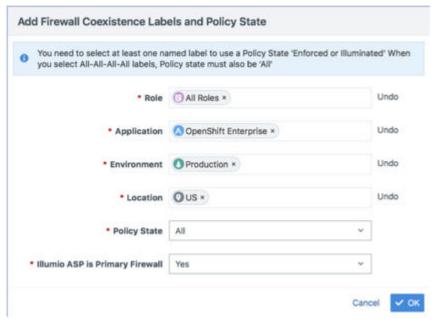

- **3.** Change the Role, Application, Environment, or Location labels according to the guidance at the top of the page.
- 4. Set the policy state.
  - In this example, the policy state is All.
- 5. From the Illumio Core is Primary Firewall list, select Yes.
- 6. Click OK.

The PCE applies the firewall coexistence settings to all provisioned workloads that match the policy labels you have specified. The PCE web console displays the firewall coexistence setting in the Workloads page.

### **PCE Listen Only Mode**

This section describes how to use Listen Only mode when you want to temporarily stop the PCE from sending policy updates to your VENs.

## **About PCE Listen Only Mode**

Enabling Listen Only mode for the PCE is typically used in these situations:

- During PCE maintenance windows, such as PCE backup or maintenance on parts of your network.
- After restoring the PCE from a backup. See PCE Database Backup [118] for information.

In Listen Only mode, VENs still report updated workload information to the PCE; however, the PCE does not modify the firewall rules on any workloads or send any updates to the VENs. The PCE does not mark workloads as offline or remove them from policy when Listen Only mode is enabled.

When this mode is enabled, you can still write policy, pair new workloads, provision policy changes, assign or change workload labels; however, changes are not be sent to the VENs until you disable Listen Only mode. You can disable Listen Only mode when you are ready to resume normal policy operations.

## **Enable PCE Listen Only Mode**

1. On all nodes in the cluster, stop the PCE software:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

2. Set all nodes in the PCE cluster at runlevel 1:

```
$ sudo -u ilo-pce illumio-pce-ctl start --runlevel 1
```

**3.** On any node in the cluster, enable Listen Only mode:

```
$ sudo -u ilo-pce illumio-pce-ctl listen-only-mode enable
```

4. Set the PCE runlevel to 5:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 5
```

### **Determine if PCE Is in Listen Only Mode**

On a data node in the cluster, determine whether the PCE is in Listen Only mode:

```
$ sudo -u ilo-pce illumio-pce-ctl listen-only-mode status
```

Additionally, when the PCE is in Listen Only mode, the PCE web console displays a banner that indicates how long the PCE has been in Listen Only mode.

When Listen Only mode is enabled, the Workloads list page and Workload detail pages indicate the VEN connectivity status is **Syncing** and Policy Sync is **Verified**.

After you disable Listen Only mode and set the PCE runlevel to 5, the PCE receives each VEN's heartbeat and begins applying any changes. After the changes have been synchronized, the VEN connectivity status is **Online** and Policy Sync is **Active**.

## **VEN Heartbeat and Listen Only Mode**

Before you disable Listen Only mode, determine whether your VENs sent recent heartbeats to the PCE while Listen Only mode was enabled. When a VEN hasn't sent a heartbeat to the PCE within the last hour, the PCE will remove that VEN from policy after you disable Listen

Only mode. Large numbers of VENs that haven't heartbeat with the PCE might indicate a problem in the environment that is preventing the VENs from communicating with the PCE. To prevent large numbers of workloads from being marked as offline and removed from policy, investigate and resolve any problems before disabling Listen Only mode.

To determine a VEN's most recent heartbeat, use the Illumio Core REST API. Use the Workloads API with the last\_heartbeat\_on property to GET a workload collection or individual workload.

Examples:

```
GET [api_version][org_href]/workloads
```

```
GET [api_version][workload_href]
```

To determine the last heartbeat for each workload, check the last\_heartbeat\_on property in the agent section (the REST API name for the VEN) of the response.

```
},
"agent": {
"status": {
"last_heartbeat_on": "2017-11-30T01:30:04.734Z",
...
}
},
```

Additionally, use the REST API to query workloads for a VEN heartbeat time that occurred before you enabled PCE Listen Only mode. Before you disable Listen Only mode, investigate any workloads with a heartbeat timestamp prior to when you enabled it.

See Workload Operations in REST API Developer Guide for more information.

### **Query Parameters**

Parameter	Description	Data Type	Re- quired
<pre>last_heart- beat_on[lte]</pre>	Allows you to search for workloads whose last heartbeat occurred before a specific time.	String (time- stamp_in_rfc3339)	No
	1te: Less than or equal to.		
last_heart- beat_on[gte]	Allows you to search for workloads whose last heartbeart occurred after a specific time.	String (time- stamp_in_rfc3339)	No
	gte: Greater than or equal to.		

#### **Example Query**

You enabled PCE Listen Only mode on February 23, 2020 at 7:20 PM. Use the following query parameter to return only those workloads whose last heartbeat occurred before this time. Any workloads that are returned should be checked for connectivity before you disable Listen Only mode.

GET [api\_version][org\_href]/workloads?
last\_heartbeat\_on[lte]=2020-02-23T19:20:29+02:00

### **Disable PCE Listen Only Mode**



#### NOTE

You must run the command to disable PCE Listen Only mode at runlevel 1 or 5.

- **1.** From *one of the data nodes*, disable Listen Only node:
  - \$ sudo -u ilo-pce illumio-pce-ctl listen-only-mode disable
- 2. Verify that PCE Listen Only mode is disabled:
  - \$ sudo -u ilo-pce illumio-pce-ctl listen-only-mode status

## **Expand 2x2 Cluster to 4x2**

This section describes how to expand an existing PCE 2x2 cluster to a 4x2 cluster by adding two core nodes.

## **Prepare Environment for Cluster Expansion**

This section helps you prepare your PCE cluster environment for the new core nodes.

#### **Prepare Server Load Balancer or DNS**

Add the new core node information for a server load balancer (SLB) or DNS:

### Server load balancer (SLB)

Before installing the PCE software on the two new core nodes, perform the following tasks:

- Add the IP addresses of the two new nodes to your load balancer configuration.
- Configure your load balancer to check the health of the new core nodes.
- Run a health check and verify that the two new core nodes are down.
- Verify that traffic is *not* being forwarded to the new nodes.

#### · DNS

Perform the following tasks:

- Add the two new nodes to your DNS configuration.
- When TCP connectivity from the VENs to the PCE is direct and not routed through a
  virtual IP (VIP), modify the runtime\_env.yml on all four nodes in the existing cluster and
  change the cluster\_public\_ip > cluster\_fqdn to include the two new core nodes.
   Define this parameter as a list of IP addresses that the VENs can connect to, which is the
  load balancing VIP or a list of all core nodes in the cluster.

For example:

- <existing\_core\_node\_ip\_address>
- <new\_core\_ip\_node\_address>
- <new\_core\_ip\_node\_address>

### **Ensure Connectivity from VENs to New Nodes**

Ensure that connectivity from existing VENs to the new core nodes is allowed and working; for example, you might need to update your network's firewall policies to permit access from existing VENs to the new core nodes.

### **Prepare the Cluster for New Nodes**

Before you install the PCE software on the new core nodes, perform the following tasks.

1. Stop the cluster by running this command:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

2. Validate the cluster's configuration by running this command:

```
$ sudo -u ilo-pce illumio-pce-ctl check-env
```

**3.** Start the cluster by running this command:

```
$ sudo -u ilo-pce illumio-pce-ctl start
```

The PCE configures all VENs to include access to the new core nodes. When complete, all your VENs should be listed as online.

## **Back Up PCE Database**

Before you expand your 2x2 cluster, create a backup of your PCE database.

## **Configure Existing Nodes for Expansion**

1. On all nodes in the existing cluster, stop the PCE software:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

2. Before you modify the runtime\_env.yml file on the existing nodes, create a file backup in case you need to revert back to the last known configuration.

For example, on all nodes, run this command:

```
cp /etc/illumio-pce/runtime_env.yml /etc/illumio-pce/runtime_env.yml.bak
```

- **3.** Modify both new core nodes' runtime\_env.yml file so that the node\_type parameter is defined as core. For example, change the parameter from core0 or core1 to core.
- **4.** On all nodes, modify the runtime\_env.yml file to define the cluster\_type parameter as 6node\_v0 and save the file. Your runtime\_env.yml file might not have this parameter; you only need to add it when it does not already exist.

For example:

```
cluster_type: 6node_v0
```

5. On all nodes in the existing cluster, check the syntax of the runtime\_env.yml configuration:

```
$ sudo -u ilo-pce illumio-pce-env check
```

**6.** On all nodes in the existing cluster, restart the PCE with the configuration changes:

```
$ sudo -u ilo-pce install_root/illumio-pce-ctl restart
```

7. On any node in the cluster, check the cluster status:

\$ sudo -u ilo-pce install\_root/illumio-pce-ctl cluster-status

The status of the cluster should return as RUNNING.

## **Install and Configure PCE on Nodes**

Install the PCE software and configure the new core nodes using the same RPM used to install the existing nodes, and use the same system and environmental configuration as the existing two core nodes. This configuration includes all runtime\_env.yml settings, kernel performance modifications, syslog configurations, DNS, and NTP.



### **CAUTION**

Use the same RPM you used to install the existing PCE nodes to install the PCE software on the new nodes.

After you have installed the PCE software, perform these steps:

- 1. For layer 4 load balancer implementations, confirm that two of the core nodes are present and UP on the load balancer. These nodes should match with those shown in cluster-status with the role of server\_load\_balancer. When nodes in the cluster fail, the nodes that own the server load balancer role can change.
- 2. Ensure that the TLS certificate is valid for the new nodes as well as the existing nodes. The certificate might contain only the cluster name, or might include each of the core node names in the SAN field. When the SAN field is used, ensure that both of the new core nodes are included.
- **3.** Copy the certificate and key from the existing core nodes to the new core nodes in /var/lib/illumio-pce/cert (or wherever you defined this location in the runtime env.yml file).
- **4.** Copy the runtime\_env.yml file from an existing core node to the new core nodes. Ensure that when nodes have a specific configuration, such as internal\_service\_ip, you configure this parameter on the new core nodes to correctly reflect the configuration on the two new nodes.
- **5.** Verify that the new nodes have the correct node\_type (core) and cluster\_type (6node\_v0) and, when using a DNS load balancer, verify that all four core nodes are defined in the runtime parameter named cluster\_public\_ips > cluster\_fqdn.
- 6. On all new core nodes, verify that the new core nodes were configured correctly:
  - \$ sudo -u ilo-pce illumio-pce-ctl check-env
- 7. Find the IP address of the cluster leader node:
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-leader
- **8.** On any existing node in the cluster (not the new node you are about to add), run the following command. For ip\_address, substitute the IP address of the first new node.
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-nodes allow ip\_address
- **9.** On the *first new node*, insert the first new core node into the cluster. Use the cluster leader node IP address that you found in the earlier step.
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-join ip\_address\_of\_leader\_node

This command should confirm the node is added and report that there are 5 nodes in the cluster.

- 10 On any existing node in the cluster (not the second new node you are about to add),
- run the following command. For *ip\_address*, substitute the IP address of the second new node.
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-nodes allow ip\_address
- 11. On the second new node, insert the second new core node into the cluster:

```
sudo -u ilo-pce illumio-pce-ctl cluster-join ip_address_of_leader_node
```

This command should confirm the node is added and report that there are 6 nodes in the cluster.

**12.** On *all nodes*, restart the PCE software with the configuration changes:

```
$ sudo -u ilo-pce illumio-pce-ctl restart
```

### **Verify Cluster Expansion**

Perform these steps to ensure that you have successfully expanded your PCE 2x2 to a 4x2 cluster.

1. To verify that the cluster is fully up and running and all PCE services are at runlevel 5, run the status command:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status
```

2. Confirm that the cluster contains 6 nodes:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-members
```

- 3. When you are using a server load balancer to manager PCE traffic, confirm on the load balancer that two of the core nodes are present and listed as UP. These nodes should match those shown from the cluster-status command with the role of server\_load\_balancer. When nodes in the cluster fail, the nodes that own the server\_load\_balancer role can change.
- **4.** Verify that you can log into the PCE web console and navigate the interface successfully.
- **5.** Verify that logs are being populated in the logging directory of the new nodes, and (when configured) logs are being forwarded to external log destinations.
- **6.** Verify that your workload VENs are online in the Workloads page of the PCE web console. Be aware that VENs might be offline occasionally for unrelated reasons; therefore, compare the VEN connectivity status to your baseline.



#### NOTE

Large numbers of VENs remaining in Syncing state can indicate that one of the core nodes is not reachable due to a network firewall, load balancer, or runtime\_env.yml misconfiguration.

## **Replace PCE Nodes or Uninstall Cluster**

This section describes how to add a new node to take the place of one that has failed. It also describes how to uninstall the PCE.



#### NOTE

You can replace only one PCE node at a time.

## Replace a Failed Node

1. Determine which node is the cluster leader:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-leader

2. On the cluster leader node, remove the failed node:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-leave ip\_address

Where ip\_address is the IP address of the failed node.

- **3.** Before adding the new replacement node, ensure that:
  - The new node has a valid runtime env.yml file configured.
  - The PCE software is not running.
- **4.** On any existing node in the cluster (not the new node you are about to add), run the following command. For *ip address*, substitute the IP address of the new node.

\$ sudo -u ilo-pce illumio-pce-ctl cluster-nodes allow ip\_address

5. On the new node, run the following command to add the new node to the cluster:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-join ip\_address

Where ip\_address is the IP address of any existing running node within the cluster.

After the new node successfully joins the PCE cluster, the PCE software is started.

#### **Replace a Running Node**

Perform this procedure to take offline or replace a running node in the cluster; for example, when you need to upgrade the host hardware.



### NOTE

Performing these steps on a *data node* can result in the loss of your Illumination data and existing VEN Support Reports.

1. Stop the PCE software:

\$ sudo -u ilo-pce illumio-pce-ctl stop

Stopping the PCE software causes PCE services to fail over to their backup node.

2. Wait for the node to enter the FAILED state. To check this status, run the following command on any other node:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-members

**3.** When you are removing the *leader node*, wait until the PCE has promoted another node to the leader before proceeding. Run the following command to determine the new leader node:

- \$ sudo -u ilo-pce illumio-pce-ctl cluster-leader
- **4.** On the *leader node*, remove the failed node:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-leave ip_address
```

- **5.** Before adding the new replacement node, ensure that:
  - The node has a valid runtime env.yml file configured.
  - The PCE system software is not running.
- **6.** On any existing node in the cluster (not the new node you are about to add), run the following command. For *ip address*, substitute the IP address of the new node.

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-nodes allow ip_address
```

7. On the new node, run the following command to add the new node to the cluster:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-join ip_address
```

Where ip\_address is the IP address of any existing running node within the cluster.

After the new node successfully joins the PCE cluster, the PCE software is started.

## **Uninstall the PCE Cluster**

To completely uninstall and remove the PCE for your system, perform the following steps:

1. Run this command to remove the PCE:

```
$ rpm -e illumio-pce
```

2. Manually delete these directories:

```
/var/lib/illumio-pce
/var/log/illumio-pce
/etc/illumio-pce
```

# **PCE Database Management**

This section describes how to manage the PCE databases, backups, failover and restore.

#### About the PCE Databases

This section describes concepts you need to know to successfully administer the PCE databases.

## **Policy and Traffic Data Databases**

The PCE uses two databases: one for policies and the other for traffic flow data. Both databases need to be backed up or restored.

Database	Summary of Command	Notes
Policy	<pre>illumio-pce-db-management dumpfile back- up_filename</pre>	Backs up the policy database.

Database	Summary of Command	Notes
Traffic	illumio-pce-db-management traffic dumpfile traffic_backup_filename	Back up the traffic database by adding the traffic parameter.

#### **Data Retention of Traffic Flow Summaries**

The PCE removes traffic flow data summaries (used by the Explorer in the PCE web console) when these conditions occur:

- The disk size of the traffic flow summaries exceeds the disk space allocated for the data.
- The traffic data database has been inactive for 90 days.

### **Determine the Primary Database**

Policy Database

Run the following command to determine the primary policy database:

sudo -u ilo-pce illumio-pce-db-management show-master

Traffic Database

Run the following command to determine the primary traffic database:

sudo -u ilo-pce illumio-pce-db-management traffic show-master

### **Show Database Replication Information**

Run the following command to view information about data replication between the primary and replica databases:

sudo -u ilo-pce illumio-pce-db-management show-replication-info

### **Rotate Database Passwords and Other Secrets**

At any time, an Illumio Administrator can rotate the PCE database passwords and other auto-generated secrets used within the PCE. The new secrets take effect when the PCE is restarted. To rotate secrets, run the following command on any node:

sudo -u ilo-pce illumio-pce-ctl rotate-secrets

In a Supercluster, run this command once for each region.

## **Anonymize Database Export**

You can anonymize the database dump file to protect confidential data before sending it to Illumio Customer Support for troubleshooting purposes. You can safely share policy and configuration data with Illumio for support requests. Sensitive data, such as usernames, passwords, and IP addresses, are masked.

1. Dump the policy or traffic database by running one of the following commands. Policy database

sudo -u ilo-pce /opt/illumio\_pce/illumio-pce-db-management dump --file
backup filename

Traffic database

sudo -u ilo-pce /opt/illumio\_pce/illumio-pce-db-management traffic dump
--for-masking --file traffic\_backup\_filename

**2.** Anonymize the policy or traffic dump file by running one of the following commands. Policy dump file

```
sudo -u ilo-pce /opt/illumio_pce/illumio-pce-db-management mask-db-
dump --in-file backup_filename --out-file masked_filename --dict-file
dictionary.txt --tmpdir path_to_alternate_tmp_dir;
```

Traffic dump file (add the --traffic flag)

```
sudo -u ilo-pce /opt/illumio_pce/illumio-pce-db-management mask-db-dump
--traffic --in-file backup_filename --out-file masked_filename --dict-
file dictionary.txt --tmpdir path_to_alternate_tmp_dir;
```

Optional --tmpdir parameter

The /tmp directory stores intermediate files and can sometimes run out of space. Use --tmpdir to specify an alternate temporary directory with adequate space.

Example command output

```
Dictionary file /home/pce/dictionary.txt will be created
Reading /home/pce/backup.july.11.2019.tar.bz2
Processing avenger_fileserver_dev.sql
Processing avenger_executor_dev.sql
Processing avenger_ops_dev.sql
Processing avenger_events_dev.sql
Processing avenger_agent_dev.sql
Processing avenger_login_dev.sql
Processing avenger_login_dev.sql
Processing avenger_node.uuid
Processing avenger_node.uuid
Processing avenger_cluster.uuid
Writing /home/pce/masked_backup.july.11.2019.tar.bz2
Writing dictionary file /home/pce/dictionary.txt
Done
```

3. Send the anonymized output file named in --out-file to Illumio Customer Support.



#### **CAUTION**

Do not send the dictionary file to Illumio (dictionary.txt in the command above). Retain it at your own site. It contains the mapping from the umasked data to the masked data.

Illumio recommends consistently using the same dictionary file. This approach ensures that the same value is consistently masked and you can compare changes between different masked database dumps.

## **View Events Using PCE Command Line**

You can view events using the PCE command line.

Run the following command at any runlevel to display:

- The total number of events
- The average number of events per day

```
sudo -u ilo-pce illumio-pce-db-management events-db events-db-show
```

Run the following command at any runlevel to display:

- The amount of disk space used by events
- The total number of events
- The disk usage based on type of event

```
sudo -u ilo-pce illumio-pce-db-management events-db disk-usage-show
```

### Example

```
illumio-pce-db-management events-db disk-usage-show
Reading /opt/pce_config/etc/runtime_env.yml.
INSTALL_ROOT=/var/illumio_pce
RENV=development
Events database disk usage summary:
Number of events: 6
Average number of events per day: 6
Total disk usage: 0.539 MB (565248.0 bytes)
Disk usage by event_type:
                       | Count | Disk Usage |
Event Type
system_task.prune_old_log_events | 1 | 0.090 MB
                             | 1
                                    0.090 MB
user.login
                                  | 0.090 MB
| 0.090 MB
user.logout
                              | 1
user.sign_in
                              1
                            2 | 0.180 MB
user.sign_out
```

### **PCE Database Backup**

This section provides step-by-step instructions for backing up the PCE databases. Before you start, be sure you understand the technical details of the two PCE databases; see About the PCE Databases [115] for information.



### NOTE

The PCE runtime configuration file, runtime\_env.yml, is not included in database backups. You must back up this important file separately. See Back Up the PCE Runtime Environment File [122].

## **About PCE Database Backup**

You use the PCE database command line utility illumio-pce-db-management to back up, migrate, manage failover, and restore the PCE databases.



#### **IMPORTANT**

You must run the PCE database commands as the PCE runtime user ilo-pce

#### When to Back Up

Follow your organization's backup policies and procedures, including frequency (such as, hourly, daily, or weekly) and retention location (namely, offsite or on a system other than the PCE cluster nodes).

Illumio recommends backing up the PCE databases in the following situations:

- Before and after a PCE version upgrade
- After pairing a large number of VENs
- After updating a large number of workloads (such as, changing workload policy state or applying labels)
- After provisioning major policy changes
- After making major changes in your environment that affect workload information (such as, IP address changes)
- On-demand backups before performing the procedures in this guide

### **Back Up the Policy Database**

Perform these steps to back up all PCE data, such as before upgrading the PCE.

1. (On an SNC, skip this step.) Before you back up the PCE, determine which data node is running the agent\_traffic\_redis\_server service:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status
```

You see the following output:

**2.** On the *data node* that is running the agent\_traffic\_redis\_server service, run the following commands:

```
$ sudo -u ilo-pce illumio-pce-db-management dump --file <location-of-db-
dump-file>
```

\$ sudo -u ilo-pce illumio-pce-db-management traffic dump --file
<location-of-traffic-dump-file>

In

location-of-db-dump-file

and

location-of-traffic-dump-file

enter a file name for the policy database dump and the traffic database dump files, respectively.



#### NOTE

On an SNC, run these commands on the single node.

**3.** After the dump commands finish, copy the backup files to a fault-tolerant storage location.

## **Back Up the Traffic Database**

The traffic database dump can be very large, depending on the traffic datastore size. Therefore, the Supercluster database dump on leader and member PCEs does not include the traffic database dump. The following procedure is provided to back up the traffic data separately.



#### NOTE

If you have a multi-node traffic database, do not use this procedure for routine backups. In a multi-node traffic database, the procedure in this section is used only for the initial installation of the multi-node database or when adding or removing worker nodes. For routine backups in a multi-node traffic database, use pgbackrest instead. See Using pgbackrest for Traffic Data Backups [120].

Perform these steps to back up the traffic database only. If you need to back up the traffic flow data, perform this procedure on every region; traffic flow information is unique to every (region) PCE.

1. On any data node, run the following command:

\$ sudo -u ilo-pce illumio-pce-db-management traffic dump --file
<path\_to\_traffic\_backup\_file.tar.gz>

In path\_to\_traffic\_backup\_file.tar.gz, include the filename extension .tar.gz.

2. After the command finishes, copy the backup file to a fault-tolerant storage location.

### Using pgbackrest for Traffic Data Backups

Instead of using the built-in PCE backup commands, you can use the pgbackrest tool. For example, pgbackrest can be useful if you have dedicated storage for backups, such as NFS network shared storage. If you have a multi-node traffic database, you must use pgbackrest for backups to ensure adequate space and performance.

Hardware Requirements

A shared filesystem such as NFS mount which is mounted on all the PCE nodes is required for pgbackrest to work. Make sure the NFS disk has enough space to store multiple backups. Specify the root location of this mount with the backup\_root key in the runtime env.yaml, shown below in "Enabling pgbackrest."

The NFS mount can be used to store other data in addition to the traffic data. For example, it could store the policy database and runtime\_env.yml file. The NFS mount must be a solid-state drive (SSD) disk. Rotational disks cannot be used, because they are too slow for the amount of data involved.

To calculate the size of the NFS mount needed for a multi-node traffic database, use the following formula: Number of worker node pairs  $\times$  150 GB  $\times$  number of days retained + storage needed when occasionally adding or removing a node, which is 400 GB  $\times$  number of worker node pairs. Optionally, add the amount of storage needed for any additional uses, such as the policy database.

Enabling pgbackrest

To enable the pgbackrest tool, add the following commands to the server runtime\_env.yaml, with your cluster values specified where needed:

```
traffic_datastore_backup_service:
  pgbackrest_enabled: true
  backup_destination_type: 'filesystem'
  backup_root: '<location of NFS root>'
  backup_encryption_key: '<location of file that contains the backup
  encryption key>'
  max_full_backups: '<max number of full backups to retain>' # Defaults to 2
```

Back Up the Traffic Database (pgbackrest)

Use the following command to take a backup of the traffic database cluster. In a multi-node traffic database, you can run this command on any coordinator or worker node:

```
$ sudo -u ilo-pce illumio-pce-db-management traffic cluster-backup
```

List Available Backups (pgbackrest)

Use the following command to get the list of backups available, in the order in which they were taken:

```
$ sudo -u ilo-pce illumio-pce-db-management traffic cluster-backup-list
```

Restore a Backup (pgbackrest)

Use the following commands to restore data from a given backup. For backup label, substitute the label of the backup to restore:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 1
$ sudo -u ilo-pce illumio-pce-db-management traffic cluster-restore
--backup-label backupLabel
```

## **Back Up the PCE Runtime Environment File**

The PCE runtime configuration file, runtime\_env.yml, is not included in automatic PCE backups. You must manually back up this file to a secure location.

Store a copy of each node's runtime\_env.yml file on a system that is not part of the PCE cluster. By default, the PCE Runtime Environment File is located at the following location on each node:

/etc/illumio-pce/runtime\_env.yml

If the file is not found there, it has been moved to a custom location. To find the file, check the ILLUMIO RUNTIME ENV environment variable.



#### **IMPORTANT**

The runtime\_env.yml file contains sensitive information that should be kept secret, such as encryption keys. Take steps to ensure the confidentiality of this file

## **Database Migration, Failover, and Restore**

This section describes how to perform database management tasks.

### **Migrate PCE Databases**

These steps explain how to migrate the database from a previous version to a current one. You must run this command at runlevel 1 in the following cases:

- After you have upgraded to a newer version of the PCE software.
- After restoring a backup file from a previous version of the PCE software.
- After you have completed a new PCE build and installation and initialized the database via the Illumio-pce-db-management setup command.

To migrate the PCE database:

**1.** On any node, migrate the PCE database:

```
$ sudo -u ilo-pce illumio-pce-db-management migrate
```

2. On the primary database, set the cluster to runlevel 5:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 5
```

Setting runlevel might take some time to complete.

**3.** Check the progress to see when the status is **RUNNING**:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-status -w

### **Manage Automatic Database Failover**

When the primary database experiences a failure event lasting more than 2 minutes, the PCE automatically fails over to the backup database. Failing over the database causes other PCE services to restart. During the database failover period, REST API requests might fail and the PCE web console might become unresponsive.

When the primary database node comes back online and rejoins the cluster, it will detect it is no longer the primary and become the backup database.

### **Determine Which Node Is Primary**



#### NOTE

When you install the PCE software, the first data node you install becomes the primary database. Upgrading the PCE does not change the primary database to another data node.

\$ sudo -u ilo-pce illumio-pce-db-management show-master

#### View Auto Failover Mode

\$ sudo -u ilo-pce illumio-pce-db-management get-auto-failover

Example output:

\$ sudo -u ilo-pce illumio-pce-db-management get-auto-failover

Database Failover mode: 'off'

### **Turn Auto Failover Off or On**

Automatic failover is enabled by default. To disable it, run the following command:

\$ sudo -u ilo-pce illumio-pce-db-management set-auto-failover off

### **Manual Database Failover**

1. Determine which node that is running as the primary database:

\$ sudo -u ilo-pce illumio-pce-db-management show-master

2. On the *primary database node*, stop the PCE software on the node:

\$ sudo -u ilo-pce illumio-pce-ctl stop

Wait roughly two minutes for the new node to take over.

3. On the new database node, verify that the database service is running:

\$ sudo -u ilo-pce illumio-pce-db-management show-master

**4.** On the *previous primary database node* in the PCE cluster, restart the PCE software:

\$ sudo -u ilo-pce illumio-pce-ctl start

After the node starts, the PCE recognizes it as the replica database node and will sync it with the primary database node.

### **Restore from Data Backup**

This task describes how to restore a PCE cluster from a data backup.

We can restore to a different FQDN using the --update-fqdn option on the restore for the policy DB. This requires the runtime\_env.yml to have the pce\_fqdn option set to the new PCE FQDN before running the PCE in runlevel 1.



#### NOTE

Illumio recommends waiting at least 15 minutes to restore a policy database backup after taking it. When you restore a policy database backup sooner than 15 minutes, the PCE might only apply policy correctly to some workloads.

- 1. On all nodes in the PCE cluster, stop the PCE software:
  - \$ sudo -u ilo-pce illumio-pce-ctl stop
- 2. On all nodes in the PCE cluster, start the PCE at runlevel 1:
  - \$ sudo -u ilo-pce illumio-pce-ctl start --runlevel 1
- **3.** On *any node*, verify the runlevel:
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-status -w
- **4.** Restore the policy database to the *data node* that is running the agent\_traffic\_redis\_server service. (For information about how to determine which node this is, see the "Back Up the Policy Database" topic.)
  - \$ sudo -u ilo-pce illumio-pce-db-management restore --file /path/to/
    policy\_db\_dump\_file
  - \$ sudo -u ilo-pce illumio-pce-db-management migrate
- **5.** Copy the Illumination data file from the primary data node that is running the agent\_traffic\_redis\_server service to the replica data node. The file is located in the following directory on both nodes.
  - persistent\_data\_root/redis/redis\_traffic\_0\_master.rdb
- **6.** Restore the traffic database. Run this command on the same node where you took the traffic database backup.
  - \$ sudo -u ilo-pce illumio-pce-db-management traffic restore --file /
    path/to/traffic\_db\_dump\_file

When prompted to bring the PCE to runlevel 5, reply "yes" if you want the PCE to automatically finish migrating the traffic database and bring the PCE to fully operational status. Reply "no" if you don't want to migrate the traffic database.

- **7.** If you chose "no" in the previous step:
  - Return the PCE cluster to runlevel 5:
  - \$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 5

8. On any node, verify the runlevel is 5:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-status -w

9. Take the PCE out of Listen Only mode:

\$ sudo -u ilo-pce /opt/illumio-pce/illumio-pce-ctl listen-only-mode
disable



#### NOTE

Explorer will be in maintenance mode for some time after the restore commands complete. The PCE is made available immediately, but the Explorer database restore continues in the background.

### **Manage Multi-Node Traffic Database**

You can scale traffic data by sharding it across multiple PCE data nodes. This can be done when first installing the PCE.

You can also expand an existing traffic database to multiple nodes and change the number of nodes as needed. Reasons for doing so include:

- If you experience performance problems with ingestion or Explorer with a single-node traffic database, these performance issues could be solved by migrating to a multi-node traffic database.
- If you need to store more data than the single-node traffic database can handle (for example, if you want to store 90 days of data), a multi-node traffic database may be required.

### **Expand Existing Traffic Database to Multiple Nodes**

To reconfigure an existing PCE cluster to scale the traffic database to multiple nodes, use the following steps. The PCE will have to be taken offline for a maintenance window. The duration of this maintenance window depends on the amount of data in the traffic database. For a database of 400GB, the downtime is up to approximately 3 hours.

1. On any data node, run the following command to back up the traffic database:

```
$ sudo -u ilo-pc e illumio-pce-db-management traffic dump --file
trafficdb-backup.tar.gz
```

2. On any data node, run the following command to back up the reporting database:

```
$ sudo -u ilo-pc e illumio-pce-db-management report dump --file reportdb-backup.tar.gz
```

**3.** On *all new nodes*, run the following command to allow multi-node traffic, where the address is the IP address of each new node:

```
illumio-pce-ctl cluster-nodes allow <address>
```

**4.** On *all nodes*, stop the PCE:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

- **5.** Install the PCE software on the new coordinator and worker nodes, using the same version of the PCE that is present on the existing nodes in the cluster. There must be exactly two (2) coordinator nodes. There must be two (2) or more pairs of worker nodes.
- **6.** Update the runtime\_env.yml configuration on every node (the new ones you just added as well as the ones that were already in the PCE cluster) as follows.
  - Set the cluster type to 4node\_dx for a 2x2 PCE or 6node\_dx for a 4x2 PCE.
  - In the traffic\_datastore section, set num\_worker\_nodes to the number of worker node pairs. For example, if the PCE cluster has 4 worker nodes, set this parameter to 2.
  - On each coordinator node, in addition to the settings already desribed, set node\_type to citus\_coordinator.
  - On each worker node, in addition to the settings already desribed, set node\_type to citus\_worker.
  - If you are using a split-datacenter deployment, set the datacenter parameter on each node to an arbitrary value that indicates what part of the datacenter the node is in.
- **7.** Check the runtime configuration:
  - \$ sudo -u ilo-pce illumio-pce-env check
- 8. On all nodes, start the PCE at runlevel 1:
  - \$ sudo -u ilo-pce illumio-pce-ctl start --runlevel 1
- **9.** When the PCE is up and running at level 1, restore the reporting database backup. Run this command on the node where you took the backup.
  - \$ sudo -u ilo-pce illumio-pce-db-management report restore --file pcereportdb-dump.tar.gz
- 10 On one of the coordinator nodes, migrate the traffic database. This will create the data-
- . base on the coordinator node.
  - \$ sudo -u ilo-pce illumio-pce-db-management traffic migrate
- **11.** On the *node where you took the backup*, restore the traffic database backup that you made in step 1:

```
$ sudo -u ilo-pce illumio-pce-db-management traffic restore --file
trafficdb-backup.tar.gz
```

When prompted, reply Y if you want to bring the PCE up to runlevel 5 while the database restore continues in the background. This makes all PCE features except Explorer available immediately, without having to wait for the restore to complete.

If you do not choose to go to runlevel 5 at this time, you can do so later by running the following command on *any node*:

- \$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 5
- 12. On any node, check the cluster status:
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-status -w
- **13.** When the cluster status is UP and RUNNING, verify successful setup. Log in to the PCE web console and verify that the health of the PCE is good. Check Explorer by running a few queries.

### Add or Remove a Worker Node

To add or remove a worker node in a multi-node traffic database, use the following steps. The PCE will have to be taken offline for a maintenance window. The duration of this maintenance window depends on the amount of data in the traffic database.



### **WARNING**

Be sure that the final number of worker nodes is an even number. Worker nodes can only function in groups of two.

1. On any data node, run the following command to back up the traffic database:

```
$ sudo -u ilo-pce illumio-pce-db-management traffic dump --file
trafficdb_backup.tar.gz
```

2. On any node, set the PCE to runlevel 1:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 1
```

3. When removing a node, run the following command on the node you are removing:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-leave
```

**4.** On all nodes, stop the PCE cluster:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-stop
```

- **5.** On every PCE node, update the value of traffic\_datastore.num\_worker\_nodes in runtime\_env.yml. The value should always be twice as large as the number of individual worker nodes, because the worker nodes are configured in pairs.
- **6.** On *all nodes*, start the PCE at runlevel 1:

```
$ sudo -u ilo-pce illumio-pce-ctl start --runlevel 1
```

7. On the data node where you took the backup, restore the traffic database backup that you made in step 1:

```
$ sudo -u ilo-pce illumio-pce-db-management traffic restore --file
trafficdb_backup.tar.gz
```

8. On any node, set the PCE to runlevel 5:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 5
```

**9.** Verify successful setup. Log in to the PCE web console and verify that the health of the PCE is good. Check Explorer by running a few queries.

## **Back Up and Restore Multi-Node Traffic Database**

When your PCE cluster includes a multi-node traffic database, the data size increases, and the standard PCE backup and restore commands consume too much time and resources. To back up and restore multi-node traffic data, use pgbackrest instead. For more information, see Using pgbackrest for Traffic Data Backups [120].

#### **Database Management Commands for Multi-Node Traffic Database**

Following are some useful commands to get information about a cluster where the traffic database is distributed to multiple nodes.

To show the worker node configuration:

```
$ sudo -u ilo-pce illumio-pce-db-management traffic citus-worker-metadata
```

To show worker primary nodes:

\$ sudo -u ilo-pce illumio-pce-db-management traffic show-citus-worker-primaries

To show worker replication information:

\$ sudo -u ilo-pce illumio-pce-db-management traffic show-citus-worker-replication-info

## **PCE Default Object Limits**

The PCE enforces certain soft and hard limits to restrict the total number of system objects that you can create. These limits are set based on the tested performance and capacity limits of the PCE.

### **Types of Object Limits**

This section describes the difference between soft and hard limits.

#### **Soft Limits**

Soft limits serve as an early warning for potential PCE scale and performance issues. When you see a soft limit warning, contact Illumio Customer Support to discuss the potential impact of this alert on your deployment.

When the PCE reaches a soft limit, it logs an organization (audit) event that indicates the soft limit for that object has been reached:

#### soft\_limit\_exceeded

You should investigate soft limit alerts on a non-emergency basis. When PCE services are functioning normally, but the PCE is generating a lot of soft limit alerts, consult Illumio Customer Support about altering or suppressing the soft limit alerts.



#### NOTE

When you lower a soft limit below the current actual usage, the PCE does not generate an event.

#### **Hard Limits**

Hard limits protect the PCE from usage and performance overloads, such as creating too many workloads, or too large a security policy. When you receive a hard limit warning, Illumio recommends that you investigate it immediately. When a hard limit is reached in conjunction with a service outage, a PCE core capacity might be overloaded.

When a hard limit is reached, any attempt to create more objects of that type will fail and result in an error message in the PCE web console or a HTTP 406 error returned in REST API. In addition, the PCE logs this event:

#### hard\_limit\_exceeded

When you reach a hard limit, contact Illumio Customer Support to discuss your PCE deployment.

### **Check Object Limits and Usage**

To check the status and usage of the current object limits, run the following command:

\$ sudo -u ilo-pce <install\_root>/illumio-pce-ctl obj-limits list



#### **WARNING**

When your current usage for any object type shows that you are approaching a soft or hard object limit, contact Illumio Customer Support for assistance.

The CLI commands illumio-pce-db-management events-storage and illumio-pce-env show information about hard and soft limits and related events.

- illumio-pce-db-management events-storage CLI commands list when the soft-cap reached, hard-cap reached, and hard-cap exited conditions were last observed.
- illumio-pce-db-management events-storage CLI commands list the current soft-cap and hard-cap limits.
- illumio-pce-env command displays a warning if a hard cap condition exists, but the command does not fail.

Example:

```
$ illumio-pce-db-management events-storage

Reading /opt/pce_config/etc/runtime_env.yml.
INSTALL_ROOT=/var/illumio_pce
RENV=development

Event limit conditions status
Current events soft_limit, hard_limit (in MB): [7132, 8915]
Events soft limit last exceeded at:
Events hard limit last exceeded at:
Last recovered from events hard limit exceeded condition at:

Done.
```

## **Object Limits During Bulk Create**

When you use the Illumio REST API to perform an asynchronous job, such as bulk creation of multiple workloads, and you reach the workload object limit during the job, the job will successfully create as many workloads within the limit, and fail to create more workloads.

The HTTP response shows that some workloads were successfully created, and includes a failure message for each workload that was not created due to the hard limit.

For example:

## **Object Limits and Concurrent Transactions**

When multiple users create the same type of object simultaneously, the PCE can reach the hard object limit for that object concurrently during the parallel transactions. This type of "race" condition is atypical but can occur.

For example, a PCE has 900 rules. Two users each simultaneously add 100 rules in a single transaction. After their two transactions, the rule object count is 1100. When the two transactions occur simultaneously and the PCE reaches a hard limit for that object, both transaction can return an error after the PCE reaches the limit.

## **PCE Object Limits**

The following table lists all PCE object limits, identified by each object name followed by the object's keyname in parentheses. The object keyname is displayed when you run the illumio-pce-ctl obj-limits list command on one of the nodes in your cluster.

Object	Description	Soft Limit	Hard Lim- it
VENS per PCE	Total number of VENs that have been installed on managed workloads	SNC: 250	SNC: 10,000
(active_agents_per_pce)		2x2 (small): 2,000	2x2 (small): 2,500
		2×2:	2x2: 10,000
		8,000	4x2: 25,000
		4x2: 20,000	
Labels	Total number of labels	20,000	25,000
(total_labels)			
Label Groups	Total number of label groups	8,000	10,000
(total_label_groups)			

Object	Description	Soft Limit	Hard Lim- it
Label Group members	Total number of labels in a label group, including nested label groups	8,000	10,000
(label_group_members)	For example, you have label groups A and B, and each group contains 1000 labels. Label group C contains label groups A and B. The total number of label_group_members in C is 2002 (1000 + 1000 + 2). Every nested label group and all its members are counted in the object limit.		
IP List entries	Total number of all IP list entries in all IP lists in the system	8K	10K
<pre>(total_ip_list_entries)</pre>			
Interfaces per Unmanaged Workload	Total number of network interfaces supported per unmanaged workload	102	128
(interfaces_per_unman-aged_workload)	An unmanaged workload does not have a VEN installed on it.		
Interfaces per VEN	Total number of interfaces supported per managed workload	32	None
(interfaces_per_agent)	A managed workload has a VEN installed on it.		(-1)
Items per Rule	Total number of items allowed per rule in the Providers and Consumers fields.	50	200
(total_actors_per_rule)	A rule contains labels, workloads, and IP lists. When you have a rule that has two Provider items and two Consumer items, the rule has 4 items.		
Pairing Keys (active)	Total number of active pairing keys	1200	5K
(total_active_pairing_keys)	A pairing key is active when you create a pairing profile, click <b>Start Pairing</b> , and generate the key.		
	When you click <b>Stop Pairing</b> , the pairing key becomes inactive and is no longer counted in the object limit.		
Pairing Profiles	Total number of pairing profiles	1200	5K
(total_pairing_profiles)			
RBAC Permissions	Total number of RBAC permissions	10K	35K
(total_org_permissions)	Each RBAC permission is a three tuple of an RBAC user or user group, role, and scope.		
Policy Services	Total number of services that you have added to the PCE and provisioned to use in rules	10K	None (-1)
(total_policy_services)			

Object	Description	Soft Limit	Hard Lim- it
Port ranges per Policy Service	Total number of port ranges per service	50	None (-1)
<pre>(port_ranges_per_poli- cy_service)</pre>			
Services per Rule	Total number of services that can be associated with a single rule	40	50
(total_services_per_rule)			
Ports per Rule  (total_serv- ice_ports_per_rule)	Total number of ports that can be associated with a single rule. Each service has a certain number of ports or port ranges. Note that in this instance, "service" refers not to a proper service or virtual service as such, but to a port representing a service. This means that this ob-	400	500
	ject limit governs your adding a distinct port or port range to a rule.		
Rules	Total number of all rules in all rulesets	40K	50K
(total_rules)			
Scopes and Rules	Sum of the total number of rules times the total number of scopes in all rulesets	40K	50K
(total_scopes_rules)			
	For example, you have two rulesets: RuleSet1 (2 rules, 3 scopes) and RuleSet2 (2 rules, 1 scope). In this example, the total number of scopes and rules is (2 x 3) + (2 x 1) = 8.		
Total stateless Rules	The total number of stateless rules in your organization	80	100
(total_stateless_rules)			
RBAC Users and Groups	Total number of all RBAC users and groups	1600	2000
<pre>(total_org_auth_securi- ty_principals)</pre>			
Adaptive User Segmentation (AUS) users	Total number of Adaptive User Segmentation (AUS) users used in rules	45K	50K
(total_security_principals)			
Service Bindings	Total number of service bindings created between workloads and virtual services	90K	100K
(total_service_bindings)			
Services per VEN	Total number of services on a managed work- load that the VEN reports to the PCE	160	200
(services_per_agent)	When you add more than 200 services to a managed workload, the PCE ignores any services over the 200 limit.		

Object	Description	Soft Limit	Hard Lim- it
Workloads	Total number of managed and unmanaged workloads	SNC: 200	SNC: 250
(total_workloads)	A managed workload has a VEN installed on it, and unmanaged workloads do not.	2x2 (small): 10,000	2x2(small): 12,500
		2×2:	2x2: 50,000
		40,000	4x2: 125,000
		4x2: 100,000	
User sessions (total_active_sessions)	Maximum number of user sessions on a single PCE cluster at the same time. This limit includes only actual logged-in user sessions, and omits impersonated sessions, such as scheduled jobs that log in to access PCE data.	100	125
	When the limit is exceeded, anyone who tries to log in is refused with an explanatory message.		

# **Monitor and Diagnose PCE Health**

This section describes monitoring the PCE to ensure it is operating correctly. You can view events generated by the PCE, read PCE logs, and generate reports about PCE activity.

## **PCE Logs**

Most PCE logs are written to syslog, but some are written directly to a file in the directory you specify with the log\_dir parameter in the PCE runtime\_env.yml file.

## **Log Files for PCE Services**

This table lists the primary PCE services and the log file name or the syslog filter for the service.

PCE Service	Syslog Filter Rule or Log File Name
agent_service	<pre>program("illumio_pce/agent")</pre>
agent_background_worker_service	
agent_traffic_redis_cache	<pre>program("illumio_pce/agent_traffic")</pre>
agent_traffic_redis_server	
agent_traffic_service	
auditable_events_service	<pre>message('"category":"auditable"');</pre>

PCE Service	Syslog Filter Rule or Log File Name
collector_service	<pre>program("illumio_pce/collector");</pre>
database_monitor	<pre>program("illumio_pce/database_monitor");</pre>
database_servicedata- base_slave_service	<pre>program("illumio_pce/postgresql");</pre>
ev_service	<pre>program("EventService");</pre>
executor_service	<pre>program("illumio_pce/executor");</pre>
fileserver_service	<pre>program("illumio_pce/fileserver");</pre>
fluentd_source_service	<pre>program("illumio_pce/fluentd");</pre>
ilocron	<pre>program("illumio_pce/ilocron");</pre>
login_service	<pre>program("illumio_pce/login");</pre>
memcached	<pre>program("illumio_pce/memcached");</pre>
node_monitor	<pre>program("illumio_pce/system_health");</pre>
redis	<pre>program("redis");</pre>
search_index_service	<pre>program("illumio_pce/search_index");</pre>
server_load_balancer	<pre>program("haxproxy");</pre>
	HAProxy logs to /dev/log using a datagram socket. When using syslog-ng, you might need to update your syslog-ng configuration to listen on /dev/log on a datagram socket.
service_discovery_service	<pre>program("illumio_pce/service_discovery");</pre>
	<pre>program("consul");</pre>
web_server	<pre>match("nginx;" value("MESSAGE"));</pre>

## Log Files (Non-syslog)

The following PCE log files are written to the value defined in the log\_dir parameter of the runtime configuration file.

- agent\_background\_worker\_0.log
- cache\_0\_master.log
- consul.log
- config\_manager
- fileserver.3400.log
- fluentd-source.log

- ilo\_node\_monitor.log
- nginx\_error.log
- passenger.log
- pce\_error.log
- pg listener.log
- set\_server\_0\_master.log
- system\_history.log
- thin\_agent\_traffic.3200.log
- thin\_collector.3100.log
- thin\_login.3300.log
- thin\_search\_engine.3500.log
- tmessenger/compact.log
- tmessenger/heartbeat.log
- tmessenger/relay.log
- traffic\_0\_master.log
- traffic\_worker\_0.log
- traffic\_worker.log

In addition, the PCE software writes system stats to the following two files in the log\_dir/systats directory every 10 minutes:

- perflog
- app\_stats



#### **CAUTION**

Do not delete these files. They contain helpful system and application statistics that can help Illumio Customer Support troubleshoot PCE operational issues.

#### **System Upgrade Log**

On each PCE node, the log\_dir directory contains a log file called system\_history that records the following information:

- Initial PCE version
- PCE version upgrades (old version and new version)
- PCE backups (how many times the PCE software on the node has been backed up)
- PCE restores with the timestamp of the backup that was restored
- · A timestamp for each log entry indicating when the operation occurred

Example system upgrade log:

```
2016-09-24 05:04:11.216: Change in PCE software version detected. Previous: 16.6.0-4114, Current: 16.9.0-4121.
2016-09-24 05:04:39.583: Data dump to file
'/tmp/illumio_pce_data/db_backup.tar.gzip' started.
2016-09-24 05:04:47.950: Data dump to file
'/tmp/illumio_pce_data/db_backup.tar.gzip' completed. MD5
checksum: 02cef311e9657710a1900d8c5deb49d9
```

### **Password-related Event Logging**

The system records auditable events for the following occurrences:

- When an Illumio administrator changes the password requirements
- When users successfully change their passwords as required by password policy
- When users fail to change their passwords according to required password policy

## **Search the PCE Log Files**

The PCE Support Report search function allows you to search PCE log files (log files written to /var/log/illumio-pce) based on the following criteria:

- From (timestamp) & To (timestamp): Search between two specific points in time.
- From (timestamp) & Duration (hours): Search a duration of time starting at a specific point in time.
- **Duration (hours) & To (timestamp):** Search for a duration of time up to a specific point in time.
- **Duration (hours) & At (timestamp):** Search for something that occurred during a general time frame and gather logs from before and after the event; (timestamp) is the midpoint.
- From (timestamp) + Search term: Search from a starting time for specific types of information using the standard search terms.

### **Examples of Searching**

The following examples use questions to frame the log search goals and help formulate your searches.

### From/To Dates

Question:

"I want to search 12 hours worth of PCE logs starting on February 1, 2020 and ending 12 hours after (from midnight on 2/1 to noon 2/1)."

Search syntax:

```
$ sudo -u ilo-pce ./support_report logs from=02/01/2020 to=02/02/2020
$ sudo -u ilo-pce ./support_report list
```

#### **Duration/To**

Question:

"I want to search for 6 hours worth of PCE logs ending on midnight of February 2, 2020. Effectively from 1800 on February 1 through 0000 on February 2, 2020."

The default value of hours in a date is midnight.

Search syntax:

```
$ sudo -u ilo-pce ./support_report logs duration=6 to=02/02/2020
$ sudo -u ilo-pce ./support_report list
```

#### At/Duration

Explanation: Use the "at" operator in conjunction with the "duration" operator in the following example. To find details for a specific event that occurred at a known time, use "at." "At" is the approximate time at which an event of interest occurs. The duration is the time range on either side of this timestamp. In this example, duration returns all messages between 10:00:15 and 12:00:15 on February 2, 2020 and "at" narrows the search to a more specific time, in this case, 11:00AM.

#### Question:

"I want to search a time window between the hours of 10:00AM and 12:00PM.on February 2, 2020, for a specific event that occurred at 11:00AM."

Search syntax:

```
$ sudo -u ilo-pce ./support_report logs at=02/02/2020T11:00:15 duration=2
$ sudo -u ilo-pce ./support_report list
```

#### From + Search Term Included

Question:

"I want to see all PCE logs entries starting from February 2, 2020, until the present that refer to JOB STORE."

Search syntax:

```
$ sudo -u ilo-pce ./support_report from=02/02/2020 include=JOB_STORE
$ sudo -u ilo-pce ./support_report list
```

#### From + Search Term Included and Excluded

Question:

"I want to see all PCE logs entries starting from February 2, 2020, until the present that refer to JOB\_STORE and timed\_work but for all servers excluding core0."

Search syntax:

```
$ sudo -u ilo-pce ./support_report from=02/02/2020 include=JOB_STORE
include=timed_work exclude=core0
$ sudo -u ilo-pce ./support_report list
```

### **Monitor PCE Health**

This section describes how to monitor the health of the PCE.

## **PCE Health Monitoring Techniques**

You can monitor the PCE software health using the following methods:

- **PCE web console:** The Health page in the PCE web console provides health information about your on-premises PCE, whether you deployed a 2x2 cluster, 4x2 cluster, or SNC.
- REST API: The PCE Health API can be used to obtain health information.
- **Syslog:** When you configure syslog with the PCE software, the PCE reports system health messages to syslog for all nodes in the PCE cluster.
- PCE command-line reference: Run commands to obtain health status for the entire PCE cluster and each node in the cluster.

## **Minimum Required Monitoring**

The PCE provides several different methods you can use to monitor PCE health, as described in PCE Health Monitoring Techniques [138].

No matter which technique you use, there is one main signal that it is important to watch for: the overall system status. You must monitor it as follows:

- If you are using the PCE web console, keep an eye on the **PCE Health** status near the top of the page. It indicates whether the PCE is in a Normal, Warning, or Critical state of health. For details, see Health Monitoring Using PCE Web Console [139].
- If you are using the API, similarly, monitor the status field. For details, see Health Monitoring Using Health REST API [140].
- If you are using the PCE syslog to monitor PCE health, watch for any messages that contain the text sev=WARN or sev=ERR. In such messages, check the other fields for details. For more details, see Health Monitoring Using Syslog [140].

The rest of this section provides details about the meaning of the various PCE health metrics and what to do if a warning or error state is seen.

#### **PCE Health Status Codes**

The following table lists the status shown in the PCE web console (or PCE Health API), the severity code shown in syslog, the corresponding color code in the PCE web console, and the most commonly encountered causes for each level of health.

Status/ Severity	Color	Typical Meaning
Normal (healthy) or sev=INFO	Green	<ul> <li>All required nodes and services are running.</li> <li>CPU usage, memory usage, and disk usage of all nodes is less than 95%, and all other metrics are below their thresholds.</li> <li>Database replication lag is less than or equal to 30 seconds.</li> <li>(In a PCE Supercluster only) Supercluster replication lag is less than or equal to 120 seconds.</li> </ul>

Status/ Severity	Color	Typical Meaning
Warning or sev=WARN	Yellow	<ul> <li>One or more nodes are unreachable.</li> <li>One or more optional services are missing, or one or more required services have been degraded.</li> <li>The CPU usage, memory usage, or disk usage of any node is greater than or equal to 95%, or another health metric has exceeded its warning threshold.</li> <li>Database replication lag is greater than 30 seconds.</li> <li>(In a PCE Supercluster only) Supercluster replication lag is greater than 120 seconds.</li> </ul>
Critical or sev=ERR	Red	<ul><li>One or more required services are missing.</li><li>A health metric has exceeded its critical/error threshold.</li></ul>

If a warning threshold has been exceeded, a warning icon appears in three places in the PCE web console: the upper right of the PCE Health dashboard, the General summary area of the dashboard, and next to the appropriate tab.

## **Health Monitoring Using PCE Web Console**

Click the Health icon at the top of the PCE web console to see the general health of the PCE.

Tabs categorize the health information by Node, Application, Database Replication, and Supercluster.

The Node tab shows node information, including the health metric Disk Latency. It also displays a hardware requirements message for each node, to tell whether the hardware provisioned meets the requirements.

If a node is found to have sufficient resources to meet specifications, the message "Node Specs Meet requirements" appears with a green checkmark. If the node does not have sufficient resources to meet the required specifications, the alert "Node Specs Do not meet requirements" appears with a yellow triangle. The requirements vary depending on the type of PCE cluster (single-node, 2x2 multi-node, 4x2 multi-node, etc.). This is determined based on the cluster\_type runtime parameter, which is set for every node. The hardware requirements check needs to know the cluster type so it can use the right set of hardware requirements.

The Application tab shows a variety of information, including database health metrics.

The tab is divided into sections:

- Collector Summary (flow rate, success vs. failure rates)
- Traffic Summary (ingestion, backlog, database utilization)
- Policy Database Summary (database size, transaction ID age, vacuum backlog)
- VEN Heartbeat (success vs. failure, latency)
- VEN Policy (request rate, latency)

The Database Replication tab shows the database replication lag.

The Supercluster tab shows the Supercluster replication lag (applicable only in a PCE Supercluster).

#### **PCE Health Status Indicator**

The PCE web console provides an indicator that reflects overall status. Near the top of the PCE Health page in the PCE web console, a warning indicator labeled **PCE Health** shows normal, warning, or critical. You can find more details on the tab that corresponds to the issue.

### **Health Monitoring Using Health REST API**

With the PCE Health API, you can display PCE health information using the following syntax:

```
GET [api_version]/health
```

For details, see PCE Health in REST API Developer Guide.

### **Health Monitoring Using Syslog**

Each PCE node reports its status to the local syslog daemon once every minute. The PCE uses the program name illumio\_pce/system\_health for these messages.

#### **Example Syslog Messages**

Example syslog message from a non-leader PCE node:

```
2015-12-17T00:40:31+00:00 level=info host=ip-10-0-0-26 ip=127.0.0.1 program=illumio_pce/system_health| sec=312831.757 sev=INFO pid=9231 tid=12334020 rid=0 leader=10.0.24.26 database_replication_lag=3.869344 cpu=2% disk=11% memory=19%
```

Example syslog message from a leader PCE node for a healthy PCE cluster:

```
2015-12-23T22:52:59+00:00 level=info host=ip-10-0-24-26 ip=127.0.0.1 program=illumio_pce/system_health| sec=911179.836 sev=INFO pid=5633 tid=10752960 rid=0 cluster=healthy cpu=2% disk=10% memory=37%
```

Example syslog message from a leader PCE node for a degraded PCE cluster with one node missing:

```
2015-12-23T22:56:00+00:00 level=notice host=ip-10-0-24-26 ip=127.0.0.1 program=illumio_pce/system_health| sec=911360.719 sev=WARN pid=5633 tid=10752960 rid=0 cluster=degraded missing=1 cpu=34% disk=10% memory=23%
```

### **Health Monitoring Using PCE Command Line**

This section gives several techniques you can use at the command line to monitor PCE health.

#### **Monitor a PCE Cluster**

The following command displays the status of the PCE cluster, including where each individual service is running:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-status
```

Return codes:

- 0 NOT RUNNING
- 1 RUNNING
- 2 PARTIAL (not all required services running)

For example:

```
$ ./illumio-pce-ctl cluster-status
SERVICES (runlevel: 5)
                           NODES (Reachable: 4 of 4)
_____
agent_background_worker_service 10.0.26.49 10.0.6.171
                                           10.0.6.171
                            10.0.26.49
agent_service
agent traffic redis cache
                                           10.0.25.197
                             10.0.11.96
agent_traffic_redis_server
                            10.0.25.197
agent_traffic_service
                            10.0.26.49
                                           10.0.26.49
10.0.6.171 10.0.6.171
                                           10.0.6.171
auditable_events_service
                             10.0.26.49
collector_service
                             10.0.26.49
                                           10.0.26.49
10.0.6.171 10.0.6.171
database monitor
                            10.0.11.96
                                           10.0.25.197
                            10.0.25.197
database_service
database_slave_service
                             10.0.11.96
ev_service
                            10.0.26.49
                                           10.0.6.171
                            10.0.26.49
                                           10.0.6.171
executor service
                            10.0.25.197
fileserver_service
fluentd source service
                             10.0.26.49
                                           10.0.6.171
                                           10.0.6.171
login_service
                             10.0.26.49
memcached
                             10.0.26.49
                                           10.0.6.171
node monitor
                             10.0.11.96
                                           10.0.25.197
10.0.26.49 10.0.6.171
pg_listener_service
                             10.0.11.96
search_index_service
                            10.0.26.49
                                           10.0.6.171
server_load_balancer
                            10.0.26.49
                                           10.0.6.171
service_discovery_agent
                            10.0.25.197
service_discovery_server
                             10.0.11.96
                                           10.0.26.49
                                                          10.0.6.171
set_server_redis_server
                            10.0.11.96
traffic_worker_service
                            10.0.26.49
                                           10.0.6.171
                                          10.0.6.171
web server
                             10.0.26.49
```

This command displays the members of the PCE cluster:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-members
```

For example:

```
[illumio@core0 illumio-pce]$ ./illumio-pce-ctl cluster-members

Reading /var/illumio-pce/data/runtime_env.yml.

Node Address Status Type

core0.mycompany.com 10.6.1.19:8301 alive server

data0.mycompany.com 10.6.1.20:8301 alive server

core1.mycompany.com 10.6.1.32:8301 alive server

data1.mycompany.com 10.6.1.31:8301 alive client
```

#### **Monitor Database Replication**

On either data node, run the following command to display the status of replication between the primary database and replica:

```
$ sudo -u ilo-pce illumio-pce-db-management show-replication-info
```

The PCE updates this information every two minutes.



#### **IMPORTANT**

To prevent data loss during a database failover operation, monitor the PCE databases for excessive database replication lag.

For example:

```
$ ./illumio-pce-db-management show-replication-info
Reading /var/illumio/data/runtime_env.yml.
INSTALL_ROOT=/var/illumio/software
RENV=development
Current Time: 2016-02-16 22:42:03 UTC
Master: (10.6.1.73)
Last Sampling Time : 2016-02-16 22:41:14 UTC
Transaction Log location: 0/41881E8
Slave(s):
IP Address: 10.6.1.72
Last Sampling Time : 2016-02-16 22:41:16 UTC
Streaming : true
Receive Log Location: 0/41881E8
Replay Log Location: 0/4099048
Receive Lag (bytes): 0
Replay Lag (bytes): 979360
Transaction Lag (secs): 4.633377
Last Transaction Replayed Time: 2016-02-16 22:37:12.920179 UTC
```

## **PCE Health Troubleshooting**

This section tells what action to take if you see a non-normal status when monitoring PCE health. The recommended response depends on which metric has departed from the Normal state. If you are not able to diagnose and fix it yourself, contact Illumio Support.

The health metrics may occur in the PCE web console, API response status field, or in the syslog severity field. When multiple conditions result in differing levels of severity, the more critical level is reported. If you receive a non-normal level for any of the following, here are the suggested actions to take. For additional details, see PCE Health Metrics Reference [146].

Name	Troubleshoot
Disk Laten- cy	Warning/Critical: Disk latency on data nodes is an indication that DB/Traffic service needs to be investigated further for possible performance issues. Typically higher disk latency numbers indicate Disk I/O bottlenecks.
CPU	When the PCE is under heavy load, CPU usage increases, and the Warning status is reported. Typically, the load should decrease without intervention in less than 20 minutes. If the Warning condition persists for 30 minutes or more, decrease the load on the CPU or increase capacity.
Memory	When the PCE is under heavy load, memory usage increases, and the Warning status is reported. Typically, the load should decrease without intervention in less than 20 minutes. If the Warning condition persists for 30 minutes or more, increase the available memory.
Disk Space	The PCE manages disk space using log rotation, and this is usually sufficient to address any Warning condition. If the Warning level persists for more than one day, and the amount of disk space consumed keeps increasing, notify Illumio Support.
Policy Da- tabase Summary	<ul> <li>disk_usage (database disk utilization): Warning: Plan to increase the capacity of the disk partition holding the Policy DB or make more room by deleting unnecessary data as soon as possible. Critical: Immediately increase the disk partition holding the Policy DB or make more room by deleting unnecessary data.</li> <li>txid_max_age (transaction ID maximum age): Warning: Contact Illumio Support and plan a manual full vacuum as soon as possible. Critical: Immediately contact Illumio Support.</li> <li>vacuum_backlog (vacuum backlog): Warning, Critical: If the situation persists, contact Illumio Support so that the reason for the underperformance of the auto-vacuum can be investigated.</li> </ul>
VEN heart- beat per- formance	<ul> <li>avg_latency, hi_latency (latency): If the VEN heartbeat latency is high, examine the application logs on core nodes and system resource utilization across the entire PCE cluster. IOPS-related issues may often be diagnosed by examining database logs and observing long wait times for committing database transactions to disk. </li> <li>rate, result (response stats): Warning/Critical: Examine the application logs on core nodes for more information about the precise cause of the failure.</li> </ul>
Policy per- formance	<ul> <li>avg_latency, hi_latency (latency): If latency is abnormally high, investigate the cause. For example, examine the logs to try to find out why the policy is changing.</li> <li>rate (request count): If abnormally large, investigate the cause (see latency). The default threshold is conservative by design. Each organization has its own expected rate of change of VEN policy, so there is no universal correct warning threshold. You can modify the threshold to better match expectations (see Configurable Thresholds for Health Metrics [144]). If the number of VEN policy requests is too high, examine application logs to find the reasons for the policy changes, and determine whether the policy changes are expected.</li> </ul>
Collector summary	<ul> <li>Flow summaries rate, node: A 4x2 PCE cluster is configured to handle approximately 10,000 flow summaries per second by default. If fewer posts are reported and you see a large number of failed posts, the collector count can be increased with help from Illumio Support.</li> <li>Success rate, node: This metric is informational. However, if counts differ across core machines, ensure intra-PCE latency is within the 10ms limit.</li> <li>Failure percentage ratio, node: On startup, or when connections are reestablished, VEN post rates can overwhelm the PCE, causing it to reject posts. This is normal unless persistent. If this ratio is large, or if the value is consistent and large (0.1), it means VENs may not be able to upload flow data, and they will start dropping after 24 hrs. The solution is usually to add more collectors.</li> </ul>

Name	Troubleshoot
Traffic summary	<ul> <li>Ingest rate, node:     A 4x2 PCE cluster is configured to handle approximately 10,000 flows per second by default. If this rate is exceeded, and a backlog begins to grow, the PCE will eventually prune the backlog and lose data. Adding additional flow_analytics daemons will distribute the work, but eventually PostgreSQL itself could become the bottleneck, requiring the use of DX.</li> <li>Backlog size, node:     If the size of the backlog increases continuously, this indicates performance issues with the flow analytics service which processes the flows in the backlog. Contact Illumio support if the backlog exceeds the safe threshold.</li> <li>Backlog Disk Utilization:     Increasing values indicate that the buffered new flow data is growing, meaning the PCE is unable to keep up with the rate of data posted. The PCE collector flow summary rate and PCE traffic summary ingest rate need to be to be roughly equal, or this buffered backlog will grow.</li> </ul>
Database Replication Lag	Warning: Check whether the PCE is running properly, and verify that there is no network issue between the nodes. If the replication lag keeps increasing, contact Illumio Support.
Superclus- ter Replica- tion Lag	Warning: Check whether all PCEs are running properly, and verify that there is no network issue between the lagging PCEs. If the replication lag keeps increasing, contact Illumio Support.

### **Configurable Thresholds for Health Metrics**

You can configure the thresholds that define the normal, warning, and critical status for each health metric. Each health metric has predefined thresholds for normal (green), warning (yellow), and critical (red). You can use the command illumio-pce-env metrics --write to adjust these thresholds. This command can be used to modify any Boolean, number, float, or string, or array of these types (no nested arrays). For example:

illumio-pce-env metrics --write CollectorHealth:failure\_warning\_percent=15.0

After setting the desired threshold values, copy /var/lib/illumio-pce/data/illumio/metrics.conf to every node in the cluster to ensure consistent application of the thresholds.



### NOTE

Key and value pair for lag for policy and traffic databases is:



#### NOTE

policy\_database\_replication\_lag=x seconds



#### NOTE

traffic\_database\_replication\_lag=x seconds

Examples of when you might want to use this feature:

- At a larger installation, the default memory threshold is set to 80%, but memory usage
  routinely spikes to 95%. Every time the memory utilization exceeds the threshold, the PCE
  Health page displays a warning. By configuring a higher threshold, you can reduce the
  frequency of warnings.
- Database replication lag can exceed a threshold for a brief time, raising a warning, but the system will catch up with replication after some time. To reduce these warnings, you can configure a longer time period for database replication lag to be tolerated. Note: This is not the same as configuring the threshold of the replication lag itself, but the permissible period of time for the lag to be non-zero.
- The default thresholds might be acceptable when the PCE is first installed, but as more VENs are paired to the PCE over time, the default thresholds might need adjustment.

To set health metrics thresholds:

1. Run the following command to get a list of the available metrics, their current settings, and the thresholds you can modify:

#### illumio-pce-env metrics --list

#### Example output:

Engine		Param	Value	Default
CollectorHealth	failure_warnin	.g_percen	t	10.0
fa	ilure_critical_percent		20.0	
su	mmary_warning_rate		12000	
su	mmary_critical_rate		15000	
DiskLatencyMetric				
FlowAnalyticsHealth	backlog_warnin	g_percen	t	10.0
ba	cklog_critical_percent		50.0	
su	mmary_warning_rate		12000	
su	mmary_critical_rate		15000	
PolicyDBDiskHealthM	etric			
PolicyDBTxidHealthM	etric			
PolicyDBVacuumHealt	hMetric			
PolicyHealth				
TrafficDBMigratePro	gress			

If nothing appears in the Param column for a given metric, you can't modify the thresholds for that metric. This example output shows that the Collector Health metric has four thresholds you can modify.

2. Run the following command:

```
illumio-pce-env metrics --write MetricName:threshold_name=value

For
MetricName
,
threshold_name
, and
value
, substitute the desired values. For example:
```

```
illumio-pce-env metrics --write
CollectorHealth:failure_warning_percent=15.0
```

- NOTE: Do not insert any space characters around the equals sign (=).
- **3.** Copy /var/lib/illumio-pce/data/illumio/metrics.conf to every node in the cluster. The path to metrics.conf might be different if you have customized persistent\_data\_root in runtime\_env.yml.
- 4. Restart the PCE.
- **5.** When a metrics configuration is detected, the PCE loads and applies it. In ilo\_node\_mon-itor.log, you should see a message like "Loaded metric configuration for *MetricName*."

The metrics command provides other options as well. This section discussed only the most useful ones. For complete information, run the command with the -h option to see the help text:

illumio-pce-env metrics -h

## **PCE Health Metrics Reference**

The health metrics consist of a set of key value pairs. The following table describes the possible keys that can appear.

Cate- gory	Key	Description	Severity Levels
Disk Space	<pre>disk,  disk_space_per- cent thresholds.</pre>	The PCE node reports disk space for the PCE application directories (configured in the runtime_env.yml file):	Default: The following thresholds trigger the following severity levels:
	disk_inode_per- cent_thresholds	<ul> <li>ephemeral_data_root</li> <li>runtime_data_root</li> <li>log_dir</li> <li>persistent_data_root directories</li> </ul> When all these directories are on a single mount point, the node reports: disk=n%	<ul> <li>NOTICE: disk_space</li> <li>&gt;= 90% or disk_ino-des &gt;= 90%</li> <li>WARNING: disk_space &gt;= 95% or disk_inodes &gt;= 95%</li> </ul>
		When multiple mount points exist, the node reports the first discovered path by name, such as:  ephemeral_data_root=n%	These default thresholds can be modified using disk_space_percent_thresholds or disk_inode_percent_thresholds.
		log_dir=n%  When the PCE encounters an error determining this information, the node reports: disk=?.	The disk space value is only reported when one of the conditions above is met; otherwise, it reports only disk space. When a node has multiple disk mounts, the
		disk_space_percent_thresholds consists of two values that determine the disk space usage percentages that result in NOTICE or WARNING notifications.	message might look like:  ephemeral_da- ta_root_inodes=n, etc.
		disk_inode_percent_thresholds consists of two values that determine the disk inode usage percentages that result in NOTICE or WARNING notifications.	

Cate- gory	Key	Description	Severity Levels
Physical Memory	memory,	Each PCE node reports basic physical memory usage, indicated as:	Default: the following values trigger the following severity levels:
	cent_thresholds	memory=n%  memory_percent_thresholds consists of two values that determine the memory usage percentages that result in NOTICE or WARNING notifications.	<ul> <li>NOTICE: memory &gt;= 80%</li> <li>WARNING: memory &gt;= 95%</li> <li>These default thresholds can be modified using memory_percent_thresholds.</li> </ul>
CPU Load	<pre>cpu, cpu_max_percent,</pre>	Each PCE node reports CPU usage load as cpu=n%. The CPU load is calculated as a percentage between two time slices and represents CPUs of all nodes in the	Default: the following values trigger the following severity levels:
	cpu_tolerance_seconds	cluster. For example, cpu=100% means all cores are maximized. A notification (NO-TICE or WARNING) is issued when the CPU load exceeds a given percentage for a given amount of time.	<ul> <li>NOTICE: cpu &gt;= 95% for more than 1 minute</li> <li>WARNING: cpu &gt;= 95% for more than 5 minutes</li> </ul>
		cpu_max_percent is the CPU usage percentage above which the notification timer begins.  cpu_tolerance_seconds controls the notification timer. It consists of two values that determine how long the CPU is above the maximum usage percentage before a NOTICE or WARNING occurs.	These default thresholds can be modified using cpu_max_percent and cpu_tolerance_seconds.
Cluster Leader	leader	The IP address of the current leader, or unavailable when no leader exists or it is unreachable.	
Cluster Status	cluster	The overall health of the cluster, reported by the leader only:	These status values trig- ger the following severi- ty levels:
		<ul> <li>cluster=healthy: Everything is operating properly and all PCE services are running.</li> <li>cluster=degraded: The cluster is running but has unhealthy nodes.</li> <li>cluster=down: The cluster is missing a required service &lt; 5 minutes.</li> <li>cluster=failed: The cluster is missing a required service for &gt;= 5 minutes.</li> </ul>	<ul> <li>NOTICE: cluster=de-graded (&lt;2 minutes)</li> <li>WARN: cluster=de-graded (&gt;=2 minutes)</li> <li>WARN: cluster=down (&lt;2 minutes)</li> <li>ERROR: cluster=down (&gt;= 2 minutes)</li> <li>FATAL: cluster=failed</li> </ul>
Missing Nodes	missing	The number of nodes that are missing from the cluster. If no nodes are missing, this metric is not reported.	

Cate- gory	Key	Description	Severity Levels
Replica- tion Lag	database_ replica- tion_ lag	The number of seconds the database replica is lagging behind the primary database. Output by database replica nodes only.	These thresholds trigger the following severity level:  • WARNING: >=30 seconds
Disk La- tency	<pre>policy_disk_laten- cy_milliseconds,  traffic_disk_laten- cy_milliseconds</pre>	(19.3.2 and later) Average time (in milliseconds) for I/O requests issued to the device to be served. This includes the time spent by the requests in queue and the time spent servicing them. The metric is calculated exactly the same way iostat calculates await.	<ul><li>Normal: &lt;= 300</li><li>Warning: &gt;300 &lt;800</li><li>Critical: &gt;= 800</li></ul>
		Values: delay (milliseconds), disk  Usefulness: Indicates Disk I/O, which is especially useful when the DB services are under heavy load.	
Policy Data- base: Size	policy_data- base_size_gb	(19.3.2 and later) Informational. Size of the Policy Database data directory. Provides an indication of disk space requirements of the Policy DB. Depending on size, reported in units of byte, kilobyte, megabyte, gigabyte, terabyte	
Policy Data- base: Disk Uti- lization	policy_database_uti- lization_percentage	(19.3.2 and later) Usage ratio of the disk partition holding the Policy DB. Conse- quences of the Policy DB running out of disk space can be critical.	<ul><li>Normal: &lt; 90</li><li>Warning: [90 - 95]</li><li>Critical: &gt;= 95</li></ul>
Policy Data- base: Transac- tion ID Max Age	policy_data- base_transac- tion_id_max_age	(19.3.2 and later)  Maximum transaction ID (TxID) age of the Policy DB. This does not apply to the Traffic DB. Indicates the risk of the DB running out of TxIDs, which could cause a DB lockdown requiring expensive recovery procedures. The PCE will attempt to automatically detect and recover before this occurs (requires reboot).	<ul> <li>Normal: &lt; 1 billion</li> <li>Warning: [1 billion - 2 billion]</li> <li>Critical: &gt;= 2 billion</li> </ul>
Policy Data- base: Vacuum Backlog	policy_database_vac- uum_backlog_percent- age	(19.3.2 and later) Percentage of vacuum-ready rows (a.k.a dead rows) over the total number of rows of the Policy database computed over a period of up to 12 hours. This does not apply to the Traffic DB. Indicates how well the auto-vacuum of DB is performing. If the percentage is persistently above Postgres default settings of about 20% of the total number of rows, it is an indication that the auto-vacuum is not working effectively.	Normal: < 40 Warning: 40 - 80 and current number of vacuum-ready rows is above Postgres default minimum to trigger vacuum (20% +50) Critical: >= 80 and current number of vacuum-ready rows is above Postgres default minimum to trigger vacuum (20% +50)

Cate- gory	Key	Description	Severity Levels
VEN Heart- beat Per- for- mance: Latency	ven_heartbeat_aver- age_latency_seconds,  ven_heart- beat_high_laten- cy_seconds	ven_heartbeat_average_latency_seconds is the average over the measurement time period.  ven_heartbeat_high_latency_seconds is the average 95% over the measurement time period.	<ul> <li>Warning: average &gt; 500ms</li> <li>Critical: average &gt; 5 sec</li> </ul>
		Backend processing time of VEN heart- beat requests. Does not include the time spent in the load balancer queues, as the queue time may be influenced by a num- ber of other external factors.	
		The VEN heartbeat uses the same PCE services and components as the policy computation and is therefore a good overall indicator for the health of the policy subsystem, including whether system resources are being overwhelmed. Historically, it has reliably indicated I/O and/or policy cache bottleneck(s).	
VEN Heart- beat Per- for- mance: Success	ven_heartbeat_suc- cess_count_per_hour	Active VENs send a heartbeat API request to the PCE approximately every 5 minutes. This metric captures the number of VEN heartbeat requests seen on the PCE in approximately the past hour. The count may be transiently inaccurate due to concurrent log rotation or other gaps in the application log files. If the PCE has just started up, this number is expected to ramp up over the first hour.	<ul> <li>Warning: for any non-2xx code, greater than 1% of total requests for the time window</li> <li>Critical: for any non-2xx code, greater than 20% of total requests for the time window</li> </ul>
		The number of successful VEN heartbeat requests per hour summed across all PCE core nodes should be approximately the number of VENs times 12 (heartbeats happen every 5 minutes per VEN). A low number of successful VEN heartbeats likely indicates issues with VEN connectivity or PCE performance. Depending on the VEN disconnect/offline settings, a low VEN heartbeat success rate may cause traffic to be dropped to/from enforced workloads.	
VEN Heart-	ven_heartbeat_fail- ure_percent,	(19.3.2 and later)	Warning: 5%
beat Per- for- mance: Failure	ven_heartbeat_fail- ure_count_per_hour		Critical/Error: 20%

Cate- gory	Key	Description	Severity Levels
Policy Perform- ance: La- tency	ven_policy_aver- age_latency_seconds,  ven_policy_high_la- tency_seconds	(19.3.2 and later) (milliseconds)  Average response time for policy. Latency indicates policy complexity and system load/bottlenecks. This metric captures the backend processing time of VEN policy requests. It does not include the time spent in the load balancer queues, as queue time may be influenced by a number of other external factors.	<ul> <li>Warning: average &gt; 10 sec</li> <li>Critical: average &gt; 30 sec</li> </ul>
		The cost to compute the VEN policy instructions depends on a large number of factors, including but not limited to the rate of change in the environment, the number of rules, the number of actors (workloads, labels, etc.) used in the rules, and the density of desired connectivity between workloads. Abnormally high VEN policy request latency may indicate issues with inadequate system resources, policy changes that result in higher than intended policy complexity, or an abnormally high rate of change to the workload context.	
Policy Perform- ance: Re- quest Count	ven_policy_re- quest_count_per_hour	When a new policy is provisioned or the workload context (IP address, label membership, etc.) is changed on the PCE, policy instructions are sent to affected VENs. This metric captures the number of VEN policy requests seen on the PCE in approximately the past hour. The count may be transiently inaccurate due to concurrent log rotation or other gaps in the application log files. When a PCE first starts or is restarted, this number may increase sharply over a short time period as every VEN checks to ensure policy sync.	Warning: > 1M req/ hour
		The VEN policy request rate provides an indicator of the rate of policy change across the organization, and therefore, an estimate of the load on the PCE. VEN policy requests are sometimes more expensive to process than other API requests, and frequent policy changes may result in decreased overall performance and longer policy convergence times. Frequent policy changes may also be a symptom of underlying network or infrastructure issues, such as (but not limited to) frequent IP address changes or improperly cloned VENs.	
Collector: Flow Summa- ries	collector_summa- ries_per_second	(19.3.2 and later) Total flow summaries processing rate for a single core PCE node, over the last hour. The sum of these should roughly match the flow summary ingest rate, or the PCE will show an increasing backlog size.	<ul><li>Warning: &gt; 12,000</li><li>Critical: &gt; 15,000</li></ul>

Cate- gory	Key	Description	Severity Levels
Collector: Success	collector_post_suc- cess_count_per_hour	(19.3.2 and later)	
Rate		Informational. Total flow summary posts accepted by a core machine over the last hour. Posts can be of different sizes, so take longer to process, but you should see roughly the same rates for each core.	
		If counts differ across core machines, ensure intra-PCE latency is within the 10ms limit.	
Collector: Failure	collector_post_fail- ure_count_per_hour	(19.3.2 and later)	
Rate		Informational. Total flow summary failure rate over the last hour.	
		Under normal operational circumstances, this value should be approximately the same for all core nodes.	
Collector: Failure Percent- age	collector_post_fail- ure_percentage	(19.3.2 and later) Failure/total. Failure rate / success ratio over the last hour.	<ul><li>Warning: &gt; 10%</li><li>Critical: &gt; 20%</li></ul>
Traffic Summa- ry: Ingest	traffic_summa- ries_per_second, total_traffic_summa- ries_per_second	(19.3.2 and later) The mean rate at which flow summaries are added to the post- gresql database over the last hour.	<ul><li>Warning: &gt; 12,000</li><li>Critical &gt; 15,000</li></ul>
Traffic Summa- ry: Data- base Size	traffic_data- base_size_gb, traffic_data- base_size_days	(19.3.2 and later) Informational. (gigabytes; days)	
Traffic Summa- ry: Data- base Size: % of Allocated	traffic_database_uti- lization_percentage	(19.3.2 and later) Informational. The system is behaving normally even if it is near or at configured disk limits. The oldest flows will be dropped to enforce the limit, however, which may not be desirable.	<ul><li>Warning: &gt; 10%</li><li>Critical: &gt; 50%</li></ul>
Traffic Summa- ry: Back- log Size	traffic_back- log_size_gb	(19.3.2 and later) Amount of flows in the backlog that are not in the traffic database, in gigabytes. If the backlog size exceeds a certain limit (default is 10 GB and can be set in runtime environment), flows get dropped.	
Traffic Summa- ry: Back- log Disk Utiliza- tion	traffic_backlog_uti- lization_percentage	(19.3.2 and later) Increasing values indicate that the buffered new flow data is growing, meaning the PCE is unable to keep up with the rate of data posted. The PCE collector flow summary rate and PCE traffic summary ingest rate need to be to be roughly equal or this buffered backlog will grow.	<ul><li>Warning: &gt; 10%</li><li>Critical: &gt; 50%</li></ul>

Cate- gory	Key	Description	Severity Levels
Super- cluster Replica- tion Lag		(For PCE superclusters only) Number of seconds since a replication event generated by a PCE was processed on another PCE. The supercluster replication engine relies on events to ensure data gets replicated. These are not the same as the PCE audit events.  An increasing replication lag usually indicates some issue with the PCE replication engine or network connectivity. The larger the replication lag, the longer it may take a PCE to catch up with other regions once the underlying issue is addressed.	• Warning: This is an indication that the interpce data replication is not working as intended. One or more PCEs may not have the data generated by one or more other PCEs. The supercluster expects that the replication lag will not fall behind by a large margin. If it does, the user may lose some data if the PCE that is ahead fails and is not recoverable.

# **Support Reports for PCE**

To help Illumio troubleshoot issues with your PCE, you can generate support reports to send to Illumio Customer Support. There are two ways to generate support bundles: in the web console or at the command line. The web console is the generally preferable technique.



## NOTE

To generate PCE Support Reports, you must be the Global Organization Owner for your PCE or a member of the Global Administrator role.

To download an already generated support report bundle from the web console, you must be the Global Organization Owner or Global Administrator.

# **Generate PCE Support Bundle in Web Console**

The PCE web console has a Support Bundles page where you can generate PCE support reports. PCE support bundles can also be generated at the command line, but the web console provides a more convenient method which is accessible to more types of users.

# Generate a support bundle

- 1. Choose Troubleshooting > VEN Support Bundles.
- **2.** Click the PCE tab and then **Generate**. Select optional content as desired.
- 3. Click Generate

When the support report is complete, it will be available to download on that page

Up to five previously generated PCE support bundles remain available for download in a list on the PCE Support Bundles tab.

#### Generate a Report for the last 24 hours

Use the option "all" to get the support report for the last 24 hours from the time the command is run:

sudo -u ilo-pce /opt/illumio-pce/illumio/bin/support\_report all wait
duration=24

This command gets the support report 3 hours prior to the ending time. In this example, Sept 14, 2018 at 15:40:

sudo -u ilo-pce /opt/illumio-pce/illumio/bin/support\_report all wait
duration=3 to=09/14/2018T15:40:00

# Get all info in the logs

If you are not sure of the time the issue started, run this command instead:

sudo -u ilo-pce /opt/illumio-pce/illumio/bin/support\_report all wait

## **Generate PCE Support Report at Command Line**

Use the PCE support\_report command-line tool to generate several types of PCE Support Reports:

- **PCE Support Report:** Various diagnostic reports designed to provide Illumio Customer Support with PCE information, such as application logs, process information, and machine statistics.
- **PCE System Inventory Report:** An inventory of the PCE software and all the objects you have created and configured, such as total number of workloads, rules, ruleset scopes, labels, pairing profiles, the number of VENs deployed, OS on deployed VENs, and any modified (non-default) API or object limits.
- **PCE Host Inventory Report:** An inventory of the host, including information such as the number of processors configured on the host and the amount of physical disk space and memory being utilized.
- **PCE Support Report Search Function:** You can search PCE log files by string and by a date range.

The PCE saves the support\_report command and its arguments in report\_log so that you can see the command that was used to generate the support report.

## **Support Report Command-line Syntax**

To create a Support Report, follows these general steps:

- 1. Enter the support\_report command with options.
- 2. When you include support\_report search options (for example, from= and to=, or combinations), enter the support\_report list command after entering the search options.

The output is a date-stamped tar file. When the support\_report command is finished, it displays the path to the file.

Support Report Option	Description
None	Does a system inventory.
system	Generates a node report and inventory report.
inventory	Generates an inventory report only.
list	Runs the report defined by the latest support_report options.
logs (+ optional search arguments)	Includes logs and the optional search criteria described in Search the PCE Log Files [136].
procs	Includes process details in the Support Report.
stats	Includes statistics in the Support Report.

## **Run PCE Support or Inventory Report at Command Line**

To run the PCE Support Report:

- 1. To generate the PCE Support Report to collect inventory, logs, statistics, and processes, run this command:
  - \$ sudo -u ilo-pce /opt/illumio-pce/illumio/bin/support\_report inventory
    system stats procs logs
- 2. To view options for the Support Report, add the help option:
  - \$ sudo -u ilo-pce /opt/illumio-pce/illumio/bin/support\_report help

To run a PCE inventory report:

- 1. Make sure your shell environment is correctly set up by running this command:
  - \$ source /opt/illumio-pce/illumio/bin/illumio/scripts/support
- 2. To run the PCE system inventory report, run this command:
  - \$ sudo -u ilo-pce illumio-pce-env inventory system
- **3.** To run the PCE host inventory report, run this command:
  - \$ sudo -u ilo-pce illumio-pce-env inventory host

#### **View Host and System Inventory**

You can use the following commands to get a quick source of information for troubleshooting or when working with Illumio Customer Support. Using these commands is a quicker and less detailed alternative to running a PCE support report.

To show host inventory for the "local" node:

\$ illumio-pce-env show host-inventory

To show system inventory for the PCE:

\$ illumio-pce-env show system-inventory

To show host inventory for all PCE nodes and also the PCE system inventory:

\$ illumio-pce-env show inventory

## PCE HA and DR

This section describes how to achieve high availability (HA) for the PCE, and how to handle disaster recovery (DR) if a failure occurs.

# **PCE HA and DR Concepts**

This section describes how the PCE provides high availability (HA) and disaster recovery (DR).

#### Overview of PCE HA and DR

The PCE provides high availability (HA). In the event of a failure, your PCE cluster's availability and operability can be maintained with zero or minimal data loss and no or limited human intervention, based on the type of failure that occurs.

HA for the PCE depends on the type and severity of failure that occurs. For example, in less severe, non-catastrophic failure cases, such as when a node is powered off, or network connection is lost, the cluster's availability is automatically re-established without human intervention and with no or limited data loss.

In other more severe disaster cases, such as part or all of the PCE is damaged or destroyed, the PCE is designed to be able to recover with minimal data loss and a minimum amount of human intervention.

In all PCE failure cases, the VENs continue to enforce the last known policy until the PCE is recovered.

# **Design Goals for PCE HA**

The PCE is designed to handle system or network failures based on the following design goals:

- Elimination of single points of failure: A failure of one component (PCE node or service) does not mean failure of the entire PCE cluster. Recovery from failure is done with zero or minimal loss of data.
- **Detection of failures as they occur.** The PCE detects failure without human intervention.
- Reliable recovery: Recovery from failure is done with zero of minimal loss of data.

Three conditions determine whether the PCE can survive a failure and remain available:

- Quorum
- Service availability
- Capacity

All these conditions must be met for the PCE to be available and provide acceptable performance.

#### Quorum

A PCE cluster relies on *quorum*, which is a sufficient number of servers to ensure consistent operation. Quorum prevents the so-called "split brain" case where two parts of the cluster are operating autonomously. Any node that becomes disconnected from the quorum is automatically isolated or "fenced" by shutting down most of its services.

All core nodes and the dataO node (an odd number) are voting members of the quorum. The data1 node is not a voting member. A majority of these nodes must be available to maintain quorum and elect a cluster leader.

When a cluster experiences a failure and doesn't have the majority of nodes functioning to maintain quorum, the cluster becomes unavailable until it recovers the minimal number of nodes.

In practice, this means that as long as at least one core node and one data node are available, the PCE remains operational but with restricted functionality.

#### **Service Availability**

Another key requirement of PCE high availability is service availability, which means at least one instance of all required PCE services are available.

The Service Discovery Service (SDS) monitors all services running on each node in the cluster. This service must be monitored for failure. See Monitor PCE Health [138] for information.

For a PCE cluster to provide all its necessary services, even in the event of a partial cluster failure, it must contain at least one functioning data node and at least one core node, with all services fully available on each node.

Node Type	Service Tiers
Core	<ul><li>Front end</li><li>Processing</li><li>Service and caching</li></ul>
Data	<ul><li>Service and caching</li><li>Data persistence (database)</li></ul>

#### Capacity

Cluster capacity means that at any given time, the PCE is able to provide sufficient compute resources to meet the demands required by the number of workloads deployed.

PCE 2x2 and 4x2 clusters are sized to support the loss of one data node plus half the total number of core nodes and still operate with degraded performance (1+1 redundancy). When more than one data node plus half the total number of core nodes in the cluster is lost, the cluster might not have sufficient capacity to meet demands.

## **PCE HA and DR Requirements**

This section describes how to ensure your underlying systems are sufficient to successfully provide high availability (HA) and disaster recovery (DR) features. Check all of the following system requirements.

# **PCE Cluster Front End Load Balancing**

In order for a PCE cluster to provide high availability, it requires a front-end load balancer to manage traffic distribution and system health checking for the PCE.

The load balancer must be customer-provided and managed, and is not included as part of the PCE software distribution. You have the option of using a traffic load balancer or DNS load balancer.



#### **IMPORTANT**

The load balancer must be able to run application level health checks on each of the core nodes in the PCE cluster, so it can be aware at all times whether each node is available to service requests.

# **Traffic Load Balancer Requirements**

The PCE requires the following traffic load balancer configuration:

- Layer 4 with Secure Network Address Translation (SNAT)
- · Least connection (recommended) or round robin load balancing to core nodes
- HTTP health checks from load balancer to core nodes
- High availability capabilities
- A virtual IP (VIP) configured in the runtime\_env.yml parameter cluster\_public\_ips



#### NOTE

Using a traffic load balancer is recommended over DNS, because it provides a quicker failure response, while DNS load balancing typically has a longer failover time.

# **DNS Load Balancing**

Another option for load balancing the PCE cluster is using DNS, where traffic is load balanced to the core nodes based on DNS rather than connection-based load balancing.

When you plan to use DNS for load balancing the PCE software, the PCE requires the following DNS load balancer configuration:

Round robin load balancing to core nodes

- 30 to 60 second TTL to allow for quick failover
- PCE core node IP addresses configured in the runtime\_env.yml parameter named cluster public ips
- HTTP health checks from the load balancer to core nodes
   The DNS must be able to run health checks against the PCE node\_available API, and the DNS load balancer should only serve IP addresses for the cluster FQDN of those nodes that respond to the node\_available API.

# **Network Latency Between Nodes**

Ensure that network latency between and among the nodes of the clusters does not exceed 10ms. Proper operation of Illumination and Explorer is assured when latency is 10ms or less.

# **PCE Replication and Failover**

(Not supported for Supercluster.)

To increase reliability, you can set up replication and failover for PCEs. Having a PCE on "warm standby," ready to take over if the active PCE fails, contributes to a resilient disaster recovery (DR) plan.

For PCE replication and failover, set up PCEs in pairs. Each pair has an active PCE and a standby PCE. A combination of continuous real-time replication and periodic synchronization is used to keep the standby PCE's data up to date with the active PCE. If the active PCE fails, the standby PCE can take over and become the new active PCE.

The data from the following services are replicated:

- database\_service
- · citus coordinator service
- reporting\_database\_service
- · agent traffic redis server
- data\_job\_queue\_redis\_service
- fileserver

#### **Standby PCE Prerequisites**

Before designating a standby PCE, perform the following preparation steps.

# **Set Up Two PCEs**

Install PCE software on two machines or find two machines where it is already installed. Be sure the following are true:

- Hardware configuration and capacity are as near identical as possible on the two PCEs.
- PCE software version is the same on both PCEs.

#### **Reset Any Repurposed PCE**

If you are repurposing an existing PCE to be the standby, be sure the PCE is completely reset.

1. On all nodes of the existing PCE, run the following command to reset the PCE:

- \$ sudo -u ilo-pce illumio-pce-ctl reset
- 2. On all nodes of the existing PCE, run the following command to start the PCE and set it to runlevel 1:
  - \$ sudo -u ilo-pce illumio-pce-ctl start --runlevel 1
- **3.** On any one data node of the existing PCE, run the following command to set up the database:
  - \$ sudo -u ilo-pce illumio-pce-db-management setup

#### **Open Ports Between Active and Standby PCEs**

Be sure the required ports are open on both PCEs to allow network traffic between the active PCE and the standby PCE so data replication can occur. Make sure that all the same service ports are opened on the standby PCE and the active PCE. For a list of the required ports, see Port Ranges for Cluster Communication in PCE Installation and Upgrade Guide.

# **Set Up FQDNs**

Set up the FQDNs that are required when using active and standby PCEs:

- FQDN of the active PCE.
- FQDN of the standby PCE.
- In the runtime\_env.yml file, active\_standby\_replication:active\_pce\_fqdn is always the FQDN of the currently active PCE. This setting must contain a valid FQDN that can be used as a GSLB FQDN.

Add active\_standby\_replication:active\_pce\_fqdn to the runtime\_env.yml file on both PCEs, active and standby. Example:

```
pce_fqdn: FQDN of the active PCE
active_standby_replication:
   active_pce_fqdn: active-pce-fqdn.com
```



#### WARNING

Whether the PCE runs in a standalone or active-standby mode, never remove the setting active\_pce\_fqdn from runtime\_env.yml. VENs are paired using this FQDN. Removing this entry will break VEN communications.

There are two options for setting up these FQDNs.

**Option 1:** Use a new FQDN for active\_standby\_replication:active\_pce\_fqdn.

You can use a FQDN that is not currently assigned to either the active PCE or the standby PCE. Use this option if you do not want to update the FQDN of the currently active PCE. The FQDN assigned to active\_pce\_fqdn should resolve to the currently active PCE. For example:

```
Existing Setup
Active PCE:
```

```
pce_fqdn: active-pce.com

Standby PCE:
    pce_fqdn: standby-pce.com

Before Standby is Set Up

Active PCE:
    pce_fqdn: active-pce.com
    active_standby_replication:
        active_pce_fqdn: active-pce-global.com

Standby PCE:
    pce_fqdn: standby-pce.com
    active_standby_replication:
    active_standby_replication:
    active_pce_fqdn: active-pce-global.com
```

The active\_pce\_fqdn always contains the FQDN of the PCE that is currently active in the active-standby pair. When a standby PCE is set up, the VEN master configuration is updated if needed so that it contains the active\_pce\_fqdn FQDN. After the standby PCE is set up, VENs paired to the active PCE contain the active\_pce\_fqdn in their master configuration. If the standby PCE is promoted, reconfigure the load balancer or GTM so that active\_pce\_fqdn resolves to the promoted (new active) PCE.

**Option 2:** Use the FQDN of the active PCE for active\_standby\_replication:active\_pce\_fqdn.

You might have scripts that use the pce\_fqdn of the active PCE. In this case, it is easier to set active\_pce\_fqdn to the same value. Before you set up the standby PCE, change the pce\_fqdn of the active PCE to something other than the active\_pce\_fqdn. For information about how to do this, see Update PCE Configuration. If necessary, reconfigure your load balancer or global traffic manager (GTM) so that active\_pce\_fqdn and the new pce\_fqdn of the active PCE resolve to the active PCE. For example:

```
Existing Setup

Active PCE:
    pce_fqdn: active-pce.com

Standby PCE:
    pce_fqdn: standby-pce.com

Before Standby is Set Up

Active PCE:
    pce_fqdn: active-pce-updated.com
    active_standby_replication:
        active_pce_fqdn: active-pce.com

Standby PCE:
    pce_fqdn: standby-pce.com
    active_standby_replication:
    active_pce_fqdn: active-pce.com

active_standby_replication:
    active_pce_fqdn: active-pce.com
```

#### (Optional) Set DNS TTL Value

The DNS TTL (time to live) setting affects how long it takes for a new active PCE to take over in a failover situation. Consider adjusting the DNS TTL to avoid any delay. A shorter value, such as 30 minutes, is recommended.

#### **Set Up PCE Certificates**

The SSL certificate must include all three FQDNs that are described in Set Up FQDNs [159].

# **Set Up VEN Library**

The PCE acts as a repository for distributing, installing and upgrading the VEN software. Install or update the VEN library on both the active and standby PCEs. See the VEN Installation and Upgrade Guide.



#### NOTE

Be sure the VEN versions in the library are supported by the PCE version that is installed.

# Set Up a Standby PCE

To set up a standby PCE and associate it with its active PCE partner, use the following steps.

- 1. Complete the prerequisite steps in Standby PCE Prerequisites [158].
- 2. On the active PCE, generate an API key. This API key is used only while setting up the standby PCE.
- **3.** Bring the standby PCE to runlevel 2. On any node of the standby PCE, run the following command:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 2
```

The active PCE can remain at runlevel 5.

- **4.** On the standby PCE, run the following commands to set up authentication. In username
  - , give the active PCE's API key authentication username. In secret
  - , give the API key secret.

```
$ export ILO_ACTIVE_PCE_USER_NAME=username
```

- \$ export ILO\_ACTIVE\_PCE\_USER\_PASSWORD=secret
- **5.** Link the standby PCE to its active PCE. On the standby PCE, run the following command. For

```
active pce fqdn:front end management https port
```

, give the FQDN and port of the current active PCE. The value in --active-pce is not the same as active\_pce\_fqdn in the configuration file runtime\_env.yml.

```
$ sudo -u ilo-pce -E illumio-pce-ctl setup-standby-pce --active-pce
active_pce_fqdn:front_end_management_https_port
```



## WARNING

Do not bring the standby PCE to runlevel 5.

**6.** After replication is set up up for the first time, the status of some services, such as the citus\_coordinator\_service, might be NOT RUNNING for a long time, and the cluster status is stuck in PARTIAL. This is usually because the service is performing a database backup, which can take time depending on network latency, disk IOPS, traffic flow, and traffic data size. To check whether the backup process is running, use the following command:

```
$ ps -ef | grep pg
```

Example output:

```
pce 84742 73150 18 16:25 ? 00:04:42
  /var/illumio_pce/external/bin/pg_basebackup -d host=10.31.2.172
port=5532 -D /var/traff_dir/traffic_datastore -v -P -X stream -c fast
pce 84747 84742 7 16:25 ? 00:01:54
  /var/illumio_pce/external/bin/pg_basebackup -d host=10.31.2.172
port=5532 -D /var/traff_dir/traffic_datastore -v -P -X stream -c fast
```



#### WARNING

If the citus coordinator service is busy with a backup, do not restart services yet. Wait until this operation is complete and the service status changes to RUNNING.

**7.** Restart services on the active PCE. On *any node* of the active PCE, run the following command:

```
$ sudo -u ilo-pce illumio-pce-ctl cluster-restart
```

For example:

```
$ export ILO_ACTIVE_PCE_USER_NAME=api_17abrwerwe
$ export ILO_ACTIVE_PCE_USER_PASSWORD=6efefeafe34ewroopp11494934kdf
$ sudo -u ilo-pceillumio-pce-ctl setup-standby-pce --active-pce
active.pce.com:8443
$ sudo -u ilo-pce illumio-pce-ctl cluster-restart
```

#### **Failover to Standby PCE**

This section tells how to perform a PCE failover for disaster recovery (DR). The active PCE has failed, and you need to promote the standby PCE so it can take over as the active PCE. Follow these steps.

1. Check to be sure the PCE you are about to promote is actually a standby PCE and that it is at runlevel 2.

```
$ sudo -u ilo-pce illumio-pce-ctl active-standby?
```

The output should say "standby."

**2.** Check to be sure the active PCE has failed and is offline. There must not be any data replicating to the standby PCE. *On every node of the active PCE*, run the following command:

#### \$ sudo -u ilo-pce illumio-pce-ctl cluster-status

The output should contain STOPPED. Be sure to repeat this command on every node of the PCE.

3. On the standby PCE, run the following command to promote the standby PCE.

#### \$ sudo -u ilo-pce illumio-pce-ctl promote-standby-pce

When the active PCE is down, this command promotes this PCE to be the new primary. If the active PCE is not down, the standby PCE will not be promoted, and a message like "Active PCE is still reachable" is generated.

- 4. Make sure that DNS recognizes this as the new active PCE FQDN so devices in your network can find the PCE. Make sure that the values for both active\_standby\_replication and active\_pce\_fqdn in the configuration file runtime\_env.yml are the PCE FQDN of the former standby (new active) PCE. For example, reconfigure the PCE FQDN on load balancers. The steps depend on your devices and configuration. For more information about the PCE FQDN, see Standby PCE Prerequisites [158].
- 5. Check the VEN synchronization status by running the following command:

#### \$ sudo -u ilo-pce illumio-pce-ctl promote-standby-check


Run the command repeatedly and watch the output to make sure the VEN sync count increases. This indicates that the DNS change is in effect and the new active PCE has been promoted successfully.

The DNS update for the new PCE FQDN can take some time, depending on the DNS TTL value.

**6.** When you are ready, connect a new standby PCE to the new active PCE. Repeat the steps in Standby PCE Prerequisites [158] and Set Up a Standby PCE [161].

# **Monitoring Replication**

In the Health page of the PCE web console, use the Standby Replication tab to monitor replication between the active PCE and standby PCE. The Standby Replication tab shows the replication lag on the active and standby PCEs for the traffic database, the policy database, the reporting database, the job queue redis, and traffic data redis. (The fileserver is not shown.)

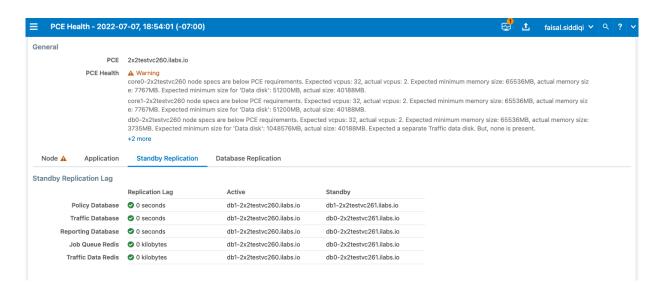

Another way that the PCE administrator can monitor replication is by watching the service discovery log for WAL segment missing errors. This error may appear when the standby traf-

fic database service could not keep up with synchronization from the active traffic database service. When this error occurs, the log looks like the following:

2022-06-30T15:43:19.556560+00:00 level=warning host=db0-4x2systest50 ip=127.0.0.1 program=illumio\_pce/service\_discovery| sec=603799.555 sev=ERROR pid=12416 tid=2440 rid=0 [citus\_coordinator\_service] Health Check: WAL segment 105/2B95FD98 is missing. Full base backup marker file set.

When this situation arises, the citus\_coordinator\_service causes the service to restart and perform the full database backup again. The network latency, disk IOPS, traffic flow, and traffic data size affect the replication latency. If you experience this issue, make any improvements you can to these factors.

For example, you can increase the value of the wal\_keep\_segments setting in the traffic\_datastore section of the runtime\_env.yml configuration file. Increasing this value comes at the expense of disk space cost. Each WAL segment is 16 MB, so 5120 WAL segments would use about 82 GB of extra space.

traffic\_datastore:

wal\_keep\_segments: 5120

#### **Limitations and Constraints**

When using active and standby PCEs for replication, be aware of the following limitations and constraints:

- Fileserver replication lag is not shown in the Standby Replication tab of the Health page.
- Support reports are replicated, but support bundles are not replicated.
- In an active-standby PCE pair, it is not necessary to perform database backups in the same way you would with a standalone PCE. However, if you wish to do so, take the backups from the active PCE. It is also not normally necessary to restore a database backup on the active PCE or the standby PCE. If one of the PCEs fails, the other takes over as active PCE, and it already has an up-to-date copy of the data because of the ongoing replication between the two PCEs.



#### **WARNING**

If it becomes necessary to restore data from a backup (for example, if both PCEs fail), you must restore the same backup to both the active PCE and the standby PCE.

## **PCE Failures and Recoveries**

This section describes how the PCE handles various types of possible failures. It tells whether the failure can be handled automatically by the PCE and, if not, what manual intervention you need to perform to remedy the situation.

## PCE Core Deployments and High Availability (HA)

The most common PCE Core deployments are either 2x2 or 4x2 setup.

For High Availability (HA) purpose, the PCE nodes can be deployed as 2 separate pairs (either 1core+1data or 2core+1data respectively) in separate data centers.

For high availability, the database services run in a primary replica mode with the primary service running on either of the data nodes.



#### NOTE

Both data nodes (data0 & data1) are always working as "active". Therefore, one of the data nodes (data1) is not on a "warm" standby that would become "active" when the primary data node has failed.

# **Types of PCE Failures**

These are the general kinds of failures that can occur with a PCE deployment:

- **PCE-VEN network partition:** A network partition occurs that cuts off communication between the PCE and VENs.
- PCE service failure: One or more of the PCE's services fail on a node.
- PCE node fallure: One of the PCE's core or data nodes fails.
- **PCE split cluster failure (site failure):** One data plus half the total number of core nodes fail.
- **PCE cluster network partition:** A network partition occurs between two halves of a PCE cluster but all nodes are still functioning.
- **Multi-node traffic database fallure:** If the traffic database uses the optional multi-node configuration, the coordinator and worker nodes can fail.
- Complete PCE fallure: The entire PCE cluster fails or is destroyed and must be rebuilt.

#### **Failure-to-Recovery Stages**

For each failure case, this document provides the following information (when applicable):

Stage	Details
Precondi- tions	Any required or recommended pre-conditions that you are responsible for to recover from the failure.
	For example, in some failure cases, Illumio assumes you regularly exported a copy of the primary database to an external system in case you needed to recover the database.
Failure be- havior	The behavior of the PCE and VENs from the time the failure occurs to recovery. It can be caused by the failure itself or by the execution of recovery procedures.

Stage	Details
Recovery	A description of how the system recovers from the failure incident to resume operations, which might be automatic or require manual intervention on the PCE or VEN. When intervention is required, the steps are provided.
	Includes the following items:
	• Recovery type: Can the PCE and VENs automatically recover from the failure, or is human intervention required to resume operations?
	<ul> <li>Recovery procedure (when required): When human intervention is required on the PCE or VENs, the recovery procedures are provided.</li> </ul>
	<ul> <li>Recovery Time Objective (RTO): The average time it takes to detect and recover from a failure.</li> <li>Recovery Point Objective (RPO): The amount of data loss due to the failure.</li> </ul>
Full Recov- ery (not al- ways appli- cable)	In some cases, additional steps might be required to revert the PCE to its normal, pre-failure operating state. This situation is usually a planned activity that can be scheduled.


# **Legend for PCE Failure Diagrams**

The following diagram symbols illustrate the affected parts of the PCE in a failure:

- Dotted red line: Loss of network connectivity, but all nodes are still functioning
- **Dotted red X:** Failure or loss of one or more nodes, such as when a node is shut down or stops functioning

## **PCE-VEN Network Partition**

In this failure case, a network partition occurs between the PCE and VENs, cutting off communication between the PCE and all or some of its VENs. However, the PCE and VENs are still functioning.




Stage	Details
Precondi- tions	None

Stage	Details
Failure Behavior	PCE
	<ul> <li>Users cannot provision any changes to the VENs until the connection is re-established.</li> <li>The information displayed in the Illumination map in the PCE web console is only as current as the last time the VENs reported to the PCE.</li> <li>The PCE ignores any disconnected VENs until at least one hour has passed.</li> <li>When the outage persists longer than one hour, the PCE marks unreachable VENs as offline. When any existing policy allows the offline VENs to communicate with other VENS, the PCE recalculate its current policy and exclude those workloads marked as offline.</li> </ul>
	VENs
	<ul> <li>VENs continue to enforce their last known good policy.</li> <li>All VEN state and flow updates are cached locally on the workload where the VEN is installed. The VEN stores up to 24 hours of flow data then purges the oldest data first during an extended event.</li> <li>After missing 3 heartbeats (approximately 15 minutes), the VEN enters a degraded state, during which the VEN ignores all asynchronous commands received as lightning bolts from the PCE, except commands that initiate software upgrade and Support Reports.</li> </ul>
Recovery	<ul> <li>Recovery type: Automatic. The VEN tries to connect to the PCE every 5 minutes. After PCE-VEN network connectivity is restored, the VENs automatically reconnect to the PCE and resume normal operations:</li> <li>Policy for the VEN is automatically synchronized (when new policy from PCE was provisioned during failure).</li> <li>Cached state and flow data from the VEN is sent to the PCE.</li> <li>After three successful heartbeats (approximately 15 minutes), the VEN comes out of the degraded state.</li> <li>Recovery procedure: None required.</li> <li>RTO: Customer dependent based on the time it takes for PCE-VEN network connectivity to be restored, plus approximately 15 minutes for three successful heartbeats.</li> </ul>

# **Service Failure**

In this failure case, one of the PCE's services fails on a node.

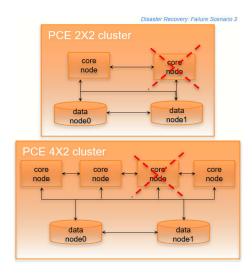


Stage	Details
Precondi- tions	None.

Stage	Details
Failure Be- havior	PCE
	<ul> <li>The PCE might be temporarily unavailable.</li> <li>Users might be unable to log into the PCE web console.</li> <li>The PCE might return an HTTP 502 response and the /node_available API request might return an HTTP 404 error.</li> <li>Other services that are dependent on the failed services might be restarted within the cluster.</li> </ul>
	<ul> <li>VENs are not affected.</li> <li>VENs continue to enforce the current policy.</li> <li>When a VEN misses a heartbeat to the PCE, it retries in 5 minutes.</li> </ul>
Recovery	<ul> <li>Recovery type: Automatic. The PCE's SDS ensures that all PCE services are running, including itself. When any service fails, SDS restarts it.</li> <li>Recovery procedure: None required.</li> <li>RTO: Variable depending on which service failed and how many dependent services must be restarted. Typically 30 seconds to 2 minutes.</li> <li>RPO: Zero.</li> </ul>

# **Core Node Failure**


In this failure case, one of the core nodes completely fails. This situation occurs anytime a node is not communicating with any of the other nodes in the cluster; for example, a node is destroyed, the node's SDS fails, or the node is powered off or disconnected from the cluster.

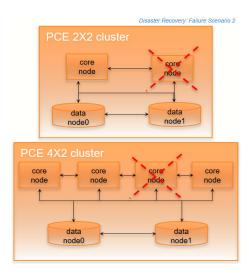

# Stage **Details** Precondi-The load balancer must be able to run application level health checks on each of the core nodes in the tions PCE cluster, so that it can be aware at all times whether a node is available. **IMPORTANT** When you use a DNS load balancer and need to provision a new core node to recover from this failure, the runtime\_env.yml file parameter named cluster\_public\_ips must include the IP address of your existing core nodes and the IP addresses of the replacement nodes. When this is not configured correctly, VENs will not have outbound rules programmed to allow them to connect to the IP address of the replacement node. Illumio recommends that you preallocate these IP addresses so that, in the event of a failure, you can restore the cluster and the VENs can communicate with the replacement node. PCE Fallure Behavior • The PCE is temporarily unavailable. • Users might be unable to log into the PCE web console. • The PCE might return an HTTP 502 response and the /node\_available API call might return an HTTP 404 error. · Other services that are dependent on the failed services might be restarted within the cluster. VENs · VENs are not affected. · VENs continue to enforce the current policy. • When a VEN misses a heartbeat to the PCE, it retries in 5 minutes. • Recovery type: Automatic. The cluster has multiple active core nodes for redundancy. Recovery Recovery procedure: None required. • RTO: 5 minutes • RPO: Zero. No data loss occurs because the core nodes are stateless. Full Re-Either recover the failed node or provision a new node and join it to the cluster. For information, see Replace a Failed Node [114].

#### **Data Node Failure**


In this failure case, one of the data nodes completely fails.

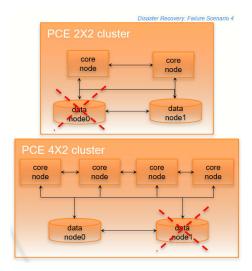


## Stage **Details** Precondi-You should continually monitor the replication lag of the replica database to make sure it is in sync with tions the primary database. You can accomplish this precondition by monitoring the illumio\_pce/system\_health syslog messages or by running the following command on one of the data nodes: \$ sudo -u ilo-pce illumio-pce-db-management show-replication-info Fallure DCE Behavlor The PCE is temporarily unavailable. · Users might be unable to log into the PCE web console. • The PCE might return a HTTP 502 response and the /node\_available API call might return an HTTP 404 error · Other services that are dependent on the failed services might be restarted within the cluster. · When the set\_server\_redis\_server service is running on the failed data node, the VENs go into the syncing state and policy is re-computed for each VEN, even when no new policy has been provisioned. The CPU usage on the PCE core nodes might spike and stay at very high levels until policy computation is completed. **VENs** • VENs are not affected and continue to enforce the current policy. • When a VEN misses a heartbeat to the PCE, it retries in 5 minutes. • Recovery type: Automatic. The PCE detects this failure and automatically migrates any required Recovery data services to the surviving data node. When the failed node is the primary database, the PCE automatically promotes the replica database to be the new primary database. · Recovery procedure: None required. • RTO: 5 minutes, with the following caveats for specific PCE services: • set\_server\_redis\_server: Additional time is required for all VENs to synchronize. This time is variable based on the number of VENs and complexity of the policy. • RPO Service-specific based on the data services that were running on the failed data node. · database\_service: Implies the failed data node was the primary database. All data committed to the primary database, and not replicated to the replica, is lost. Typically under one second. · database\_slave\_service: Implies the failed data node is the replica database. No data is lost. • agent\_traffic\_redis\_server: All traffic data is lost. • fileserver\_service: All asynchronous query requests and Support Reports are lost. Full Re-When the failed data node is recovered or a new node is provisioned, it registers with PCE and is added as an active member of the cluster. This node is designated as the replica database and will covery replicate all the data from the primary database. For recovery information, see Replace a Failed Node [114].

## **Primary Database Doesn't Start**

In this failure case, the database node fails to start.

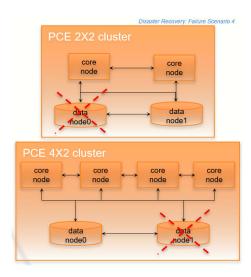

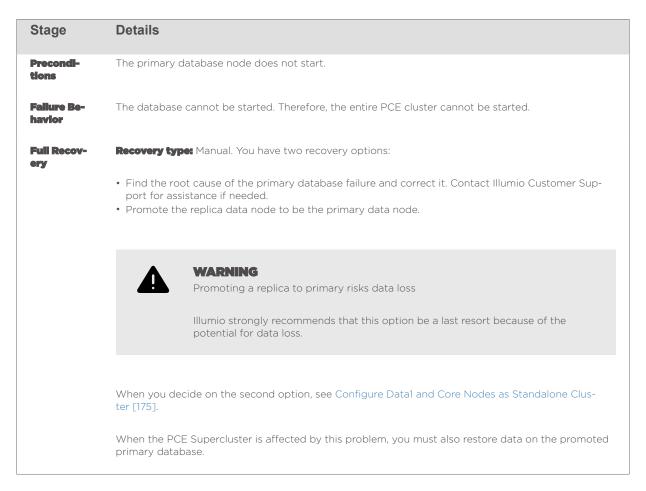

## **Primary Database Doesn't Start When PCE Starts**

In this failure case, the database node fails to start when the PCE starts or restarts.

The following recovery information applies only when the PCE starts or restarts. When the PCE is already running and the primary database node fails, database failover will occur normally and automatically, and the replica database node will become the primary node.

Stage	Details
Precondi- tions	The primary database node does not start during PCE startup. This issue could occur because of an error on the primary node. Even when no error occurred, you might start the replica node first and then be interrupted, causing a delay in starting the primary node that exceeds the timeout.
Failure Be- havior	The database cannot be started. Therefore, the entire PCE cluster cannot be started.
Full Re- covery	Recovery type: Manual. You have two recovery options:
	<ul> <li>Find and correct the root cause of the primary database failure. Contact Illumio Customer Support for help if needed.</li> <li>Promote the replica data node to primary data node.</li> </ul>
	WARNING Promoting replica to primary risks data loss
	Consider this option as a last resort because of the potential for data loss, depending on the replication lag.
	When you decide on the second option, on the <i>replica database node</i> , run the following command:
	<pre>\$ sudo ilo-pce illumio-pce-ctl promote-data-node <core-node-ip-address></core-node-ip-address></pre>
	This command promotes the node to be the primary database for the cluster whose leader is at the specified IP address.

## **Site Failure (Split Clusters)**

In this failure type, one of the data nodes plus half the total number of core nodes fail, while the surviving data and remaining core nodes are still functioning.

For example:

In a 2x2 deployment, a split cluster failure means the loss of one of these node combinations:

- DataO and one core node
- Data1 and one core node

In a 4x2 deployment, a split cluster failure means the loss of one of these node combinations::

- DataO and two core nodes
- Data1 and two core nodes

This type of failure can occur when the PCE cluster is split across two separate physical sites or availability zones with network latency greater than 10ms, and a site failure causes half the nodes in the cluster to fail. A site failure is one case that can cause this type of failure; however, split cluster failures can also occur in a single site deployment when multiple nodes fails simultaneously for any reason.

# **Split Cluster Failure Involving Data1**

In this failure case, data1 and half the core nodes completely fail.


PCE 2X2 cluster

core node

core node

data node0

data node1

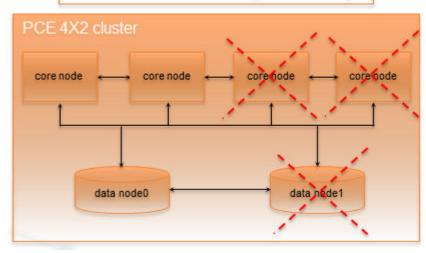


040.00	Dataila
Stage	Details
Precondi- tions	None.
Fallure Be- havior	PCE
	<ul> <li>The PCE is temporarily unavailable.</li> <li>Users might be unable to log into the PCE web console.</li> <li>The PCE might return a HTTP 502 response and the /node_available API request might return am HTTP 404 error.</li> <li>Other services that are dependent on the failed services might be restarted within the cluster.</li> </ul>
	<ul> <li>VENs are not affected.</li> <li>VENs continue to enforce the current policy.</li> <li>When a VEN misses a heartbeat to the PCE, it retries in 5 minutes.</li> </ul>

Stage	Details
Recovery	<ul> <li>Recovery type: Automatic. Because quorum is maintained, the data0 half of the cluster can operate as a standalone cluster. When data1 is the primary database, the PCE automatically promotes data0 to be the new primary database.</li> <li>Recovery procedure: None.</li> <li>RTO: 5 minutes.</li> <li>RPO: Service specific based on which data services were running on data1 at the time of the failure: <ul> <li>database_service: Data1 node was the primary database. All database data committed on data1 and not replicated to data0 is lost. Typically under one second.</li> <li>database_slave_service: Data1 node was the replica database. No database data is lost.</li> <li>agent_traffic_redis_server: All traffic data is lost.</li> </ul> </li> </ul>
	<ul> <li>fileserver_service: All asynchronous query requests and Support Reports are lost.</li> </ul>
Full Recov- ery	Either recover the failed nodes or provision new nodes and join them to the cluster.
	For recovery information, see Replace a Failed Node [114].

# **Split Cluster Failure Involving Data0**

In this failure case, dataO and half of the total number of core nodes completely fail.

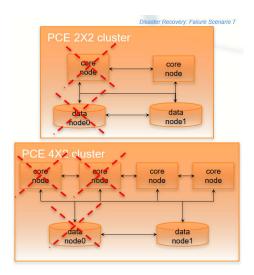

# Preconditions CAUTION When reverting the standalone cluster back to a full cluster, you must be able to control the recovery process so that each recovered node is powered on and re-joined to the cluster one node at a time (while the other recovered nodes are powered off). Otherwise, the cluster could become corrupted and need to be fully rebuilt.

Stage	Details
Failure Behavior	PCE
	The PCE is unavailable because it does not have the minimum number of nodes to maintain quorum.
	VENS
	<ul> <li>The VEN continues to enforce its last known good policy.</li> <li>The VEN's state and flow updates are cached locally on the workload where the VEN is installed. The VEN stores up to 24 hours of flow data, then purges the oldest data first during an extended event.</li> <li>After missing 3 heartbeats (approximately 15 minutes), the VEN enters a degraded state. While it is in the degraded state, the VEN ignores all asynchronous commands received as lightning bolts from the PCE, except the commands that initiate software upgrade and Support Reports.</li> </ul>
Recovery	<ul> <li>Recovery type: Manual intervention is required to recover from this failure case.</li> <li>Recovery procedure: See Configure Data1 and Core Node(s) to Operate as a Standalone Cluster [175] for information.</li> <li>RTO: Customer dependent based on how long it takes you to detect this failure and perform the manual recovery procedures.</li> <li>RPO: Service specific based on which data services were running on data0 at the time of the failure:</li> <li>database_service: Data0 node was the primary database. All database data committed on data0 and not replicated to data1 is lost. Typically under one second.</li> <li>database_slave_service: Data0 node was the replica database. No database data is lost.</li> <li>agent_traffic_redis_server: All traffic data is lost.</li> <li>fileserver_service: All asynchronous query requests and Support Reports are lost.</li> </ul>
Full Re- covery	See Revert Standalone Cluster Back to a Full Cluster [175] for information.

#### **Configure Data1 and Core Nodes as Standalone Cluster**

To enable the surviving data1 and core nodes to operate as a standalone 2x2 or 4x2 cluster, follow these steps in this exact order.

1. On the surviving data1 node and all surviving core nodes, stop the PCE software:

\$ sudo -u ilo-pce illumio-pce-ctl stop

2. On any surviving core node, promote the core node to be a standalone cluster leader:

\$ sudo -u ilo-pce illumio-pce-ctl promote-cluster-leader

**3.** On the *surviving datal node*, promote the datal node to be the primary database for the new standalone cluster:

\$ sudo -u ilo-pce illumio-pce-ctl promote-data-node promoted-core-node-ip-address>

For the IP address, enter the IP address of the promoted core node from step 2.

**4. (4x2 clusters only)** On the *other surviving core node*, join the surviving core node to the new standalone cluster:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-join cpromoted-core-node-ipaddress> --split-cluster

For the IP address, enter the IP address of the promoted core node from step 2.

5. Back up the surviving datal node. For information, see Back Up the Policy Database [119].

#### **Revert Standalone Cluster Back to a Full Cluster**

To revert back to a 2x2 or 4x2 cluster, follow these steps in this exact order:



## **IMPORTANT**

When you plan to recover the failed nodes and the PCE software is configured to auto-start when powered on (the default behavior for a PCE RPM installation), you *must* power on every node and re-join them to the cluster *one node at a time*, while the other nodes are powered off and the PCE is *not* running on the other nodes. Otherwise, your cluster might become corrupted and need to be fully rebuilt.

- 1. Recover one of the failed core nodes or provision a new core node.
- 2. If you provisioned a new core node, run the following command on any existing node in the cluster (not the new node you are about to add). For ip\_address, substitute the IP address of the new node.
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-nodes allow ip\_address
- **3.** On the *recovered or new core node*, start the PCE software and enable the node to join the cluster:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-join cpromoted-core-node-ipaddress>

For the IP address, enter the IP address of the promoted core node.

- 4. (4x2 clusters only) For the other recovered or new core nodes, repeat steps 1-3.
- 5. Recover the failed dataO nodes or provision a new dataO node.
- **6.** If you provisioned a new data node, run the following command on any existing node in the cluster (not the new node you are about to add). For <code>ip\_address</code>, substitute the IP address of the new node.
  - \$ sudo -u ilo-pce illumio-pce-ctl cluster-nodes allow ip\_address
- 7. On the recovered data0 or new data0 node, start the PCE software and enable the node to join the cluster:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-join promoted-core-node-ipaddress>

For the IP address, enter the IP address of the promoted core node.

**8.** On the *surviving data1 node and all core nodes*, remove the standalone configuration for the nodes that you previously promoted during failure:

\$ sudo -u ilo-pce illumio-pce-ctl revert-node-config



#### NOTE

Run this command so that the nodes that you previously promoted during the failure no longer operate as a standalone cluster.

9. Verify that the cluster is in the RUNNING state:

\$ sudo -u ilo-pce illumio-pce-ctl cluster-status --wait

**10** Verify that you can log into the PCE web console.

.



## NOTE


In rare cases, you might receive an error when attempting to log into the PCE web console. When this happens, restart all nodes and try logging in again:

\$ sudo -u ilo-pce illumio-pce-ctl restart

# **Cluster Network Partition**

In this failure case, the network connection between half your PCE cluster is severed, cutting off all communication between the each half of the cluster. However, all nodes in the cluster are still functioning.

Illumio defines "half a cluster" as one data node plus half the total number of core nodes in the cluster.

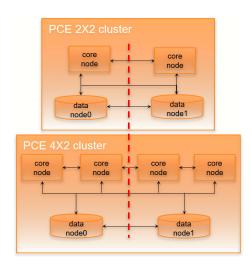

Stage	Details
Precondi- tions	None.
Failure be- havior	PCE
	<ul> <li>The PCE is temporarily unavailable.</li> <li>Users might be unable to log into the PCE web console.</li> <li>The PCE might return an HTTP 502 response and the /node_available API request might return an HTTP 404 error.</li> <li>Other services that are dependent on the failed services might be restarted within the cluster.</li> </ul>
	<ul> <li>VENs are not affected.</li> <li>VENs continue to enforce the current policy.</li> <li>When a VEN misses a heartbeat to the PCE, it retries in 5 minutes.</li> </ul>

Stage	Details
Recovery	• Recovery type: Automatic: Having two sides of the PCE cluster operate independently of each other ("split brain") could cause data corruption. To prevent this situation, the PCE stops services on the nodes that are not part of the quorum (namely, nodes in the data1 half of the cluster). Additionally, the PCE automatically migrates any required data services to the data0 node. When data1 was the primary database, the PCE automatically promotes data0 to be the new primary database.
	Recovery procedure: None required.     RTO: 5 minutes.
	<ul> <li>RPO: Service specific based on which data services were running on data1 at the time of the partition:</li> </ul>
	<ul> <li>database_service: Data1 node was the primary database. All database data committed on data1 and not replicated to data0 is lost. Typically under one second.</li> </ul>
	<ul> <li>database_slave_service: Data1 node was the replica database. No database data is lost.</li> <li>agent_traffic_redis_server: All traffic data is lost.</li> </ul>
	• fileserver_service: All asynchronous query requests and Support Reports are lost.
Full Re- covery	No additional steps are required to revert the PCE to its normal, pre-failure operating state. When network connectivity is restored, the data1 half of the cluster automatically reconnects to the data0 half of the cluster. The PCE then restarts all services on the data1 half of the cluster.

#### **Multi-Node Traffic Database Failure**

If the traffic database uses the optional multi-node configuration, the coordinator and worker nodes can fail.

For information about multi-node traffic database configuration, see "Scale Traffic Database to Multiple Nodes" in the PCE Installation and Upgrade Guide.

#### **Coordinator primary node failure**

If the coordinator master completely fails, all the data-related PCE applications might be unavailable for a brief period. All other PCE services should be operational.

Recovery is automatic after the failover timeout. The coordinator replica will be promoted to the primary, and all data-related applications should work as usual when the recovery is done.



#### **WARNING**

Any unprocessed traffic flow data on the coordinator primary will be lost until the coordinator primary is back to normal.

# **Coordinator primary does not start**

If the coordinator primary does not start, the PCE will not function as usual.

There are two options for recovery:

- Find the root cause of the failure and fix it. Contact Illumio Support if needed.
- Promote a replica coordinator node to primary.



## **WARNING**

Promoting a replica coordinator to a primary can result in data loss. Use this recovery procedure only as a last resort.

To promote a replica coordinator node to primary:

sudo -u ilo-pce illumio-pce-ctl promote-coordinator-node cluster-leader-address

## Worker primary node nailure

If the worker's primary node fails, all data-related applications might be unavailable briefly. All other PCE services should be operational.

Recovery is automatic after the failover timeout. The worker replica will be promoted to the primary. All data-related applications should work as usual once the recovery is done.



#### WARNING

Any data not replicated to the replica worker node before the failure will be lost.

## Worker primary does not start

If the worker primary does not start, the PCE will not function as usual.

There are two options for recovery:

- Find the root cause of the failure and fix it. Contact Illumio Support if needed.
- Promote the corresponding replica worker node to the primary.



#### **WARNING**

Promoting a replica worker to primary can result in data loss. Use this recovery procedure only as a last resort.

To promote a replica worker node to primary, find out the corresponding replica worker for the failed primary node. Run the following command to list the metadata information for all the workers. Get the IP address of the replica for the failed primary:


sudo -u ilo-pce illumio-pce-db-management traffic citus-worker-metadata

Promote the replica worker node to primary:

sudo -u ilo-pce illumio-pce-ctl promote-worker-node core-node-ip

# **Complete Cluster Failure**

In this rare failure case, the entire PCE cluster has failed.

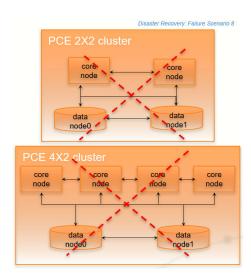

## Stage Details

#### Preconditions

Illumio assumes that you have met the following conditions before the failure occurs for this failure case

#### **IMPORTANT**

You must consistently and frequently back up the PCE primary database to an external storage system that can be used for restoring the primary database after this type of failure. You need access to this backup database file to recover from this failure case.

The runtime\_env.yml file parameter named cluster\_public\_ips must include the front-end IP addresses of the primary and secondary clusters. When this is not configured correctly, VENs will not have outbound rules programmed to allow them to connect to the secondary cluster in a failure case. Illumio recommends that you pre-allocate these IP addresses so that, in the event of a failure, you can restore the cluster and the VENs can communicate with the newly restored PCE.

- Regularly back up the PCE runtime\_env.yml file for each node in the functioning cluster before failure.
- Have a secondary PCE cluster deployed in a data center different from the primary cluster. The secondary PCE cluster can have IP addresses and hostnames that are different from the primary clusters.

#### Failure behavior

#### PCE

• The PCE is unavailable.

#### VENS

- The VEN continues to enforce its last known good policy.
- The VEN's state and flow updates are cached locally on the workload where the VEN is installed. The VEN stores up to 24 hours of flow data and then purges the oldest data first during an extended event.
- The VEN is degraded after missing 3 heartbeats (approximately 15 minutes). While it is in the degraded state, the VEN ignores all asynchronous commands received as lightning bolts from the PCE, except the commands that initiate software upgrades and Support Reports.

Stage	Details
Recovery	<ul> <li>Recovery type: Manual intervention is required to fully recover from this failure case.</li> <li>Recovery procedure: See Complete Cluster Recovery [181] for information.</li> <li>RTO: Customer dependent based on how long it takes to detect this failure and perform the manual recovery procedures.</li> <li>RPO: Customer dependent based on your backup frequency and time of the last backup.</li> </ul>
Full Re- covery	See Complete Cluster Recovery [181] for full recovery information; perform all the listed steps on the restored primary cluster.

## **Complete Cluster Recovery**

Recovering from this failure case requires performing the following tasks:

- 1. Power on all nodes in the secondary PCE cluster.
- 2. Use the database backup file from your most recent backup and restore the backup on the primary database node.

To restore the PCE database from backup, perform the following steps:

**1.** On *all nodes* in the PCE cluster, stop the PCE software:

```
$ sudo -u ilo-pce illumio-pce-ctl stop
```

2. On all nodes in the PCE cluster, start the PCE software at runlevel 1:

```
$ sudo -u ilo-pce illumio-pce-ctl start --runlevel 1
```

**3.** Determine the primary database node:

```
$ sudo -u ilo-pce illumio-pce-db-management show-master
```

**4.** On the *primary database node*, restore the database:

```
$ sudo -u ilo-pce illumio-pce-db-management restore --file <location of
prior db dump file>
```

**5.** Migrate the database by running this command:

```
$ sudo -u ilo-pce illumio-pce-db-management migrate
```

**6.** Copy the Illumination data file from the primary database to the other data node. The file is located in the following directory on both nodes:

```
<persistent data root>/redis/redis traffic 0 master.rdb
```

7. Bring the PCE cluster to runlevel 5:

```
$ sudo -u ilo-pce illumio-pce-ctl set-runlevel 5
```

8. Verify that you can log into the PCE web console.

#### **PCE-Based VEN Distribution Recovery**

When you rely on the PCE-based distribution of VEN software, after you have recovered from a PCE cluster failure, you need to reload or redeploy the PCE VEN Library.

- When you have at least one PCE core node unaffected by the failure, you can redeploy the VEN library to the other nodes.
- When the failure is catastrophic and you have to replace the entire PCE cluster, you need to reload the PCE's VEN library. See VEN Administration Guide for information.

#### **Restore VENs Paired to Failed PCE**

A failed PCE does not receive information from VENs paired with it. This lack of connectivity can result in stale IP addresses and other information recorded for the VENs. Additionally, other PCEs might also have this stale information only. When the PCE regains connectivity, the PCE eventually marks those uncommunicative VENs "offline" and removes them from the policy.

To resolve this situation, you must delete the "offline" workloads from the PCE by using the PCE web console or the REST API. After deleting the VENs, you can re-install and re-activate the affected VENs on the affected workloads.

# **Connectivity Configuration for PCE**

This section describes how to configure connectivity to control access to network resources and communication between workloads.

## **Connectivity Settings**

This section describes how to modify PCE settings that affect connectivity.



#### NOTE

Permission to edit these settings is dependent on your role.

#### **Private Data Centers**

The PCE uses connectivity settings to decide whether workloads are allowed to communicate with each other in private datacenters, private clouds, and shared network environments (private datacenter and public cloud).

By default, the Private Data Center connectivity setting is set and intended for workloads that are hosted in private datacenters, which do not have duplicate IP addresses in the network. When your network environment hosts workloads in your own private datacenter and in a public cloud, and you want to change this setting, contact Illumio Support.

#### **Offline Timers**

You can configure Offline Timers in the PCE web console and choose appropriate settings for your workloads.



#### NOTE

To configure Offline Timers, you must be the Global Organization Owner for your PCE or a member of the Global Administrator role.



## **WARNING**

Disabling the Offline Timer setting degrades your security posture because the PCE will not remove IP addresses that belonged to workloads that have been disconnected from those that were allowed to communicate with the disconnected workloads. You need to remove the disconnected workloads from the PCE to ensure that its IP addresses are removed from the policy.

The PCE isolates a workload from the other workloads when the workload goes offline. The VEN sends a heartbeat message every 5 minutes and a goodbye message when it is gracefully shutdown. The PCE marks a workload offline when these conditions occur:

- The PCE hasn't received a heartbeat message from the VEN for 3600 seconds (1 hour).
- The PCE receives a goodbye message from the VEN.

You can change the default Offline Timer settings before putting your workloads in enforcement under the following conditions:

- The default setting might potentially disrupt your critical applications.
- Application availability is more important than security.



#### NOTE

How you configure this setting is a tradeoff between benefiting from an increased zero-churn outage time window versus increasing the window of time where IP addresses could be reused. You should weigh the operational and security benefits and find a balance suitable for your applications.

## **Decommission and IP Cleanup Timer**

Sets the time period to wait after a managed workload sends a goodbye message to mark it offline. By default, the High Security setting is Wait 15 minutes before IP Cleanup. This default setting has the following affect on the PCE:

1. Listens for Goodbye messages from the VEN.



## NOTE

The default VEN goodbye timeout was increased from zero to 15 minutes. When required, you can reset it to 0.

- 2. Pushes an updated policy to the peer workloads that were previously allowed to communicate with the removed workloads.
- **3.** Immediately cleans up those workloads IP addresses from its active policy.

#### **Disconnect and Quarantine Timer**

Sets the time period to wait with no heartbeat before a managed workload is marked offline.

By default, the High Security setting is Wait One Hour before Timeout. This default setting has the following affect on the PCE:

- 1. Waits for an hour for the disconnected workloads to heartbeat and then quarantine those workloads that do not respond at the end of the hour.
- 2. Removes the quarantined workloads IP addresses from its active policy.
- **3.** Pushes an updated policy to the peer workloads that were previously allowed to communicate with the guarantined workloads.

## **Edit Offline Timers Settings**

Edit the Offline Timers setting to change the values from the default settings.

- 1. From the PCE web console menu, choose **Settings** > **Offline Timers**.
  - The Settings page for Offline Timers appears, which displays the current settings for the timers.
- 2. Click Edit to change the settings from the default values.
- **3. Disconnect and Quarantine Timer:** Select a setting from the drop-down list to change the value from the High Security (Default) setting:
  - Never Timeout or Quarantine Highest Availability

This setting has the following affect on the PCE:

- Never disconnects or quarantines workloads that fail to heartbeat.
- Keeps all IP addresses in policy and never automatically removes unused IP addresses
- Requires a removal of those unused IP addresses.
- Custom Timeout Wait a Specified Time before Quarantine

Enter a time period; the minimum wait time is 300 seconds.

The PCE performs the following actions:

- a. Waits for the specified time period for the disconnected workloads to heartbeat.
- **b.** Quarantines those workloads that do not respond at the end of that time period.
- c. Removes the quarantined workloads IP addresses from its active policy.
- **d.** Pushes an updated policy to the peer workloads that were previously allowed to communicate with the guarantined workloads.
- **4. Decommission and IP Cleanup Timer:** Select a setting from the drop-down list to change the value from the Highest Security (Default) setting:
  - Never clean up Highest Availability

This setting has the following affect on the PCE:

- Ignores Goodbye messages from workloads.
- Keeps all IP addresses in policy and never automatically remove unused IP addresses.
- Requires a removal of those unused IP addresses.
- Custom Timeout Wait a Specified Time before IP Cleanup

Enter a time period; the minimum wait time is 0 seconds.

The PCE performs the following actions:

- a. Listens for Goodbye messages from the VEN.
- **b.** Waits for the specified time period before cleanup of those workloads IP addresses from its active policy.
- **c.** Pushes an updated policy to the peer workloads that were previously allowed to communicate with the removed workloads.
- 5. Click Save.

A message appears displaying your current and new settings.

## **Confirm Timer Setting Changes**

Disconnect and Wait One Hour before Timeout - High Security (Default)

Quarantine Timer Never Timeout or Quarantine - Highest Availability

- Never disconnect or quarantine workloads that fail to heartbeat,
- Keep all IP addresses in policy and never automatically remove unused IP addresses, and
- Require a removal of those unused IP addresses.

Cancel



6. Click **OK** to save the new settings.

## Set the IP Version for Workloads

This section describes how to enforce a preference for IPv4 over IPv6 addresses.

## Change Linux Workloads to Prefer IPv4

To ensure that your paired Linux VEN workloads prefer IPv4 over IPv6 addresses in your PCE organization, edit the /etc/gai.conf file on the VEN by adding the following line:

precedence ::ffff:0:0/96 100

This change will cause getaddrinfo system calls to return the IPv4 addresses before IPv6 addresses.

This method works when you assign IPv4 addresses to your workloads. However, it doesn't work when your workloads only have IPv6 addresses (meaning, no IPv4 addresses for the hosts) or the software installed is hard coded to look for IPv6 addresses.

#### **Change Windows Workloads to Prefer IPv4**

When you choose to allow only IPv4 traffic for your PCE organization, the VENs on your workloads drop IPv6 traffic when they are in Enforced mode. This decision can lead to delays and communication failures in applications because applications will wait for IPv6 connection attempts to time out before attempting to connect over IPv4.

The problem occurs because, by default, the Windows OS prefers IPv6 over IPv4 and will attempt to connect over IPv6 before IPv4. As a workaround, you can change the order of connection attempts so that IPv4 is preferred over IPv6. With this change, applications will connect over IPv4 first and succeed or fail as governed by the workload's firewall policies.

For information about changing the connection order to prefer IPv4 over IPv6, see the Microsoft KB article Guidance for configuring IPv6 in Windows for advanced users.

As explained in the KB article, run the following command and reboot the Windows workload:

reg add hklm\system\currentcontrolset\services\tcpip6\parameters /v DisabledComponents /t REG\_DWORD /d 0x20

To avoid rebooting the Windows workload, run the following commands:

```
netsh interface ipv6 delete prefixpolicy ::ffff:0:0/96
netsh interface ipv6 add prefixpolicy ::ffff:0:0/96 60 4
```

## Allow or Block IPv6 Traffic

When your network environment allows IPv6 traffic, you can configure the PCE to allow or block IPv6 traffic.

By default, all IPv6 traffic is allowed.



#### NOTE

When you want Windows workloads to use IPv4 instead of IPv6, see Set the IP Version for Workloads [185].

To allow or block IPv6 traffic:

- 1. From the PCE web console menu, choose **Settings** > **Security**.
- 2. Click Edit > Change IPv6.
  - By default, the **All Allowed** option is selected.
- **3.** To block all IPv6 traffic, select **All Blocked**.
  - The IPv6 traffic is blocked only for workloads in the Enforced policy state. IPv6 traffic is allowed for workloads in the Build and Test policy states.
- 4. Click Save.
- **5.** To implement these changes, click the **Provision** icon at the top right of the PCE web console, and select **Pending Changes**.
  - The Provision page appears.
- **6.** Select the checkbox corresponding to the change or the **Change** checkbox to select all changes, and click **Provision** > **Confirm & Provision**.

## **Configure Shared SNAT Out of Public Clouds**

When you are using a public cloud such as Amazon Web Services or Microsoft Azure, you can choose between techniques for how public IP addresses are distributed.

- 1. From the PCE web console menu, choose **Settings** > **Security**.
- 2. In **Public Cloud Configuration**, under **NAT Detection**, choose one of the following options, depending on whether you are using 1:1 NAT or NAT gateways. If you are not sure which to choose, contact your Illumio Support representative.
  - Private Data Center or Public Cloud with 1:1 NAT, or
  - Public Cloud with SNAT/NAT Gateway.

## **Enable IP Forwarding**

(For Linux VENs only)

In PCE versions earlier than 21.5.10, IP forwarding is automatically enabled for hosts in a container cluster that is reported by Kubelink to the PCE or hosts explicitly set to use the Container Inherit Host Policy feature.

Starting in PCE version 21.5.10, you can enable IP forwarding on hosts without using any container segmentation features. To enable this feature, contact Illumio Support.

1. In the PCE web console, choose **Security** > **IP Forwarding**. The IP Forwarding tab appears if the feature is enabled.



#### NOTE

Use the API call to the PCE to enable this feature so it appears in the Security menu as an option.

2. In this tab, you can use labels and label groups to enable IP forwarding for the workloads that match the label combination. Use combinations of Role, Application, Environment, and Location labels and label groups in the same way that you would to specify workloads for any other purpose; for example, in a Rule or any of the tabs under the Security Settings page.

Workloads with IP forwarding enabled will configure the host firewall to allow all forwarded traffic without visibility, including traffic forwarded through the host.

## **SecureConnect Setup**

Enterprises have requirements to encrypt in transit data in many environments, particularly in PCI and other regulated environments. Encrypting in transit data is straightforward for an enterprise when the data is moving between datacenters. An enterprise can deploy dedicated security appliances (such as VPN concentrators) to implement IPsec-based communication across open untrusted networks.

However, what if an enterprise needs to encrypt in transit data within a VLAN, datacenter, or PCI environment, or from a cloud location to an enterprise datacenter? Deploying a dedicated security appliance to protect every workload is no longer feasible, especially in public cloud environments. Additionally, configuring and managing IPsec connections becomes more difficult as the number of hosts increases.

#### **SecureConnect Features**

SecureConnect has the following key features.

## **Supported Platforms**

SecureConnect works for connections between Linux workloads, between Windows workloads, and between Linux and Windows workloads.

## **IPsec Implementation**

SecureConnect implements a subset of the IPsec protocol called Encapsulating Security Payload (ESP), which provides confidentiality, data-origin authentication, connectionless integrity, an anti-replay service, and limited traffic-flow confidentiality.

In its implementation of ESP, SecureConnect uses IPsec transport mode. Using transport mode, only the original payload is encrypted between the workloads. The original IP header information is unchanged so all network routing remains the same. However, the protocol being used will be changed to reflect the transport mode (ESP).

Making this change causes no underlying interfaces to change or be created or any other underlying networking infrastructure changes. Using this approach simply encrypts the data between endpoint workloads.

If SecureConnect is unable to secure traffic between two workloads with IPsec, it will block unencrypted traffic when the policy was configured to encrypt that traffic.

#### **IKE Versions Used for SecureConnect**

SecureConnect connections between workloads use the following versions of Internet Key Exchange (IKE) based on workload operating system:

• Linux ↔ Linux: IKEv2

Windows ↔ Windows: IKEv1
Windows ↔ Linux: IKEv1

For a list of supported operating systems for managed workloads, see VEN OS Support and Package Dependencies on the Illumio Support portal.

#### **Existing IPsec Configuration on Windows Systems**

Installing a VEN on a Windows system does not change the existing Windows IPsec configuration, even though SecureConnect is not enabled. The VEN still captures all logging events (event.log, platform.log) from the Windows system that relate to IPsec thereby tracking all IPsec activity.

## **Performance**

The CPU processing power that a workload uses determines the capacity of the encryption. The packet size and throughput determine the amount of power that is required to process the encrypted traffic using this feature.

In practice, enabling SecureConnect for a workload is unlikely to cause a big spike in CPU processing or a decrease in network throughput. However, Illumio recommends benchmarking performance before enabling SecureConnect and comparing results after enabling it.

#### **Prerequisites, Limitations, and Caveats**

Before configuring your workloads to use SecureConnect, review the following prerequisites and limitations, and consider the following caveats.

## **VEN Versions**

To use PKI certificates with SecureConnect, your workloads must be running VEN version 17.2 or later.

## **Maximum Transmission Unit (MTU) Size**

IPsec connections cannot assemble fragmented packets. Therefore, a high MTU size can disrupt SecureConnect for the workloads running on that host.

Illumio recommends setting the MTU size at 1400 or lower when enabling SecureConnect for a workload

#### **Ports**

Enabling SecureConnect for a workload routes all traffic for that workload through the SecureConnect connection using ports 500/UDP and 4500/UDP for NAT traversal and for environments where ESP traffic is not allowed on the network (for example, when using Amazon Web Services). You must allow 500/UDP and 4500/UDP to traverse your network for SecureConnect.

## **Unsupported SecureConnect Usage**

SecureConnect is not supported in the following situations:

- SecureConnect cannot be used between a workload and unmanaged entities, such as the label "Any (0.0.0.0/0 and ::/0" (such as, the internet).
- SecureConnect is not supported on virtual services.
- SecureConnect is not supported on workloads in the Idle policy state. If you enable it for a rule that applies to workloads that are in both Idle and non-Idle policy states, you can impact the traffic between these workloads.
- SecureConnect is not supported on AIX and Solaris platforms.

#### **SecureConnect and Build and Test Policy States**

When you configure workloads to use SecureConnect be aware of the following caveat.

SecureConnect encrypts traffic for workloads running in all policy states except Idle. If misconfigured, you could inadvertently block traffic for workloads running in the Build and Test policy states.

### **SecureConnect Host-to-Host Encryption**

When you configure workloads to use SecureConnect be aware of the following caveat.

SecureConnect encrypts traffic between workloads on a host-to-host basis. Consider the following example.



In this example, it appears that enabling SecureConnect will only affect MySQL traffic. However, when you enable SecureConnect for a rule to encrypt traffic between a database workload and a web workload over port 3306, the traffic on all ports between the database and web workloads is protected by IPsec encryption.

## **Use Pre-Shared Keys with SecureConnect**

SecureConnect supports the use of pre-shared keys (generated by the PCE) or client-side PKI certificates for IKE authentication.

You can configure SecureConnect to use pre-shared keys (PSKs) to build IPsec tunnels that are automatically generated by the PCE. SecureConnect uses one key per organization. All the workloads in that organization share the one PSK. SecureConnect uses a randomly generated 64-character alpha-numeric string, for example:

#### c4aeb6230c508063db3e3e1fac185bea9c4d17b4642a87e091d11c9564fbd075

When SecureConnect is enabled for a workload, you can extract the PSK from a file in the /opt/illumio directory, where the VEN stores it. You cannot force the PCE to regenerate and apply a new PSK. If you feel the PSK has been compromised, contact Technical Support.



#### NOTE

Illumio customers accessing the PCE from the Illumio cloud can have multiple Organizations. However, the Illumio Core PCE does not support multiple Organizations when you have installed the PCE in your datacenter.

#### **Configure SecureConnect to Use Pre-Shared Keys**

You can configure SecureConnect to use pre-shared keys (PSKs) for IKE authentication and IPsec communication between managed workloads. SecureConnect uses one key per Organization. All the workloads in that organization share the one PSK. SecureConnect generates a random 64-character alpha-numeric string for this key.

- 1. From the PCE navigation menu, choose **Settings** > **Security Settings**.
- Choose Edit > Configure SecureConnect.
   The page refreshes with the settings for SecureConnect.
- **3.** In the Default IPsec Authority field, select the **PSK** option.
- 4. Click Save.

## **Use PKI Certificates with SecureConnect**

SecureConnect allows you to use client-side PKI certificates for IKE authentication and IPsec communication between managed workloads. If you have a certificate management infrastructure in place, you can leverage it for IKE authenticate between workloads because it provides higher security compared to using pre-shared keys (PSKs).

Certificate-based SecureConnect works for connections between Linux workloads, between Windows workloads, and between Linux and Windows workloads.

The IPsec configuration uses the certificate with the distinguished name from the issuer field that you specify during PCE configuration for IKE peer authentication.

## **Requirements and Caveats**

- You must have a PKI infrastructure to distribute, manage, and revoke certificates for your workloads. The PCE does not manage certificates or deliver them to your workloads.
- The PCE supports configuring only one global CA ID for your organization.
- Only use certificates obtained from trusted sources.
- The VEN on a workload uses a Certificate Authority ID (CA ID) to authenticate and establish a secure connection with a peer workload.
- Connected workloads must have CA identity certificates signed by the same root certificate authority. When workloads on either end of a connection use different CA IDs, the IKE negotiation between the workloads will fail and the workloads will not be able to communicate with each other.
- The certificates you deploy for PKI or IPsec must have the following properties: Leaf certificate X.509 field requirement
  - Version 3
  - Subject Name DN must contain Common Name (example: OU=VEN, CN=centos6.ilabs.io)
  - SubjectAltName (required for better compatibility) must contain an email address field that is identical to the Common Name of DN (example: DNS:centos6, email:centos6@ilabs.io)
  - · Must contain key usage with:
    - Digital Signature
    - Key Encipherment
    - Data Encipherment
    - Key Agreement
  - Must contain Extended key Usage with:
    - IPSec End System
    - IPSec User
    - TLS Web Server Authentication (optional for macOS x compatibility)
  - Must contain Authority Key Identifier

#### **Set up Certificates on Workloads**

To use PKI certificates with SecureConnect, you must set up certificates on your Windows and Linux workloads independently.

#### File Requirements

Requireme	nts
The global CA	certificate, either root or intermediate, in PEM or DER format
	NOTE On Linux, the issuer's certificate must be readable by the Illumio user.
	·

File	Requirements
pkcs12 con- tainer	Archive containing the public key, private key, and identity certificate generated for the workload host.
	Sign the identity certificate using the global root certificate.
	You can password protect the container and private key but do not password protect the public key.

Installation Locations

#### Windows Store

Use the Windows OS (for example Microsoft Management Console (MMC)) to import the files into these locations of the local machine store (not into your user store).

- Root certificate: Trusted Root Certificate Store
- pkcs12 container: Personal ("My") certificate store

Linux Directories

Copy the files into the following Linux directories. (You cannot change these directories.)

- Root certificate: /opt/illumio\_ven/etc/ipsed.d/cacert
- pkcs12 container: /opt/illumio\_ven/etc/ipsed.d/private

#### **Configure PKI Certificates**

You can use client-side PKI certificates for IKE authentication and IPsec communication between managed workloads. The PCE supports configuring only one global CA ID for your organization. Configuring SecureConnect to use certificates applies the setting to All Roles, All Applications, All Environments, and All Locations.

Configuring SecureConnect to use PKI certificates in the global Security Settings page does not manage certificates for your organization or deliver them to your workloads.



## NOTE

You must set up certificates on your Windows and Linux workloads independently. For information, see Requirements for Certificate Setup on Workloads [191].

- 1. Go to Settings > Security Settings.
- 2. Choose **Edit** > **Configure SecureConnect**.
- 3. In the Default IPsec Authority field, select Certificate Authority.
- **4.** In the Global Certificate ID field, enter the distinguished name from the Issuer field of your trusted root certificate. (This certificate is used globally for all workloads in your organization enabled with SecureConnect.)

#### 5. Click Save.

## **AdminConnect Setup**

Relationship-based access control rules often use IP addresses to convey identity. This authentication method can be effective. However, in certain environments, using IP addresses to establish identity is not advisable.

When you enforce policy on servers for clients that change their IP addresses frequently, the policy enforcement points (PEPs) continuously need to update security rules for IP address changes. These frequent changes can cause performance and scale challenges, and the ipsets of protected workloads to churn.

Additionally, using IP addresses for authentication is vulnerable to IP address spoofing. For example, server A can connect to server B because the PEP uses IP addresses in packets to determine when connections originate from server A. However, in some environments, bad actors can spoof IP addresses and impact the PEP at server B so that it mistakes a connection as coming from server A.

Illumio designed its AdminConnect (Machine Authentication) feature with these types of environments in mind. Using AdminConnect, you can control access to network resources based on Public Key Infrastructure (PKI) certificates. Because the feature bases identity on cryptographic identity associated with the certificates and not IP addresses, mapping users to IP addresses (common for firewall configuration) is not required.

With AdminConnect, a workload can use the certificates-based identity of a client to verify its authenticity before allowing it to connect.

## **Features of AdminConnect**

Cross Platform

Microsoft Windows provides strong support for access control based on PKI certificates assigned to Windows machines. Modern datacenters, however, must support heterogeneous environments. Consequently, Illumio designed AdminConnect to support Windows and Linux servers and Windows laptop clients.

AdminConnect and Data Encryption

When only AdminConnect is enabled, data traffic does not use ESP encryption. This ensures that data is in cleartext even though it is encapsulated in an ESP packet.

When AdminConnect and SecureConnect are enabled for a rule, the ESP packets are encrypted.

Ease of Deployment

Enabling AdminConnect for identity-based authentication is easy because it is a software solution and it does not require deploying any network choke points such as firewalls. It also

does not require you to deploy expensive solutions such as Virtual Desktop Infrastructure (VDI) or bastion hosts to control access to critical systems in your datacenters.

## **Prerequisites and Limitations**

Prerequisites

You must meet the following prerequisites to use AdminConnect:

- You must configure SecureConnect to use certificate-based authentication because both features rely on the same PKI certificate infrastructure. See the following topics for more information:
  - Configure SecureConnect to Use Certificates [192]
  - Requirements for Certificate Setup on Workloads [191]
  - Certificates for AdminConnect [194]
- • AdminConnect must be used with VEN version 17.3 and later.
  - AdminConnect supports Linux/Windows IKE v1 (client only) with unmanaged workloads.

#### Limitations

You cannot enable AdminConnect for the following types of rules:

- Rules that use All services
- Rules with virtual services in providers or consumers
- Rules with IP lists as providers or consumers
- Stateless rules

AdminConnect is not supported in these situations:

- AdminConnect does not support "TCP -1" (TCP all ports) and "UDP -1" (UDP all ports) services.
- You cannot use Windows Server 2008 R2 or earlier versions as an AdminConnect server.
- Windows Server does not support more than four IKE/IPsec security associations (SAs) concurrently from the same Linux peer (IP addresses).

## **Certificates for AdminConnect**

AdminConnect relies on PKI certificates for relationship-based access control of workloads.

The feature uses the same certificate infrastructure enabled for SecureConnect. If you have not set up certificate for SecureConnect, see Configure SecureConnect to Use Certificates [192] and Requirements for Certificate Setup on Workloads [191] for information.

The same prerequisites and limitations for certificate set up apply for AdminConnect. Additionally, because you can use AdminConnect to control access for laptops, certificates on laptops must meet these additional requirements:

- The certificate must have a unique Subject Name and Subject Alt Name.
- The certificate must be enabled with all extended key usage to check trust validation.

## **Secure Laptops with AdminConnect**

You can use Illumio to authenticate laptops and grant them access to managed workloads. To manage a laptop with AdminConnect, complete the following tasks:

- 1. Deploy a PKI certificate on the laptop. See Certificates for AdminConnect. [194]
- 2. Add the laptop to the PCE by creating an unmanaged workload and assign the appropriate labels to it to be used for rule writing
- **3.** Create rules using those labels to grant access to the managed workloads. For information, see Enable AdminConnect for a Rule in Security Policy Guide.
- 4. Configure IPsec on a laptop.

To add a laptop to the PCE by creating an unmanaged workload:

To manage a laptop with AdminConnect, add the laptop to the PCE as an unmanaged workload.

From the PCE web console menu, choose Workloads > Add > Add Unmanaged Workload.

The Workloads - Add Unmanaged Workload page appears.

- **2.** Complete the fields in the General, Labels, Attributes, and Processes sections. See Add an Unmanaged Workload in Security Policy Guide for information.
- **3.** In the Machine Authentication ID field, enter all or part of the DN string from the Issuer field of the end entity certificate (CA Subject Name). For example: CN=win2k12, O=Illumio, OU=Portal, ST=CA, C=US, L=Sunnyvale



#### TIP

Enter the exact string that you get from the openss1 command output.

4. Click Save.

To configure IPsec on a laptop:

To use the AdminConnect feature with laptops in your organization, you must configure IPsec for these clients.

See the Microsoft Technet article Netsh Commands for Internet Protocol Security (IPsec) for information about using netsh to configure IPsec.

See also the following examples for information about the IPsec settings required to manage laptops with the AdminConnect feature.

PS C:\WINDOWS\system32> netsh advfirewall show global

Global Settings:

-----

IPsec:

StrongCRLCheck 0:Disabled SAIdleTimeMin 5min

DefaultExemptions NeighborDiscovery, DHCP

IPsecThroughNAT Server and client behind NAT

AuthzUserGrp None
AuthzComputerGrp None
AuthzUserGrpTransport None
AuthzComputerGrpTransport None

StatefulFTP Enable StatefulPPTP Enable

Main Mode:

KeyLifetime 60min,0sess

SecMethods ECDHP384-AES256-SHA384

ForceDH Yes

Categories:

BootTimeRuleCategory Windows Firewall
FirewallRuleCategory Windows Firewall
StealthRuleCategory Windows Firewall
ConSecRuleCategory Windows Firewall

Ok.

PS C:\WINDOWS\system32> netsh advfirewall consec show rule name=all

Rule Name: telnet

\_\_\_\_\_\_

Enabled: Yes

Profiles: Domain, Private, Public

Type: Static Mode: Transport

Endpoint1: Any

Endpoint2:

10.6.3.189/32,10.6.4.35/32,192.168.41.163/32
Port1: Any
Port2: 23
Protocol: TCP

Action: RequireInRequireOut
Authl: ComputerKerb,ComputerCert

Auth1CAName: CN=MACA, O=Company, OU=engineering,

S=CA, C=US, L=Sunnyvale, E=user@sample.com
AuthlCertMapping: No
AuthlExcludeCAName: No

AuthlCertType: Intermediate

AuthlHealthCert: No

MainModeSecMethods: ECDHP384-AES256-SHA384

QuickModeSecMethods: ESP:SHA1-AES256+60min+100256kb

ApplyAuthorization: No

Ok.

# **PCE Troubleshooting**

This section describes issues that can arise during ongoing PCE operation and how to resolve them.

## **PCE Administration Troubleshooting Scenarios**

This section describes issues that can arise during ongoing PCE operations and how to resolve them.

## Transaction ID Wraparound in PostgreSQL Database

Symptom:

The PCE uses PostgreSQL databases to store data. Under certain conditions, PostgreSQL may issue warnings about transaction ID wraparound.



#### WARNING

These messages indicate a very serious condition. The database is not functional, and the PCE will not work as expected. Immediate remediation from Illumio Support is required.

In illumio-pce.log and postgresql.log, look for messages like the following:

ERROR: database is not accepting commands to avoid wraparound data loss in database "<database\_name>"

Stop the postmaster and vacuum that database in single-user mode.

Cause:

In a PostgreSQL database, transaction wraparound (also known as transaction ID exhaustion) can occur if a very large number of transactions have occurred and the transaction ID reaches its maximum possible value and is forced to begin again at zero. As a result, transactions from the past suddenly have a higher transaction ID than the current ID, and therefore appear to be in the future – and therefore inaccessible. The result is extreme loss of data. The database stops accepting requests. The only way to recover from transaction ID wraparound is to manually execute commands.

To avoid this situation, PostgreSQL provides an autovacuum feature which recovers disk space, by doing things like removing dead row versions, before transaction ID wraparound can occur. The PCE databases use the PostgreSQL autovacuum feature to prevent transaction wraparound. However, in the following situations, autovacuum might not succeed:

- · Vacuum did not run on the tables.
- Temporary tables remained in the database, rather than being dropped as they should be. Temporary tables are not vacuumed.

For details about autovacuum and transaction ID wraparound, see the PostgreSQL documentation page Preventing Transaction ID Wraparound Failures.

Monitoring and Diagnosis:

Use the dbcheck tool to periodically monitor the system for early detection of any potential transaction ID wraparound condition. It is vital to act before the situation develops into transaction ID wraparound failure. See Monitor Database Replication [142].



## **WARNING**

If you find messages that indicate a risk of transaction wraparound, immediately contact Illumio Support for assistance.

# **VEN Administration Guide 23.2**

## **Overview of VEN Administration**

This section describes the VEN characteristics and the VEN commands that you use to administer the VEN on the workloads in your environment after you have installed the VEN and the workloads are managed by Illumio Core.

## **About This Administration Guide**

This guide shows you how use illumio-ven-ctl (for Linux, AIX, and Solaris) and illumio-ven-ctl.psl (for Windows) and other commands to administer the Virtual Enforcement Node (VEN) on a managed workload for operational tasks such as start/stop, suspend, and other functions on the VEN and with the Policy Compute Engine (PCE) in an on-premise deployment.

#### **How To Use This Guide**

The VEN Administration Guide has several main divisions:

- Overview of VEN Software Architecture and Description of Components.
- VEN deployment models
- Command-line-oriented sections with syntax examples for illumio-ven-ctl for on-work-load managing the VEN.
- Basic Theory of VEN Operations.

## **Before Reading This Guide**

Illumio recommends that you be familiar with the following topics before you follow the procedures in this guide:

- Your organization's security goals
- The Illumio Core platform
- General computer system administration of Linux and Windows operating systems, including startup/shutdown, and common processes or services
- Linux/UNIX shell (bash) and Windows PowerShell
- TCP/IP networks, including protocols and well-known ports

## **Notational Conventions in This Guide**

- Newly introduced terminology is italicized. Example: *activation code* (also known as pairing key)
- Command-line examples are monospace. Example: illumio-ven-ctl --activate
- Arguments on command lines are monospace italics. Example: illumio-ven-ctl --activate activation\_code
- In some examples, the output might be shown across several lines but is actually on one single line.
- Command input or output lines not essential to an example are sometimes omitted, as indicated by three periods in a row. Example:

```
... some command or command output ...
```

## **VEN Architecture and Components**

This topic describes the basic concepts relevant to the VEN and for Illumio Core software. Additionally, it explains the VEN architecture and components.

## **Basic Concepts for Illumio Core Software**

- A workload is bare metal server, virtual machine (VM), or a container.
- The VEN is a lightweight, multiple-process application with a minimal footprint that runs on a workload.
- Native network interfaces are also know as the OS's firewall platform.

The VEN manages firewalls at an OS level, so you must install a VEN on every bare-metal server or virtual machine you want to secure. However, you only need to install a single VEN to secure all the containers on a machine. A secured workload is known as a *managed workload*.

Once installed, the VEN performs the following tasks:

- · Interacts with the native networking interfaces to collect traffic flow data.
- Enforces policy received from the PCE.
- Only consumes CPU as needed to calculate or optimize and apply the firewall, and so on, while remaining idle in the background as much as possible.
- Uses configurable operational modes to minimize the impact to workloads.
- Summarizes the collected traffic-flow data, then reports it to the PCE.

You control the VEN's operations through the PCE web console or from the command line on the machine with the installed VEN itself.

## **Activation or Pairing**

The terms "activation" and "pairing" indicate the same function from different perspectives, namely putting the workload under managed control by the PCE:

- The VEN sees itself as activated or deactivated.
- The PCE sees a VEN as paired or unpaired.

#### Pairing and Activating the VEN


1	The VEN is installed.	The PCE remains unaware the VEN is present.
2	The VEN and the PCE are paired.	The PCE uses a pairing key (activation code) to pair with the VEN. After pairing, the PCE becomes aware of the VEN.
3	The VEN is activated.	The VEN uses an activation code generated by the PCE. After activation, the VEN is ready to function.

## **Unpairing or Deactivating the VEN**

- · When the PCE is unpaired with the VEN, the VEN is deactivated and uninstalled.
- When the VEN is deactivated, it remains installed and can be reactivated.
- Use the illumio-ven-ctl command to deactivate the VEN. You can't deactivate a VEN by using the PCE UI; you may only unpair it.

## **VEN Architectural Diagram**

At startup, the VEN instantiates the following processes or services.

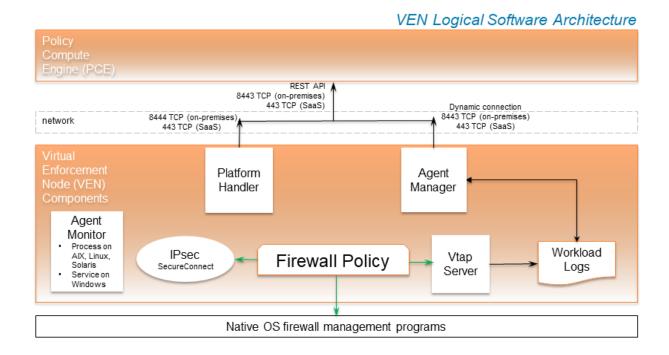

- 1. The VEN reports to the PCE the status of the workloads.
- 2. The PCE computes a unique security policy for each managed workload and transmits it to the VEN.
- **3.** The VEN receives the policy and it programs a firewall by using the firewall platform of the OS. The VEN supports the following firewall platforms:
  - a. iptables (older Linux)
  - **b.** nftables (newer Linux)
  - c. Packet Filter (newer Solaris)
  - **d.** Ipfilter (older Solaris)
  - e. Windows Filtering Platform (Windows)
- **4.** When the VEN is finished programming a firewall for each workload, it reports back to the PCE. The PCE then considers these workloads as having a *synced* policy.

## Main Components of the VEN

VEN Process	Description	Linux/ AIX/ Solaris User	Windows User
AgentMan- ager	<ul> <li>Manages PCE-driven uninstallation and upgrades.</li> <li>All actions relating to active service reporting.</li> <li>Mines the workload's system information, such as network interfaces, and listening processes, and sends them to the PCE.</li> <li>Sends heartbeats to the PCE.</li> <li>Calls netstat periodically for connection status through a shell script or with a direct program call.</li> </ul>	root	LOCAL SYSTEM
Platform- Handler	<ul><li>Firewall configuration via native OS mechanisms.</li><li>Tamper detection and protection.</li><li>Upgrades and uninstallation.</li></ul>	root	LOCAL SYSTEM
VtapServer	<ul> <li>Windows: VTAP runs under the "Local Service" account.</li> <li>Retrieves traffic flow data from the ilowfp kernel mode driver (Windows) or firewall (other platforms) and generates flow logs in a database.</li> <li>Receives events from the firewall on blocked packets and allowed connections.</li> </ul>	root	LOCAL SERVICE
AgentMo- nitor	<ul> <li>Service account: NT Authority/Local System</li> <li>Monitors VEN processes or services and restarts them when necessary.</li> </ul>	root	LOCAL SYSTEM

## **SecureConnect Architecture**

Illumio's optional SecureConnect feature configures Internet Protocol Security (IPsec), a set of protocols to enforce security for IP networks. IPsec can be configured to use cryptography. For more information, see "SecureConnect" in Security Policy Guide.

IPsec runs as root in LOCAL SYSTEM.

## **VEN Interactions with Files and Components**

The VEN interacts with files and components for installation, root tasks, and initialization tasks. Minor tasks include working with install logs, the registry key, and read-only access to machine resources.

The VEN interacts with the following files and components:

## Linux/AIX/Solaris

Function	Description	File/Location
Root file	DATA_ROOT is a variable that points to a filepath.	/opt/illumio_ven_data(by default)
Package repository	INSTALL_ROOT is a variable that points to a filepath.	/opt/illumio_ven(by default)
System initialization	Initializes system	/etc/illumio_ven (typically)

Function	Description	File/Location
Persistent install log	Persistent install log	/var/log/illumio.log
Firewall	Dynamically adds IPs to ipsets:	Snoop on special packets.
	Strongswan IPSec system.	Snoop on Security Associations.
	Read system files (e.g., netstat).	/proc

## **Windows**

Function	Description	File/Location
Runtime data files	DATAFOLDER is an installer parameter that points to a filepath.	c:\ProgramData\Illumio(by default)
Executable program files	INSTALLFOLDER is an installer parameter that points to a filepath.	c:\Program Files\Illumio(by default)
Install log	Persistent install log.	c:Windows\Temp\illumio.log(by default)
		c:Windows\Temp\Illumio_VEN_Install.log (by default)
		c:Windows\Temp\Illumio_VEN_Uninstall.log (by default)
System initialization	N/A	N/A
Firewall	For network filtering.	Windows Filtering Platform

# Management Interfaces for the VEN and PCE

The diagram below is a logical view of the management interfaces to the PCE and VEN.

# REST API B443 TCP (SassS) Policy Compute Engine (PCE) Commandine B443 TCP (SassS) Policy Compute Engine (PCE) Commandine Dynamic connection 8443 TCP (SassS) A43 TCP (SassS) VEN VEN VEN advanced CLI tool on your local computer

PCE and VEN Management Interfaces

Interface	Notes	See
PCE web console	With the PCE web console, you can perform many common tasks for managing Illumio Core.	Security Policy Guide
PCE com- mand line	Use of the command line directly on the PCE. A primary management tool on the PCE is the command line illumio-pce-ctl control script. You can perform many common tasks for managing the Illumio Core on the PCE command line, including installing and updating the VEN.	PCE Administration Guide
PCE ad- vanced com- mand-line	From your own local computer, you can run the PCE advanced CLI tool for many management tasks on the PCE's resource objects:	PCE CLI Tool Guide
tool	<ul> <li>Importing vulnerability data for analysis with Illumination®.</li> <li>Importing/exporting security policy rules.</li> <li>Managing security policy rules and rulesets, labels, and other resources.</li> </ul>	
REST API	With the Illumio Core REST API, you can perform many common management tasks. One use is to automate the management of large groups of workloads, rather than each workload individually. The endpoint for REST API requests is the PCE itself, not the workload; the REST API does not communicate directly with the VEN.	REST API Developer Guide
VEN com- mand line	A primary management tool on the VEN command line is the illumioven-ctl control script.	VEN Administration Guide

# **VEN Supported Interfaces**

## **Windows**

- Ethernet
- Tunnel
- WLAN (Endpoint only)
- PPP (Endpoint only)

## Linux/Unix

- Ethernet
- Tunnel
- Infiniband
- GRE
- Loopback

## **About VEN Administration on Workloads**

The following topic explains the VEN states and characteristics necessary to understand when administering the VEN on workloads.

## **VEN Software Management from PCE**

The ability to manage VEN software and install the VEN by using the PCE has been enhanced in this release in the following ways:

- You can upgrade all VENs or just a subset of VENs from the PCE.
- You can upgrade VENs by using filters, such as for labels, OSs, VEN health, IP address, current VEN version.
- When upgrading, the PCE informs you of the version the VENs will be upgraded to.
- You can monitor and troubleshoot VEN upgrade issues.
- You can perform VEN version reporting and compatibility.

## **VEN Proxy Support on Linux, AIX, and Solaris**

VEN proxy support includes Linux, AIX, Solaris, and Windows devices.

For information, see "VEN Proxy Support" in VEN Installation and Upgrade Guide

## Support on IBM Z with RHEL 7 and RHEL 8

IBM  $Z^{\circ}$  is a family of modern z/Architecture hardware that runs z/OS, Linux, z/TPF, z/VM and IBM Z systems software.

Illumio supports installing and operating the VEN on IBM Z systems running Red Hat Enterprise Linux 7 (RHEL 7) and RHEL 8. Additionally, Illumio supports the VEN running on IBM Z systems using both KVM and z/VM as hypervisors.

## **Support on SLES 11 SP2**

The VEN can be installed on systems running SLES 11 SP2 when the following packages are installed:

From the SLES 11 SP2 Latest Updates:

- libipset2-6.12-0.7.7.1
- ipset-6.12-0.7.7.1
- libmnl0-1.0.3-0.5.4
- kernel-default-3.0.101-0.7.17.1

• kernel-default-base-3.0.101-0.7.17.1

From the SLES 11 SP4 DVD:

- libxtables9-1.4.16.3-1.37
- libiptc0-1.4.16.3-1.37
- iptables-1.4.16.3-1.37
- libnfnetlink0-1.0.0+git1-9.5.56

## **Debian 11 Support**

Starting from Release 21.2.3, Illumio supports installing and operating the VEN on the Debian 11 operating system.

## **Workload Policy States**

After activation, the VEN can be in one of the following policy states. The VEN policy state determines how the rules received from the PCE affect the network communication of a workload.

Change the policy state of the VEN by modifying settings in the PCE or by making calls to the REST API.

### **VEN Enforcement Characteristics**

Policy enforcement is managed through both enforcement states and visibility states to specify how much data the VEN collects from a workload.

The following table summarizes the key enforcement characteristics of the VEN:

Work- load En- force- ment State	VEN Mode	VEN Visibility Level	Log Traffic
Idle	Idle	Limited	Limited
Visibility Only	Illumina- ted	Off	VEN does not log traffic connection information
		Blocked	VEN logs connection information for blocked and potentially blocked traffic only
		Blocked+Allowed	
			VEN logs connection information for allowed, blocked,
		Enhanced Data Collection	and potentially blocked traffic
			VEN logs byte counts in addition to connection details for allowed, blocked, and potentially blocked traffic

Work- load En- force- ment State	VEN Mode	VEN Visibility Level	Log Traffic
Selective	Selective	Off	VEN does not log traffic connection information
		Blocked	VEN logs connection information for blocked and potentially blocked traffic only
		Blocked+Allowed  Enhanced Data Collection	VEN logs connection information for allowed, blocked, and potentially blocked traffic  VEN logs byte counts in addition to connection details for allowed, blocked, and potentially blocked traffic
Full	Enforced	Off	VEN does not log traffic connection information
		Blocked+Allowed	VEN logs connection information for blocked and potentially blocked traffic only
		Enhanced Data Collection	VEN logs connection information for allowed, blocked, and potentially blocked traffic
			VEN logs byte counts in addition to connection details for allowed, blocked, and potentially blocked traffic

For more information, see "Ways to Enforce Policy" in the Security Policy Guide.

## **VEN Policy Sync States**

To help you administer and troubleshoot the VEN, it reports many Policy Sync states. Here are the Policy Sync states and their definitions:

• Active (Syncing): Policy is currently being applied to the workload. Appears if the VEN is not currently heartbeating but the PCE has not received a goodbye event from the VN, and the disconnect & quarantine threshold timer has not yet been reached. This is appropriate because, from the PCE's point of view, the VEN status is not stopped and the policy sync status is Syncing. Compare with Syncing [207].



#### NOTE

A workload may also have a status of Active (Syncing) if there is a high rate of policy changes taking place, either from user provisioning actions or from VEN environmental policy changes (for example, new VENs being activated or old VENs being deactivated/unpaired).

- **Syncing:** Appears if the PCE has received a goodbye event from a VEN but the decommission offline timer threshold has not yet been reached. This is appropriate because the VEN, although stopped, is not yet removed from policy and therefore has not yet been marked as **Offline**. When the offline timer expires, the VEN's status transitions to **Stopped** and its IP is removed from policy. Compare with Active (Syncing) [207].
- Active: The most recent policy provisioning was successful, no unwanted changes to the workload's firewall have been reported, none of the configured SecureConnect connections are in an erroneous state, and all VEN processes are running correctly.

- For more information on SecureConnect, see Security Policy Guide.
- **Staged**:The PCE has successfully sent policy to the VEN, and it is staged and scheduled to be applied at a later time. This state only appears when you have configured the Policy Update Mode for the workload to use Static Policy. See Static Policy and Staged Policy for information. For information, see "Types of Illumio Policy" in the Security Policy Guide.
- **Error**: One of the following errors has been reported by the VEN:
  - The most recent policy provisioning has failed.
  - Unwanted changes to the workload's firewall have been reported.
  - At least one VEN process is not running correctly.
  - There is a SecureConnect or Machine Authentication policy, but leaf certificates are not set up properly.
- **Warning**: At least one SecureConnect connection is in an erroneous state, and either the most recent policy provisioning was successful or no unwanted changes to the workload's firewall have been reported.
- **Suspended**: Used by admins to debug. Rules programmed into the platform firewall (including custom iptables rules) are removed completely. No Illumio-related processes are running on the workload.

## **VEN Health Status on Workloads**

The VEN health status on the workload's details page displays information related to the current state of VEN connectivity, the most recently provisioned policy changes to that workload, and any errors reported by the VEN.

These errors include any unwanted changes to the workload's firewall settings, any Secure-Connect functionality issues, or any VEN process health errors.

To view a workload's VEN health status, view the VEN section on the **Summary** tab for the workload's details page.

#### **VEN Process Health**

The health status of the VEN can be monitored from the PCE web console. If for any reason one or more Illumio processes on the workload are not running, the VEN reports the error to the PCE. The PCE marks the workload as in an error state and adds a notification on the Workloads page. It also logs an audit event that includes the Illumio processes which were not running on the workload.

#### **Workload Clone Alerts**

Workloads can be filtered according to whether a cloned node has been detected. On Windows and Linux, when the PCE detects a cloned node, it notifies the VEN through a heartbeat. The VEN verifies that a clone exists, prevents it from being activated, and deletes it.

In the Illumio REST API, detection is done by using the clone\_detected state. In the PCE web console UI, search the workloads list by filtering on, "clone detected." If there are workloads in the clone\_detected state, a red banner (similar to workloads in suspension) is displayed at the top of the workload list page.



#### NOTE

#### **Automatic Cloned VEN Remediation**

For on-prem domain joined Windows workloads, cloned VENs support automatic clone remediation by detecting changes to the workload's domain Security identifier (SID). After the VEN reports such changes to the PCE, the PCE tells the clone to re-activate itself, after which the cloned VEN is remediated and becomes a distinct agent from the original VEN.

## **Stopped VEN Status**

The stopped status has the following affect on the PCE web console UI:

- On the Workload list page, the "Connectivity" column is replaced with "Status."
- On the Workload details pages, "VEN Connectivity" is changed to "VEN status."
- You can filter the Workload list page by the new VEN stopped status.

## **Aggressive Tampering Protection for nftables**

Firewall changes that are not explicitly configured by the VEN are logged as tampering attempts. This feature extends Release 19.3 nftables support with the inclusion of aggressive tampering protection.

## **VEN File Settings Option**

In 21.2.1, the VEN IPFilter state table supports a new option for AIX workloads to support traffic from NES servers:

VEN File Setting: IPFILTER\_TCPCLOSED=<value>

ipfliter Setting:fr\_tcpclosed=<value>

For more information about this option, see "VEN Activate Command Reference" in the VEN Installation and Upgrade Guide.

## Windows VEN Proxy Fallback Enhancement

Starting from Illumio Core 21.2.1 and 21.2.2, the VEN automatically detects a web proxy. However, it always attempts to connect directly to the PCE first. In this release, Illumio enhanced the heuristic in the VEN for falling back to the configured web proxy. After an attempt fails to connect to the PCE directly due to an HTTPS intercepting proxy, the VEN falls back to use the configured web proxy.

## **Label-based Security Setting for IP Forwarding**

Illumio has enabled IP forwarding to hosts running Linux. A container networking solution routes the traffic to the VMs. To configure IP forwarding, use the new IP Forwarding tab in the PCE web console. In this tab, you can use labels and label groups to enable IP forwarding for the workloads that match the label combination.

To enable this feature, contact Illumio Support. For details about how to set up IP forwarding for workloads, see "Connectivity Settings" in the PCE Administration Guide.

## Uninterrupted Traffic Between the VEN and the PCE

The VEN implementation provides an extra layer of self-protection that prevents any erroneous policy from being applied to the VEN. The VEN employs a defensive approach that reviews policies before applying them. In case the VEN detects that the new policy may disrupt communications between the VEN and the PCE, the VEN automatically isolates that policy and logs an error in the event log. The VEN then continues to communicate with the PCE using the existing functional policy.

## **IPv6 Support and Features for the VEN**

In Illumio Core 20.2.0 and later releases, the VEN supports both IPv4 and Ipv6 address versions and the IP address version appears correctly in the PCE; for example, in the Workload section of the VEN summary page in the PCE web console.

You can configure how the PCE treats IPv6 traffic from workloads. For more information, see "Allow or Block IPv6 Traffic" in the PCE Administration Guide.

The VEN supports IPv6 in the following ways.

## IPv6 is Enabled by Default on Datacenter VENs

Release 20.2.0 and later support configuring inbound or outbound IPv6 traffic by organization (ORG). In previous releases, you are only able to block all, or allow all IPv6 traffic by organization.

The default settings are as follows:

- If the previous ORG-wide IPv6 policy is to *block all* IPv6 traffic, then this setting is *preserved*.
- If the previous ORG-wide IPv6 policy is to allow all IPv6 traffic, then this setting is not preserved.

#### **IPv6 Support for Linux and Windows VENs**

Beginning with Release 20.1, the Linux and Windows VENs support IPv6 rules.

#### **VEN Compatibility Report for IPv6 Support**

Illumio supports IPv6 for workloads. This includes providing a warning in the Compatibility Report. The Compatibility Report is used to detect the possible issues before moving VEN out of idle state. See VEN "Compatibility Check" in the VEN Installation and Upgrade Guide. In this release, Illumio updated the options in the Compatibility Report to increase it's usability.

The following command and command options are supported:

• On Linux and SunOS, this command option is available regardless of whether IPv6 is enabled:

## · lpv6\_forwarding\_enabled

- At least 1 iptables forwarding rule is detected in the IPv6 forwarding chain. VEN removes existing iptables rules in the non-Idle policy state.
- On Windows, we do not support all IPv6 transition tunnels that is a part of the IPv6 transition technology (RFC 4213). The following options are available:

## · teredo\_tunneling\_enabled

- Teredo tunneling allows for IPv6 connectivity.
- Teredo is an IPv6 transition tunnel.
- We do not report on Teredo adapters.

## · IPv6 enabled

- Continues to be supported.
- Detects potential transition technology usage on Windows.

## **VEN Features by Initial Release**

The following tables list key Illumio Core features by their introductory release.

## **VEN Features in Release Pre-19.3.0**

Feature	Initial Release
Firewall coexistence	Pre-19.3.0
illumio-ven-ctl start/stop/activate/unpair	Pre-19.3.0
illumio-ven-ctl unpair open saved recommen- ded	Pre-19.3.0
illumio-ven-ctl suspend	Pre-19.3.0
IPSec (SecureConnect)	Pre-19.3.0
Kerberos PKI-based Pairing on Solaris/AIX	Pre-19.3.0
PCE Repo Upgrade	Pre-19.3.0
Process-based Policies	Pre-19.3.0
Solaris Zone Support	Pre-19.3.0
Support report	Pre-19.3.0

#### **VEN Features in Release 19.3.x**

Feature	Initial Release
Compatibility Report for IPv6 Support	19.3
Custom iptable Rules	19.3
Easy installation of VEN on container hosts	19.3
Ignored Interfaces on Windows VENs	19.3

Feature	Initial Release			
Management of Conntrack Table Size	19.3			
Modes: idle, illuminated, enforced	19.3			
nftables for RHEL 8	19.3			
Solaris 11.4 Support	19.3			
Support Reports New Options	19.3			
Faster Supercluster Full Restore	19.3.0			
FQDN policy on Domain controller/DNS server	19.3.0			
State Table Sizes on AIX and Solaris	19.3.0			
illumio-ven-ctl deactivate	19.3.0			
CRI-O Support	19.3.1			
Loadbalancer TCP port 8302 and	19.3.1			
TCP+UDP port 8302 Enhancements				
Docker/ContainerD/CRIO	19.3.1			
SLES on Power Series hardware	19.3.2			
Oracle Exadata Support	19.3.4			
Oracle ZDLRA Support	19.3.4			
FQDN-Based Rules Enhancements	19.3.5			
LDAP Authentication	19.3.5			
Aggressive Tampering Protection for nftables	19.3.6			
Illumio Core REST API	19.3.6			
Debian 11 Support	19.3.7			
IBM Z Support	19.3.7			

# **VEN Features in Release 20.x**

Feature	Initial Release
Agent Monitor	20.1.0
REJECT Rules	20.1.0
Workloads and VENs Separation	20.1.0

Feature	Initial Release
Flow Duration Attributes	20.2.0
IPv6 for Linux and Windows VENs	20.2.0
IPv6 for VEN	20.2.0
IPv6 is Enabled by Default on Datacenter VENs	20.2.0
Software Management from PCE	20.2.0
Stopped Status	20.2.0
Tamper Detection	20.2.0
Clone Detection	20.2.0 (Edge 20.1, Core 20.2)
Selective Enforcement	20.2.0-PCE

## **VEN Features in Release 21.x**

Feature	Initial Release
Core 21.2.0, Illumio previewed the Reports feature	21.2.0
Enforcement Boundaries	21.2.0
Linux Pairing Script Activation for Proxy Servers	21.2.0
Network-Specific Policy	21.2.0
Uninterrupted Traffic between the VEN and the PCE	21.2.0
Network_deny List	21.2.0-PCE
Adaptive User Segmentation	21.2.0-VEN
Explorer Allows Label Search of All Types	21.2.1
Open Source Package Updates for 21.2.1	21.2.1
RHEL 8 support for PCE	21.2.1
Supercluster 8-Region Support in 21.2.1	21.2.1
Syslog Forwarding Change	21.2.1
Threshold Configuration Settings	21.2.1
File Settings Option	21.2.1
VEN Package Format Changes	21.2.1
Proxy Fallback Enhancement on Windows	21.2.4

Feature	Initial Release
Robustness and Reliability	21.5.0
Run as a Different User with AUS on Windows	21.5.0
IBM Z with RHEL 7 and RHEL 8	21.5.11
Label-based Security Setting for IP Forwarding	21.5.11

## **VEN Features in Release 21.x-C (Container)**

Feature	Initial Release
Containerized VEN	21.2.0-C VEN
Containerized VEN Base Image	21.2.1-C-VEN

## **VEN Features in Release 22.x**

Feature	Initial Release
Advanced Diags (strace/tcpdump)	22.5.0
Configurable Time for Heartbeat Warning Events	22.2.0
Disable and Enable Enforcement Boundaries	22.2.0
Essential Rule Coverage in Illumination and Explorer	22.2.0
Firewall Script Logging	22.2.0
Traffic Flow Query Report	22.2.0
Wireless Connections and VPNs	22.2.0

## **VEN Features in Release 23.x**

Feature	Initial Release
Extended RHEL 5 Support	23.2.0
Configurable enforcement node type (server or endpoint) in pairing profile	23.2.0

# **Major VEN Features by Supported OS**

The following table lists key VEN features by supported platform.

Fea- ture	Win- dows	Win- dows Edge	Li- nux	RHEL 5	C- VEN	Cen- tOS8	AIX	So- la- ris	Ma- cOS (End- point)
Firewall	WFP	WFP	IPta- bles	IPtables	IPta- bles	NFTa- bles	IPFil- ter	IP- Fil- ter/P F	PF
Firewall coexis- tence	✓	✓	✓	✓	✓	✓	-	-	✓
Contain- er sup- port	-	-	✓	✓	✓	✓	-	-	-
IPv6	✓	✓	✓	-	✓	✓	-	✓	✓
PCE re- po up- grade	✓	✓	✓	✓	-	✓	-	-	✓
Aggres- sive Tamper- ing De- tection	✓	✓	√	✓	-	-	-	-	-
Process- based policies	✓	✓	-	-	-	-	-	-	-
Extended process path/args (vtap)	✓	✓	✓	✓	✓	✓	✓	✓	✓
Flow- byte counting	✓	✓	✓	-	-	-	-	-	-
Ker- beros	✓	✓	✓	✓	✓	✓	✓	✓	✓
FIPS	✓	✓	✓	✓	✓	✓	✓	✓	-
FQDN Policies	✓	✓	✓	-	✓	✓	-	-	✓
FQDN Traffic report- ing	✓	✓	✓	✓	✓	✓	-	-	-
IPSec (Secure- Con- nect)	✓	√	✓	✓	✓	✓	-	-	-

Fea- ture	Win- dows	Win- dows Edge	Li- nux	RHEL 5	C- VEN	Cen- tOS8	AIX	So- la- ris	Ma- cOS (End- point)
Installer	MSI; EXE (from 21.2.1)	MSI; EXE (from 21.2.1)	pkg	pkg	apk; rpm (from 19.3.2)	pkg	bff	pkg	dmg
Pairing script (oneliner from PCE UI)	✓	✓	✓	✓	✓	✓	-	-	✓
Process- based policies	✓	✓	o e- bpf	o e-bpf	-	-	-	-	o (P1) networ- kexten- sion



## NOTE

On RHEL 5, machine authentication is not supported.

## illumio-ven-ctl General Syntax

The illumio-ven-ctl is a primary tool for managing VENs on individual workloads. The script varies slightly by platform.

#### **Set PATH Environment Variable**

For easier invocation of illumio-ven-ctl and other control scripts, set your PATH environment variable to the directories where they are located:

- Linux: default location is /opt/illumio\_ven
- Windows: default location is C:\Program Files\Illumio

## **Command Line Syntax by Platform**

Platform	Command	Notes
Linux/AIX/ Solaris	illumio-ven- ctl	Parameters for the subcommands are preceded by two hyphens: option1 varoption2 var

Platform	Command	Notes
Windows	illumio-ven- ctl.ps1	In Windows PowerShell, the .ps1 extension is optional.
		Parameters for the script are preceded by a single hyphen:  -option1 var -option2 var

# Linux/AIX/Solaris Command Line Help

\$ illumio-ven-ctl --help
Usage: {activate|backup|check-env|conncheck|connectivitytest|deactivate|gen-supportreport|prepare|restart|restore|start|status|stop|
suspend|unpair|unsuspend|version|workloads}

# **Windows Command Line Help**

illumio-ven-ctl.ps1 <action> <options>

### **Useful VEN and OS Commands**

This topic provides is a short description of the VEN command-line tools that you commonly use for various operations, and some useful native OS commands. Syntax for the VEN-provided commands is detailed throughout this guide, and in the help of the commands themselves.

Additionally, this topic lists the availability of the VEN commands across operating systems.

### **Verify VEN Version Number**

You can verify the version of the VEN software in several different ways:

- View the VEN version in the PCE web console.
- Run the following command on the workload:

# /opt/illumio\_ven/illumio-ven-ctlversion 21.5.0-xxxx

• Run the following command on a Windows workload:

PS C:\Users\Administrator> & 'C:\Program Files\Illumio\illumio-ven-ctl.ps1' version21.5.0-xxxx

- Examine the columns in **Add or remove programs** or Task Manager.
- Examine the **Properties** > **Details** tab of venAgentMgr.exe or venPlatformHandler.exe.
- Use the Illumio Core REST API. With the REST API, the agent-version key and value are returned in the payload of every response.

# **Commonly Used VEN Commands**

Platform	Command	Description
Linux & macOS	/opt/illumio_ven/illu- mio-ven-ctl	VEN Linux shell control script to control VEN control VEN settings and functions
	<pre>/opt/illumio_ven/bin/ agent_status.sh</pre>	Alternative to illumio-ven-ctl status
	ps	Native OS command to list all system processes
	chkconfig	Native OS command to update and query runlevel information for system services
Windows	<pre>C:\Program Files\Illu- mio\illumio-ven-ctl.ps1</pre>	VEN PowerShell script to control VEN settings and functions
	Get-Service	Native OS PowerShell command to display system services
	tasklist /svc	Native OS command to display system services
	wf.msc	Native OS command to manage the Windows firewall
AIX/Solaris	/opt/illumio_ven/illumio-ven-ctl	VEN AIX/Solaris shell control script to control VEN control VEN settings and functions
	<pre>/opt/illumio_ven/bin/ agent_status.sh</pre>	Alternative to illumio-ven-ctl status
	<pre>/opt/illumio_ven/bin/ agent_status.sh</pre>	Alternative to illumio-ven-ctl status
	ps	Native OS command to list all system processes
AIX	lssrc	Native OS command to list OS subsystem status
Solaris	svcs	Native OS command to list OS service status

# illumio-ven-ctl Command Options by OS



#### NOTE

Options and subcommands are not yet provided for every command listed below. However, this table may be updated periodically.

The following tables detail the **Illumio-ven-cti** usage constraints and command support by operating system.

# Table 3. Usage

/opt/lilumio\_ven/lilumio-ven-cti <command> [command-options] <command-args>

#### /opt/illumlo\_ven/illumlo-ven-cti <command> [command-options] <subcommand> [subcommand-options]



#### **WARNING**

**Illumio-ven-cti** is the only supported way to manage the VEN.

Do not attempt to use any of the following directly:

- Linux **systemd systemeti** commands
- Solaris SMF svcs and svcadm commands
- Legacy **Init.d** start/stop scripts
- Windows Service Control Manager

While the above usage will not break the VEN, it is only designed to work when invoked automatically by the OS at boot or shutdown time.

# **Table 4. Commands by Operating System**

Command	Descrip- tion	Win- dows	AIX	Cen- tOS	De- bian	RHEL & ma- cOS	So- la- ris	SUSE	Ubun- tu
activate	Activate VEN	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
check-env	Check VEN run- time_env.yml settings	Υ	Υ	Υ	Υ	Y	Υ	Υ	Υ
conncheck	Query VEN policy	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
connectivity-test [-v] [-j] [—test-all-ips]	Test connectivity with PCE	Y	Υ	Υ	Υ	Υ	Υ	Y	Υ
deactivate [main- tenance-token <to- ken&gt;] [notify-pce <true faise=""  ="">]</true></to- 	Deactivate VEN without uninstalling	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
gen-supportreport [- y] [-f <file>] [-b]</file>									
Note: This command does not upload VEN Support Reports to the PCE. Be sure to move VEN Support Reports off the workload as needed.	Generate VEN support reports	Υ	Y	Y	Y	Υ	Y	Υ	Υ
prepare	Prepare VEN image	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
restart [mainte- nance-token <to- ken&gt;]</to- 	Restart VEN services	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ

Command	Descrip- tion	Win- dows	AIX	Cen- tOS	De- bian	RHEL & ma- cOS	So- la- ris	SUSE	Ubun- tu
set-proxy <serv- er:port&gt;</serv- 									
reset-proxy									
show-proxy									
Note: For the set- proxy command, serverport must be specified using one of the following:  • IP address of the proxy (for example, 10.10.10.10:8080)  • FQDN of the proxy (for exam- ple, proxy.exam- ple.com:8080)  • HTTP or HTTPS schema (for ex- ample, https:// proxy.exam- ple.com:8080	Manage VEN proxy set- tings	Y	Y	Y	Y	Y for RHEL No for macoS	Y	Y	Y
start	Start VEN services	Υ	Υ	Υ	Υ	Y	Υ	Υ	Y
status [-v] [-x   stdexit]									
status connectivity	Report VEN status	Υ	Υ	Y	Υ	Υ	Υ	Υ	Υ
status health									
status policy									
stop [maintenance- token <token>]</token>	Stop VEN services	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
suspend [main- tenance-token <to- ken&gt;] [-y]</to- 									
Important: The suspend command stops the VEN and removes all Illumio rules from the OS firewall, thereby exposing the workload. This is a step further than merely marking the VEN as suspended on the PCE console.	Suspend VEN (enter emer- gency state)	Y	Y	Y	Y	Y	Y	Y	Y

Command	Descrip- tion	Win- dows	AIX	Cen- tOS	De- bian	RHEL & ma- cOS	So- la- ris	SUSE	Ubun- tu
unpair [—mainte- nance-token <to- ken&gt;] <saved open<br=""  ="">  recommended&gt; [noreport]</saved></to- 									
Subcommands:					Y		Y	Y	
<saved open="" rec-<br=""  ="">ommended&gt;</saved>	Unpair VEN	Υ	Υ	Υ	Y	Υ	Y	Y	Υ
Subcommand arguments:									
[noreport]									
unsuspend [main- tenance-token <to- ken&gt;] [-y]</to- 	Unsuspend VEN (exit emergency state)	Υ	Υ	Υ	Υ	Υ	Υ	Υ	Υ
version	Display VEN version	Υ	Υ	Υ	Y	Υ	Υ	Υ	Υ

#### Notes:

Notes:	
maintenance-token <to- ken&gt;</to- 	Specify the maintenance <b><token></token></b> that will authorize the sub-command. This option is not needed if a maintenance token was not generated by the PCE.
notify-pce	Specify whether (true) or not (false) to notify the PCE that the VEN has been deactivated. By default the PCE is always notified.
-b	Block and do not exit until this command completes. By default this command exits after work is queued in background.
-f <file></file>	The original support report is always saved as <b>/opt/II-lumio_ven_data/reports/Illumio-agent-report.tgz</b> . Save another copy as the specified <b><file></file></b> (can include an absolute path).
-J	Enable JSON output.
stdexit	Use the following exit codes: 0 = all VEN process running; 1 = error or partialy running; 3 = no VEN process running.
test-all-lps	Instead of using default OS name resolution to test a single PCE IP address, explicitly resolve and test all IP addresses returned for the PCE FQDN.
- <b>v</b>	Enable verbose output.
- <b>x</b>	Synonym for <b>stdexit</b>
<b>-y</b>	Assume <b>yes</b> for all yes/no prompts, don't prompt for confirmation. By default, this command prompts for confirmation.
saved	Subcommand used with <b>unpair</b> . Corresponds to PCE UI "Remove Illumio policy." Restore firewall as it was when VEN was installed. Dangerous if the VEN was installed long ago since

old firewall is probably stale and incorrect.

open	Subcommand used with <b>unpair</b> . Corresponds to PCE UI "Open all ports." Do not block any traffic after uninstalling. User is expected to create a new firewall (current firewall won't survive reboot).
recommended	Subcommand used with <b>unpair</b> . Corresponds to PCE UI "Close all ports except remote management." User is expected to create a new firewall (current firewall won't survive reboot). Remote management includes SSH, RDP, and WinRM.
noreport	Subcommand argument used with <b>unpair</b> . Do not generate a support report before uninstalling.

# **VEN State**

This section describes all the VEN's states and how you can manage them. VEN state refers to the active state of the VEN on a workload; basically, is it running, stopped, enabled, disabled, or suspended.

# **VEN Startup and Shutdown**

This topic provides information on starting and stopping VENs.

# **VEN Startup and Shutdown (illumio.com)**

- AIX and Solaris: Start up the VEN.
- AIX and Solaris: Shut down the VEN and send a Goodbye message.

# **Start Up VENs**

The VEN starts when the workload is booted from the system boot files. The VEN can also be started manually.

### **Automatic Startup**

The VEN starts when the workload is booted from system boot files:

Plat- form	Command	Notes
Linux/AI X/Solaris	<pre>/etc/rc.d/init.d/illumio-ven Or</pre>	Installs firewall kernel modules if necessary, sets firewall to the desired state.
	/etc/init.d/illumio-ven	

Plat- form	Command	Notes
	CentOS/RHEL 7+, starting from 19.3.2	Initializes and starts the daemon processes needed for VEN operation.
	/usr/lib/systemd/system/	
	illumioven.service	IMPORTANT  This command is only supported in Illumio Core 19.3.2-VEN and later.
Windows	None needed.	The Service Control Manager (SCM) starts all VEN services at boot.

# **Manual Startup**

The VEN can also be started manually with illumio-ven-ctl start.

Platform	Command
Linux/AIX/Solaris/RHEL/CentOS	/opt/illumio_ven/illumio-ven-ctl start
Windows	C:\Program Files\Illumio\illumio-ven-ctl.ps1 start

### **Shut Down VENs**

At shutdown, the VEN sends a "goodbye" message to the PCE. The PCE marks the workload as offline and initiates a policy recomputation. After the new policy is distributed throughout the network, the workload without the VEN is effectively isolated from the network.

### Linux/AIX/Solaris Workload Shutdown

Platform	Command	Notes
Linux/AIX/Solaris/RHEL/ CentOS	illumio-ven-ctl stop	<ul><li>Stops all VEN processes.</li><li>The VEN sends a "goodbye" message to the PCE.</li></ul>
Windows	None needed.	<ul> <li>Service Control Manager (SCM) stops all VEN services.</li> <li>The VEN sends a "goodbye" message to the PCE.</li> </ul>

# Disable and Enable VENs (Windows only)

If you want to install the VEN but activate it later, you can disable the VEN after you first install it. This is only available on the Windows platform.

For example, you can load the VEN on machine image and disable the VEN. See considerations regarding preparing a "Golden Master" in the VEN Installation and Upgrade Guide.

Windows  • Enable  • Disable:  ena	C:\Program Files\Illumio> .\illumio-ven-ctl.psl ble
	C:\Program Files\Illumio> .\illumio-ven-ctl.ps1 able

# **VEN Suspension**

If users are not able to reach an app on a workload, you can suspend the VEN to see if the VEN was causing the issue. The VEN suspension feature allows you to isolate a VEN on a workload to troubleshoot any communication issues with that workload, and to determine if the VEN is the cause of the anomalous behavior.



### **IMPORTANT**

**Security Implications:** When the VEN is suspended, the workload firewall rules are removed. This means that the VEN is open and all traffic is allowed.

# **About VEN Suspension**

When a VEN is suspended, the following is true:

- Any rules programmed into the workload's iptables (including Custom iptables rules), Windows Filtering Platform (WFP), or ipfilter, or pf firewalls are removed completely, and all VEN software processes are shut down.
- The VEN connectivity and policy sync status are changed to **Suspended**.
- The VEN informs the PCE that it is in the suspended state. If the PCE does not receive this notification, you must mark the workload as **Suspended** in the PCE web console.
- If the PCE does not receive the VEN suspension notification and you do not mark the VEN as suspended in the PCE, after one hour, the PCE assumes the workload is offline and removes it from the policy, which effectively isolates the workload from the network. For example, users will not be able to reach apps on the workload.
- Workloads communicating with the suspended VEN continue to have their rules programmed into iptables or WFP.
- The SecureConnect policy continues to be in effect while the VEN is suspended.
- An organization event (server\_suspended) is logged. This event is exportable to CEF/ LEEF and has a severity of WARNING.

Properties of a suspended VEN:

- The workload continues to appear in the PCE in the workloads list page and Illumination map.
- You can unpair a workload while its VEN is suspended.
- You can change the policy state of the workload in the PCE Web Console while the VEN is suspended.
- When the VEN is unsuspended, the new policy state is applied.
- Heartbeats or other communication is not expected, but if one is received, any communication is logged by the PCE.

• If the PCE is rebooted, the VEN remains suspended.

When a VEN is unsuspended:

- The PCE is informed that the VEN is no longer suspended and can now receive policy from the PCE.
- If existing Rules affect the unsuspended workload, the PCE will reprogram those Rules.
- An organization event (server\_unsuspended) is logged. This event is exportable to CEF/ LEEF and has a severity of WARNING.
- The workload will revert to its policy state prior to Suspended.
- Custom iptables Rules are configured back into the iptables.

You can manage VEN suspension by using these features of the Illumio Core:

- The REST API
   For more information on this method, see "VEN Operations" in the REST API Developer Guide.
- · The command line
- The PCE web console

For more information, see Mark VEN as Suspended Using the PCE Web Console [226] in this topic.

# Linux VEN: Back Up Custom iptables/NAT Rules



#### NOTE

Before suspending a Linux VEN, back up the workload PCE custom iptables filter or NAT rules.

After a workload is suspended, restore the rules on the workload because all custom iptables filter or NAT rules will have been removed from the workload.

### **Suspend and Unsuspend Commands**

Plat- form	Action	Command	Notes
Unix • Uns	<ul><li>Suspend</li><li>Unsuspend</li></ul>	<pre>\$ illumio-ven-ctl suspend Suspending the VEN The VEN has been suspended. PCE was notified.</pre>	On Linux, be sure to backup your custom con- figuration.
		<pre>\$ illumio-ven-ctl unsuspend Unsuspending the VEN The VEN has been unsuspended. PCE was notified.</pre>	See Linux VEN: Back Up iptables/NAT Rules [225].

Plat- form	Action	Command	Notes
Win- dows	<ul><li>Suspend</li><li>Unsuspend</li></ul>	PS C:\Program Files\Illumio> .\illumio-ven-ctl.psl suspend Suspending the VEN The VEN has been suspended. PCE was notified.	
		PS C:\Program Files\Illumio> .\illumio-ven-ctl.psl unsuspend Unsuspending the VEN The VEN has been unsuspended. PCE was notified.	

### Mark VEN as Suspended Using the PCE Web Console

In addition to using the command explained in the previous section, you can mark a workload as **Suspended** using the PCE web console.



#### NOTE

Marking a workload as **Suspended** in the PCE web console does **not** actually suspend the VEN. It should only be used if the VEN went offline before it could be suspended. Marking the workload as **Suspended** is a way to keep the PCE from removing the VEN from the policy and isolating it from the rest of the network.

To mark a VEN Suspended:

- 1. Go to Serverss & Endpoints > Workloads.
- 2. Click the VENs tab.
- 3. Click the name of the VEN you want to mark as suspended.
- 4. On the VEN's detail page, click Mark as Suspended.
- 5. Click **Suspend** to confirm the VEN suspension.

The number of suspended workloads is displayed at the top of the page and the suspended workload is displayed on the Workloads page with a red "Suspended" icon.

To clear a VEN's Suspension status:

- 1. Go to Servers & Endpoints > Workloads.
- 2. Click the VENs tab.
- 3. Click the name of a VEN marked as suspended that you want to mark as unsuspended.
- 4. On the VEN's detail page, click Clear Suspension.
- 5. Click Clear to confirm.

# **Disable VEN Suspension on Workloads**

You can disable the ability to suspend a VEN on a workload. To disable the VEN suspension feature, define the following environment variable for the VEN. How you set the variable varies by VEN platform. See the procedures to set the environment variable for each platform.

Environment Variable	Values
VEN_NO_SUSPEND	1 - Disable VEN suspension
	0 - VEN suspension is enabled



### NOTE

Disabling VEN suspension is not supported for Illumio Secure Cloud customers

#### **Linux VENs**

Before installing or upgrading the Linux VEN, enter the following command line syntax to set the environment variable:

# VEN\_NO\_SUSPEND=1 <ven\_install\_or\_upgrade\_command>

Examples:

- # VEN\_NO\_SUSPEND=1 rpm -i <illumio-ven-pkg>.rpm
- # VEN\_NO\_SUSPEND=1 dpkg -i <illumio-ven-pkg>.deb
- # VEN\_NO\_SUSPEND=1 rpm -U <illumio-ven-pkg>.rpm

### **Windows VENs**

You can include the suspend parameter when installing or upgrading the VEN:

PS C:\><ven\_installation\_filename>.exe <options> VEN\_NO\_SUSPEND=1

Available options include:

- /install
- /log logfile.log
- /quiet

Example:

PS C:\> ven\_install\_filename.exe /install EN\_NO\_SUSPEND=1

### **AIX VENs**

Before installing or upgrading the AIX VEN, enter the following command line syntax to set the environment variable:

# VEN\_NO\_SUSPEND=1 <ven\_install\_or\_upgrade\_command>

Example:

# VEN\_NO\_SUSPEND=1 installp -acXgd <path\_to\_bff\_package> illumio-ven

#### **Solaris VENs**

When you install the Solaris VEN by interactively responding to installer prompts, enter  ${\tt n}$  at the following prompt:

```
"Do you want to disable VEN suspend? [y,n] ", enter as required : y - disable, n - default/no-action
```

When you use the template file in the VEN package to pre-load responses to installer prompts, copy the following file:

illumio-ven/root/opt/illumio\_ven/etc/templates/response

Change the copied file in the following way:

```
/usr/xpg4/bin/sed 's/^VEN_NO_SUSPEND=0/VEN_NO_SUSPEND=1/g' \
< illumio-ven/root/opt/illumio_ven/etc/templates/response \
> illumio-ven/root/opt/illumio_ven/etc/templates/response.custom
```

### **Deactivate VENs**

# **VEN Deactivation and Unpairing**

This section describes all the ways that you can change the VEN software running on a workload, from reverting it to an earlier release, deactivating the software, to uninstalling it completely.

This section describes how to deactivate and unpair the VEN software.

### **Deactivate and Unpair VENs**

This topic discusses how to deactivate and unpair VENs by operating system. Additionally, it explains the security implications for performing these tasks and makes recommendations on how to properly deactivate and unpair VENs.

See also VEN Unpairing Details [231] for further information.

### **Deactivate Using VEN Command Line**

To deactivate the VEN, you must use the illumio-ven-ctl command.

deactivate breaks the PCE-to-workload connection but doesn't uninstall the VEN software (as unpair would).

After deactivation, the workload reverts to its pre-Illumio native firewall settings.

### Linux/AIX/Solaris

# /opt/illumio\_ven/illumio-ven-ctl deactivate

#### Windows

PS C:\Program Files\Illumio> .\illumio-ven-ctl.ps1 deactivate

# **Unpair Using VEN Command Line**

The unpair command breaks the PCE-to-workload connection, and uninstalls the VEN software. The unpair command gives you control over the post-unpair state, as described below.

# Linux/AIX/Solaris

With illumio-ven-ctl unpair, specify the post-unpair state for the VEN:

# /opt/illumio\_ven/illumio-ven-ctl unpair [recommended | saved | open]



### NOTE

On Linux, the unmanaged option is not available.

Unpair Options on Linux/AIX/Solaris

• recommended: Uninstalls the VEN and temporarily allows only SSH/22 until reboot.



### **IMPORTANT**

**Security Implications**: When the workload is running a production application, it could break because this workload will no longer allow any connections to it other than SSH on port 22.

• saved: Uninstalls the VEN and reverts to pre-Illumio policy to the state before the VEN was first installed. Revert the state of the workload's iptables to the state before the VEN was installed. The dialog displays the amount of time that has passed since the VEN was installed.



### **IMPORTANT**

**Security Implications**: Depending on how old the iptables configuration is on the workload, VEN removal could impact the application.

• open: Uninstalls the VEN and leaves all ports on the workload open.



### **IMPORTANT**

**Security Implications**: When iptables or Illumio are the only security being used for the workload, the workload is open to anyone and becomes vulnerable to attack.

#### **Windows**

With illumio-ven-ctl.ps1 unpair, specify the post-deactivation state for the VEN:

PS C:\Program Files\Illumio> .\illumio-ven-ctl.ps1 unpair [recommended | saved | open | unmanaged]

Unpair Options on Windows

• recommended: Temporarily allow only RDP/3389 and WinRM/5985,5986 until reboot.



### **IMPORTANT**

**Security implications**: If the workload is running a production application, the application could break because the workload no longer allows any connections to it.

• saved: Restores firewall rules and configuration to the state it was in at the time the workload was paired. Reverts the state of the firewall to before Illumio was installed.



### **IMPORTANT**

**Security Implications**: Depending on how old the WFP configuration was on the workload, VEN removal could impact the application.

• open: Uninstalls the VEN and leaves all ports on the workload open.



### **IMPORTANT**

**Security Implications**: When WFP or the PCE are the only security being used for the workload, the workload is open to anyone and becomes vulnerable to attack.

• unmanaged: Uninstalls the VEN and reverts to the workload's currently configured Windows Firewall policy.

# **Unpair Using System Commands**

You can use the illumio-ven-ctl (Linux/AIX/Solaris) or illumio-ven-ctl.ps1 (Windows) to unpair the VEN.



### **IMPORTANT**

As an alternative, you can use the system uninstall command to unpair the VEN, however it is not recommended. This command should only used as a fallback if there are issues with unpairing with illumio-ven-ctl or illumio-ven-ctl.ps1.

#### Linux

- RPM: rpm -e illumio-ven
- DPKG: dpkg -P illumio-ven

#### Windows

• Use the Control Panel to uninstall the VEN.

#### AIX

• installp -u illumio-ven

#### **Solaris**

• pkgrm illumio-ven

# **VEN Unpairing Details**

During unpairing, the VEN performs the following actions. These actions are specific to the workload operating system.

# Linux/AIX/Solaris

- Unpairs the VEN from the PCE.
  - Sends a "deactivate" message to the PCE.
- Restores the host firewall state to the requested or open state if no state is specified. Possible values of the state are:
  - Open: All ports are open after VEN uninstalls.
  - Saved: The firewall is restored to its state just before the VEN was installed.
- Uninstalls the illumio-ven package.
  - · Removes program and data files.
  - Removes repo and GPG files and package.

#### **Windows**

- Unpairs the VEN from the PCE.
  - Sends a "deactivate" message to PCE.
- Stops all VEN services.
- Unregisters services from Service Control Manager.
- Restores Windows Firewall to requested state.

- Open: All ports are open after VEN uninstalls.
- Saved: Restore the firewall to its state just before the VEN was installed.
- Removes Program Files and ProgramData directories.
- Removes VEN registry keys.
- · Removes Certificate.
- Unregisters VEN Event provider.

# **Support Report During Unpairing**

When you unpair a workload, the VEN creates a local Support Report for diagnostic purposes in case you need a record of the VEN after it is uninstalled.

On Linux/Unix, the generated Support Report is saved to the /tmp directory. On Windows, the generated Support Report is saved to the C:\Windows\Temp directory. If a there is an existing Support Report in this directory, it will be overwritten with the new one.

# **Monitor and Diagnose VEN Status**

This section provides you with the necessary information to monitor VEN status on your workloads and to troubleshoot any problems that might occur.

### **VEN-to-PCE Communication**

This topic discusses how the VEN communicates with the PCE for both Illumio Core Cloud customers and Illumio Core On-Premises customers.

# **Details about VEN-to-PCE Communication**

#### On Prem

The VEN, by default, communicates with the PCE when installed in customers data centers (On-Premises) over the following ports:

- Port 8443 HTTPS requests
- Port 8444 long-lived TLS-over-TCP connection

### SaaS

The VEN communicates with the Illumio Core Cloud PCE over Port 443 for both HTTPS requests and the long-lived TLS-over-TCP connection.

The VEN uses Transport Level Security (TLS) to connect to the PCE. The PCE certificate must be trusted by the VEN before communication can occur.

The VEN sends the following details to the PCE:

- · Regular heartbeat with the latest hostname and other properties of the workload
- Traffic log

- Network interfaces
- Processes
- Open ports
- Interactive users (Windows only)
- Container workload information (C-VEN only)

The VEN receives the following details from the PCE:

- Firewall policy
- Lightning bolts/heartbeat responses with action to perform, such as sending a support report

# **PCE Certificate Verification**

Keep in mind the following:

- The VEN requires that the full certificate chain, up to but not including a self-signed root certificate trusted by the OS, be sent as part of the TLS handshake with the PCE.
- The PCE will always send the full certificate chain, minus the root certificate.
- If a "Man In The Middle" (MITM) device with TLS inspection capability is deployed on a path between the VEN and the PCE, Illumio recommends bypassing such capabilities for VEN-to-PCE communication:
  - Some MITM devices that forge the PCE certificate will not send the full certificate chain, resulting in a TLS failure with some VEN and OS combinations.
  - Illumio does not test coexistence with any MITM devices. With respect to compatibility with partial certificate chains in the TLS handshake, the behavior of the VEN and the behavior of the MITM device may change at any time without notice on either side.

### **Configurable Time for Heartbeat Warning**

You can change the threshold for the time the VEN goes without a heartbeat and goes into the Warning state. To change the 15-minute threshold in the PCE interface:

- 1. Go to Settings > Offline Timers.
- 2. Click Edit.
- 3. In the Disconnect and Quarantine section, select Custom Timeout.
- **4.** Specify a wait time.
- 5. Click Save.

### **VEN Connectivity**

- Online: The workload is connected to the network and can communicate with the PCE.
- Offline: The workload is *not* connected to the network and cannot communicate with the PCF
- **Suspended:** The VEN is in the suspended state and any rules programmed into the workload's IP tables (including custom iptables rules) or Windows filtering platform firewalls are removed completely. No Illumio-related processes are running on the workload.

### **VEN Support for IPv6 Traffic**

You can configure how VENs support IPv6 traffic. Go to **Settings > Security** and click the General tab:

For VEN releases 20.2.0 and later, choose one of these options:

- Allow IPv6 traffic according to your policy
- Block IPv6 traffic only when in Full Enforcement. (Traffic will always be allowed on AIX and Solaris workstations.)

For VEN releases pre-20.2.0, choose one of these options:

- Allow all IPv6 traffic
- Block IPv6 traffic only when in Full Enforcement. (Traffic will always be allowed on AIX and Solaris workstations.)

### **Communication Frequency**

The following table shows the frequency of communications to the PCE for common VEN operations. See PCE Administration Guide for more details about these intervals and their effects.

Function	Frequency	Notes
Firewall policy updates	Real-time if light- ning bolts are en- abled.	If lightning bolts are displayed or the channel is not functional, policy updates are communicated to the VEN by a heartbeat action.
Active service reporting	See note.	<ul> <li>AgentManager performs all active service reporting tasks.</li> <li>At start-up, a snapshot of processes and ports is sent to the PCE.</li> <li>Every 24 hours, a snapshot of <i>all</i> listening processes is taken and sent to the PCE.</li> </ul>
Interface reports and changes	Event driven.	Only if there are changes to the interfaces; otherwise, no data are sent.
Traffic flow log	Every 10 minutes.	<ul> <li>The VEN checks if there are logs, and if so, sends them to the PCE.</li> <li>If the PCE is inaccessible, the VEN retains flow summaries for the previous 24 hours but purges logs that are older than 24 hours, with the oldest log at every 24-hour mark.</li> <li>When logs are purged, the VEN locally logs an alert, which is posted to the PCE as an event when connectivity is restored.</li> </ul>
Heartbeat	Every 5 minutes.	If the PCE does not receive three consecutive heartbeats, an event is written to the PCE's event log. See also VEN Heartbeats and Lost Agents [234].
Dead-peer inter- val	Configurable	Default is 60 minutes (or 12 heartbeats). See also VEN Offline Timers and Isolation [235].
VEN tampering detection	Within a few seconds on Windows and Linux.	For more information, see Host Firewall Tampering Protection [246].

# **VEN Heartbeats and Lost Agents**

The VEN sends a heartbeat message every five minutes to the PCE to inform the PCE that it is up and running. If the VEN fails to send a heartbeat, check the workload where the VEN is installed and investigate any connectivity issues. If the VEN continues to fail to send a heartbeat, it eventually is marked Offline, which means it can no longer communicate with the PCE or other managed workloads.

### PCE down or network issue and the VEN degraded state

- If the VEN cannot connect to the PCE either because the PCE is down or because of a network issue, the VEN continues to enforce the last-known-good policy while it tries to reconnect with the PCE.
- After missing three heartbeats, the VEN enters the *degraded state*. In the degraded state, the VEN ignores all the asynchronous commands received as lightning bolts from the PCE, except the commands for software upgrades and support reports.
- After connectivity to the PCE is restored, the VEN comes out of the degraded state after three successful heartbeats.

#### Failed authentication and the VEN minimal state

- If the VEN enters the degraded state because of failed authentications, the VEN enters a state called *minimal*. In the minimal state, the VEN only attempts to connect with the PCE every four hours through a heartbeat.
- If the authentication failure was temporary, the VEN exits the minimal state after its first successful connection to the PCE. Whenever the VEN enters the minimal state, it stops the VTAP service. VTAP is then restarted when the VEN exits the minimal state.
- If Kerberos authentication is used, the VEN attempts to refresh the agent token with a new Kerberos ticket before sending a heartbeat. If the authentication error is not recovered after four hours, the VEN sends a lost-agent message to the PCE which then logs a message in the Organization Events. The message informs the user that the VEN needs to be uninstalled or reinstalled manually on this workload.

#### **VEN Offline Timers and Isolation**

When the VEN on a workload is stopped, the VEN makes a "best effort" REST API goodbye call to the PCE. After a delay specified by the "workload goodbye timer" (a default of 15 minutes), the PCE marks the workload offline and removes it from the policy.

If the REST API call (goodbye) fails, or if the workload goes offline abruptly (for example, due to a power outage), the PCE stops receiving heartbeats from the workload. After the period of time configured in the PCE web console **Settings > Offline Timers** elapses, the PCE marks the workload offline and recomputes policies for the peer workloads to isolate the offline workload. If no time period has been configured, the default is 60 minutes, or 12 heartbeats.

The system\_task.agent\_missed\_heartbeats\_check alert triggers an alert to be sent at 25% of the time configured in the offline timer. For example, if the offline timer is configured to 1 hour, an alert is sent after the VEN has not sent a heartbeat for 15 minutes; if the offline timer is configured to 4 hours, an alert is sent after the VEN hasn't sent a heartbeat for 1 hour. If a user has customized the timer, the event will show up when 25% of the timer has elapsed.

### Sampling Mode for VENs

If the VEN receives a sustained amount of high traffic per second from many individual connections, the VEN enters Sampling Mode to reduce the load. Sampling Mode is a protection mechanism to ensure that the VEN does not contribute to the consumption of CPU. In Sampling Mode, not every flow is reported. Instead, flows are periodically sampled and logged.

After CPU usage on the VEN decreases, Sampling Mode is disabled and each connection is reported to the VEN. The entry and exit from sampling-mode is automatically performed by the VEN depending on the load on the VEN.

Details about entering and exiting Sampling Mode are captured in /opt/illumio\_ven\_da-ta/log/vtap.log. Look for Entering and Exiting throttle state.

### **Linux TCP Timeout Variable**

For VENs installed on Linux workloads, the VEN relies on conntrack to manage the nf\_conntrack\_tcp\_timeout\_established variable.

By default, as soon as the VEN is installed, it sets the nf\_conntrack\_tcp\_timeout\_estab-lished frequency to eight hours (28,800 seconds). Setting this frequency manages work-load memory by removing unused connections from the table and thereby increasing performance.

If you change the frequency via sysctl, it is reverted the next time the workload is rebooted or the next time the VEN's configuration file is read.

### **Wireless Connections and VPNs**

The Illumio Core VEN supports wireless connections for VENs installed on endpoints in the Illumio Core.

For more information about installing the VEN on an endpoint, and supporting a wireless network connection, see the *Endpoint Installation and Usage Guide*.



# NOTE

Wireless network support is only available for endpoints in Illumio Core. It is not available for other support server types, such as bare-metal servers, virtual machines (VMs), or container hosts.

#### **Show Amount of Data Transfer**

The operation of 'show amount of data transfer' capability on the PCE is a preview feature available with the 20.2.0 release. The PCE now reports amount of data transferred in to and out of workloads and applications in a datacenter. The number of bytes sent by and received by the provider of an application are provided separately. These values can be seen in traffic flow summaries streamed out of the PCE. This capability can be enabled on a per-workload basis in the Workload page. It can also be enabled in the pairing profile so that workloads are directly paired into this mode.

After the feature is enabled, the VEN starts reporting the number of bytes transferred over the connections. The PCE collects this data, adds relevant information, such as, labels and sends the traffic flow summaries out of the PCE.

The direction reported in flow summary is from the viewpoint of the provider of the flow.

• Destination Total Bytes Out (dst\_tbo): Number of bytes transferred out of provider (Connection Responder)

• Destination Total Bytes In (dst\_tbi): Number of bytes transferred in to provider (Connection Responder)

The number of bytes includes:

- 1. L3 and L4 header sizes of each packet (IP Header and TCP Header)
- 2. Sizes of multiple headers that may be included in communication (when SecureConnect is enabled)
- 3. Retransmitted packets.

The bytes transferred in the packets of a connection are included in measurement. This is similar to various networking products such as firewalls, span-port measurement tools, and other network traffic measurement tools that measure network traffic.

Term	Description
dst_tbi	Destination Total Bytes
	In Total bytes received till now by the destination over the flows included in this flow-summary in the latest sampled interval. This is the same as bytes sent by the source. Present in 'A', 'C', and 'T' flow-summaries. source = client = connection initiator, destination = server = connection responder.
dst_tbo	Destination Total Bytes
	Out Total bytes sent till now by the destination over the flows included in this flow-summary in the latest sampled interval. This is the same as bytes received by the source. Present in 'A', 'C', and 'T' flow-summaries. source = client = connection initiator, destination = server = connection responder.
dst_tbi	Destination Delta Bytes
	In Number of bytes received by the destination in the latest sampled interval, over the flows included in this flow-summary. This is the same as bytes sent by the source. Present in 'A', 'C', and 'T' flow-summaries. source = client = connection initiator, destination = server = connection responder.
dst_dbo	Destination Delta Bytes
	Out Number of bytes sent by the destination in the latest sampled interval, over the flows included in this flow-summary. This is the same as bytes received by the source. Present in 'A', 'C', and 'T' flow-summaries. source = client = connection initiator, destination = server = connection responder.
inter- val_sec T	Time Interval in Seconds
341_344	Duration of latest sampled interval over which the above metrics are valid.

Connection State	Description
А	<b>Active:</b> The connection is still active at the time the record was posted. Typically observed with long-lived flows on source and destination side of communication.
Т	<b>Timed Out:</b> Flow does not exist any more. It has timed out. Typically observed on destination side of communication.
С	<b>Closed:</b> Flow does not exist any more. It has been closed. Typically observed on source side of communication.
S	<b>Snapshot:</b> Connection was active at the time VEN sampled the flow. Typically observed when the VEN is in Idle state.

# **VEN Status Command and Options**

This topic describes various commands for determining the status of a VEN. Log in as root to run these commands.

#### **Command**

The status command returns the status of the VEN on the workload.

illumio-ven-ctl status

### Linux/AIX/Solaris VENs

# /opt/illumio\_ven/illumio-ven-ctl status

#### **Windows VENs**

C:\Program Files\Illumio\illumio-ven-ctl status

#### **Return parameters**

#### Linux

```
Status for illumio-control:

- Environment Illumio VEN Environment is setup

- venAgentMgr venAgentMgr (pid 23598) is running...

- IPSec IPSec feature not enabled

- venPlatformHandler venPlatformHandler (pid 23676) is running...

- venVtapServer venVtapServer (pid 23737) is running...

- venAgentMonitor active(running)

Agent state: enforced
```

### Windows

```
Service venAgentMgrSvc: Running
Service venPlatformHandlerSvc: Running
Service venVtapServerSvc: Running
Service venAgentMonitorSvc: Running
Service venAgentMgrSvc: Enabled
Service venPlatformHandlerSvc: Enabled
Service venVtapServerSvc: Enabled
Service venAgentMonitorSvc: Enabled
```

### **Field definitions**

### Linux/AIX/Solaris

Name	Definition
Environment	Whether or not the Illumio VEN environment is setup
venAgentMgr	venAgentMgr status, and if running its pid

Name	Definition
<b>IPSec</b>	Whether or not the <b>IPSec</b> feature is enabled
venPlatformHandler	venPlatformHandler status, and if running its pld
venVtapServer	venVtapServer status, and if running its pld
venAgentMonitor	venAgentMonitor status
Agent state	For example, <b>enforced</b> QQ

# **Options**

This section describes these options:

- Policy
- Health
- Connectivity

## **Policy option**

```
illumio-ven-ctl status policy
```

Th policy option returns the timestamp, ID, and state of the current security policy the VEN received from the PCE.

### Linux/AIX/Solaris

```
# /opt/illumio_ven/illumio-ven-ctl status policy
```

### Windows

C:\Program Files\Illumio> .\illumio-ven-ctl.ps1 status policy

### **Return parameters**

### **Windows**

```
{
    "timestamp" : "2019-06-14T00:41:41Z",
    "id" : "xxxxxxxx940d0f4c2531b0d44400523dae055674-
xxxxxxxx7a6796c210fb846b0321847bc22d701e",
    "state" : "enforced"
}
```

### **Field definitions**

Linux/AIX/Solaris

Policy Field Name	Definition
timestamp	Time the policy was received from the PCE (Local time + UTC offset)

Policy Field Name	Definition
id	ID of the security policy (computed locally)
state	Policy state (for example, enforced)

# **Health option**

illumio-ven-ctl status health

The health option shows whether or not the VEN can write logs locally.



### NOTE

This is not the same as PCE health.

### Linux/AIX/Solaris VENs

# /opt/illumio\_ven/illumio-ven-ctl status health

### **Windows**

<VEN Installation Directory>\illumio\_ven\illumio-ven-ctl status health

### **Return parameters**

### **Windows**

```
{
   "results": [
      {
        "test": "VEN has write access to the log directory",
        "result": "pass"
      }
      }
      ,
      "state": "healthy"
}
```

### **Field definitions**

# Linux/AIX/Solaris

Field Name	Definition
results	Array of test results
test	VEN has write access to the log directory
result	"pass" or an error

Field Name	Definition
state	VEN health status ("healthy" or "unhealthy"); "healthy" means the VEN can write logs locally

### **Connectivity option**

The connectivity option returns the status of the VEN connectivity with the PCE.

```
illumio-ven-ctl status connectivity
```

### Linux/AIX/Solaris

```
/opt/illumio_ven/illumio-ven-ctl status connectivity
```

#### **Windows**

C:\Program Files\Illumio\illumio-ven-ctl status connectivity

### **Return parameters**

# **VEN Logging**

The VEN captures logs of its operation and traffic flow summaries locally on the workload. There are several different application log files, each with one backup. Application logs are rotated from primary to backup when their size reaches 15 MB. Application log files are preserved at reboot, because application logs are stored in files on a workload.

### **VEN Traffic Logging**

The VEN stores traffic flow summaries, rather than each individual traffic flow. For each connection, the traffic flow summary includes:

- Source IP
- Destination IP

- Destination Port
- Protocol
- Number of connections

### **Querying Flow Log Databases**

The sqlite command-line tool, which comes with the VEN, is used to query the flow log databases.

Linux/AIX/Solaris Database Query Examples

ow.db
ow.db
owsum.db
owsum.db

Window Database Query Examples

Query Type	Example
Non-aggregated accepted flows	<pre>"c:\Program Files\Illumio\bin\sqlite.exe" c: \ProgramData\Illumio\log\flow.db "select * from flow_view"</pre>
Non-aggregated dropped flows	<pre>"c:\Program Files\Illumio\bin\sqlite.exe" c: \ProgramData\Illumio\log\flow.db "select * from drop_flow_view"</pre>
Aggregated accepted flows	<pre>"c:\Program Files\Illumio\bin\sqlite.exe" c: \ProgramData\Illumio\log\flowsum.db "select * from flow_view"</pre>
Aggregated dropped flows	<pre>"c:\Program Files\Illumio\bin\sqlite.exe" c:\Program Data\Illumio\log\flowsum.db "select * from drop_flow_view"</pre>

# **List of Local Processes**

The names of local process are captured in traffic flow data and stored in the PCE.

os	Description
Windows	Indicates whether auto resize of the Conntrack table is required.
Linux, AIX, and Solaris	The VEN monitors the list of all processes with listening ports on TCP and UDP inbound connections, then matches process names to the list. Refreshes occur every 30 seconds. This process allows for a lower impact on the CPU.

The data can be exported in near-real-time to a Security Information and Event Management (SIEM) or another collector.

# **VEN Firewall Script Logging**

The Illumio firewall scripts log all errors and other key information into the platform.log file. This log file can help Illumio debug issues.

# **Traffic Flow Query Report**

You can generate, schedule, and email reports which are based off saved and recent filters from Explorer for reporting. The CSV report is downloadable and can be emailed to the user.

# **Tuning the IPFilter State Table (AIX/Solaris)**

In versions 11.3 and earlier, you can tune the IPFilter state table for AIX and Solaris workloads. Solaris versions before 11.4, you must tune the IPFilter state table. In version 11.4 and after, you must tune the packet filter.

# **About State Table Tuning**

In most environments, the state table default values are sufficient to handle the number of network connections encountered by Solaris and AIX workloads. However, if your system has a very large number of network connections, you might need to tune the state table. You can do so either before or after VEN activation. Tuning the state table values persists through rebooting, restarting, and suspending the VEN.

By default, Solaris and AIX VENs are installed with the following state table values:

fr\_statemax: 1,000,000fr\_statesize: 250,007fr\_state\_maxbucket: 256

• fr tcpclosed: 120

#### Set a Custom IPFilter State Table Size

1. Create the following file on your Solaris or AIX workload as root or the Illumio VEN user, ilo-ven.



#### NOTE

The following file that must be created by the root user or the Illumio VEN user ilo-ven: /etc/default/illumio-agent.

This file cannot be world-readable or -writeable.

2. Add the following settings and values to the file. Do not include spaces in the settings or values.

VEN File Setting	ipfilter Setting	Description
IPFIL- TER_STATE_MAX= <value></value>	fr_statemax	Maximum number of network connections stored in the state table. You must also set IPFILTER_STATE_SIZE.

VEN File Setting	ipfilter Setting	Description
IPFIL- TER_STATE_SIZE= <value></value>	fr_statesize	Size of the hash table.
		Must be a prime number. You must also set IPFILTER_STATE_MAX.
		<b>Recommended:</b> Set the hash table size to 1/4 of the number in fr_statemax. This setting allows each hash bucket to contain about 4 states.
<pre>IPFILTER_STATE_MAXBUCK- ET=<value></value></pre>	fr_state_max- bucket	Number of allowed hash collisions before the VEN starts dropping network connections
		<b>Recommended:</b> Increase this value beyond the default value to avoid dropping network connections.
IPFIL- TER_TCPCLOSED= <value></value>	fr_tcpclosed	Option introduced and supported for Illumio Core 21.2.1 VEN and later.
		To support NFS traffic so that the workload does not drop this traffic even when a rule exists in the PCE allowing the traffic. This issue occurs due to TCP port number reuse.
		<b>Recommended:</b> Illumio customers have found that setting the value for the IPFILTER_TCPCLOSED option to 2 (2 equals 1 second) resolved the issue.



### NOTE

If you set IPFILTER\_STATE\_MAX, you must also set IPFILTER\_STATE\_SIZE. If you add only one of these settings in the illumio-agent file, the VEN ignores the value and uses default values for both settings.

- 3. This step depends on whether the VEN has been activated.
  - If the VEN has not yet been activated, skip this step.
  - If the VEN has been activated, restart the VEN by entering the following command:

/opt/illumio\_ven/illumio-ven-ctl restart

**4.** Enter the following command to confirm the new values are configured for the state table:

/usr/sbin/ipf -T fr\_statemax,fr\_statesize,fr\_state\_maxbucket

The command output displays the values from the state table. In this example, the settings are still at the default values:

fr\_statemax min 0x1 max 0x7fffffff current 1000000 fr\_statesize min 0x1 max 0x7fffffff current 250007 fr\_state\_maxbucket min 0x1 max 0x7fffffff current 256

# **Manage Conntrack Table Size (Linux)**

This topic explains how to manage the kernel firewall state table.

### **About Managing the State Table**

Conntrack is only supported on Linux systems, and IPFilter is supported on AIX and Solaris before version 11.4. Both are system-specific names for the *Kernel Firewall State Table*.


- Linux workloads: Manage the Conntrack table.
- AIX or Solaris workloads, versions 11.3 and earlier: Manage the IPFilter state table.
   For more information about AIX and Solaris, see Tuning the IP Filter State Table (AIX/Solaris) [243].

On Linux workloads, the VEN automatically increases and decreases the size of the Conntrack table as needed based on the number of active connections on the workload.

The VEN automatically increases the size to minimize the possibility of the workload running out of space in the Conntrack table and blocking valid connections.

The VEN uses the following behavior to manage the Conntrack table size:

- By default, the size of the Conntrack table starts at 1M. This is the baseline value. The baseline value is used as the starting point for automatically resizing the Conntrack table.
- Every 10 seconds, the VEN polls the table size to check the fill percentage.
- When the table reaches 80% of the maximum size, the VEN doubles the value set for the maximum size.
- The VEN doubles the maximum size value only 3 times (8x of the baseline value).
- For a 1M baseline value, the maximum table size after adjustment is 8M.

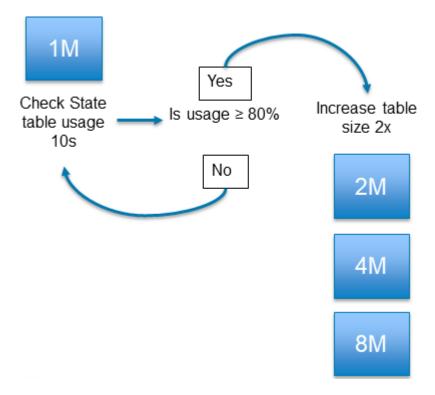

# **Customizing the VEN Adjustment Behavior**

If the Conntrack table is experiencing issues with the size limit, you can adjust the way by which the VEN automatically manages the table size. Adjust the VEN behavior by setting the following values in the VEN configuration file /etc/default/illumio-agent.

Setting	Default	Description
FW_STATE_TABLE_AU- TO_RESIZE	True	Indicates whether auto resize of the Conntrack table is required.
CONNTRACK_MAX	1000000	<ul> <li>Defines the maximum number of Conntrack table entries.</li> <li>Configures the system value for /proc/sys/net/nf_conntrack_max</li> </ul>
CONNTRACK_HASH_SIZE	256000	<ul> <li>Defines the starting size of the Conntrack hash table.</li> <li>Configures the system value for /sys/module/nf_conntrack/parameters/hashsize</li> </ul>



#### NOTE

When you install a VEN on a Linux workload, this feature is enabled by default using the default values. If you customize the values in the <code>illumio-agent</code> configuration file before installing the VEN, the custom values will apply on installation. If you customize the values after installing the VEN, you must restart the VEN for the values to take effect in runtime.

# **Restrictions for VEN Adjustment**

Customizing the VEN adjustment behavior has the following restrictions:

- The value you set for CONNTRACK\_HASH\_SIZE should be 25% of the value of CONNTRACK\_MAX.
- You must set the values to 512 or higher. If you set a value below 512, the Linux kernel will automatically adjust the value to 512.

## **VEN Firewall Tampering Detection**

The PCE distributes the latest policy applicable to each workload to ensure that the VEN receives the latest policy updates. The VEN internally creates and maintains a set of meta information of these rules, which it uses to detect tampering.

# **Automatic History of Firewall Changes**

Changes to the firewall on a workload are historically recorded for an audit trail. Up to 10 changes to the firewall history are saved. The history is viewable via the PCE Support Reports.

# **Host Firewall Tampering Protection**

During periodic tampering detection (default: every 10 mins), the VEN checks whether certain static configurations have changed, including whether the runtime IPSec policy is identical to the policy that the PCE generated.

If a host firewall is tampered with, firewall tampering protection start firewall validation procedure. If the outcome detects any of the Illumio-added rules have been tampered, then the restoration procedure starts.

The procedure attempts to fetch a new security policy from the PCE, but if it fails due to a network connectivity issue, you can try to recover your last known good copy of a policy stored locally. The last step is validating the policy against the meta information of the policy. The tampering attempt is reported to the PCE as an agent.tampering event.

A host firewall tampering event occurs when another administrator or an attacker:

- Adds a firewall rule to the Illumio firewall compartment.
- Modifies a firewall rule added by Illumio.
- Deletes a firewall rule added by Illumio.
- Deletes all firewall rules (flush) added by Illumio.

The norm is that Illumio tries to detect tampering attempts only to Illumio firewall policy only and not to others.

Work- load OS	Tampering Detection
Linux	The VEN monitors any underlying iptables, ipset, and IPsec changes. Once the VEN detects a tampering attempt, it validates the snapshot of iptables/ipset/IPsec against the firewall policy validation meta information.
Windows	The VEN monitors any changes in the Windows Filtering Platform (WFP) layer and the runtime IPsec policy. If it detects a change, it starts the validation and restore procedure.
AIX/Solaris	<ul> <li>On AIX (all versions) and Solaris (versions before 11.4), the VEN monitors any underlying ipfilter changes. If the VEN detects a tampering attempt, it validates the snapshot of the ipfilter against the firewall policy validation meta information.</li> <li>On Solaris versions 11.4 and later, the VEN checks packet filter.</li> <li>On AIX and Solaris, the feature is enabled by default and updated every 10 minutes.</li> <li>On AIX, the VEN monitors any changes in the runtime IPsec policy. If it detects a change, it starts the validation and restore procedure.</li> </ul>

# **Host Firewall Tampering Alerts**

Host firewall tampering alerts can be viewed:

- On the host VEN.
- In the PCE web console.
- In the return from a call to the /eventsIllumio Core REST API.
- In the return from a guery in Splunk or other SIEM software.

### **View Tampering Alerts on VEN Host**

Work- load OS	Procedure
Linux	As root, separately execute the following commands:
	Tail the VEN log file to see suspected tampering events and hash comparisons:
	<pre>\$ tail -f /opt/illumio_ven_data/log/platform.log</pre>
	INFO: Possible tamper detected INFO: FW iptables checksums (compares security policy hashes to see if anything changed)
Windows	Check \programdata\illumio\log\platform.log and search "!!!Tampering detected"
	This alter displays "Filtering Platform Policy Change" when a tampering event is detected. Double-click the alert for detailed information.

### **View Tampering Alerts Sent to PCE**

PCE Web Console

To view agent.tampering events in the PCE web console, navigate to **Troubleshooting > Events**.

Double-click an agent.tampering event to see its details.

Illumio Core REST APIs

To return all tampering events for an organization, execute the following command using your organization URI. For more information, see Events in the REST API Developer Guide.

Example Curl Command to Get Information for All agent.tampering Events:

```
$ curl -i -X GET https://pce.example.com:8443/api/v2/orgs/1/events/?
event_type=agent.tampering -H "Accept: application/json" -u $KEY:$TOKEN
```

Example Curl Command to Get Information for a Specific agent.tampering Event:

```
$ curl -i -X GET https://pce.example.com:8443/api/v2/orgs/1/events/
some_event_ID -H "Accept: application/json" -u $KEY:$TOKEN
```

Example JSON Response Body from Getting an agent.tampering Event:

```
{
    "href": "/orgs/1/events/some_event_ID",
    "timestamp": "2019-06-17T05:42:10.419Z",
```

```
"pce_fqdn": "someName.someDomain",
    "created_by": {
       "agent": {
            "href": "/orgs/1/agents/xxxxx",
            "hostname": "someHostname"
   },
    "event_type": "agent.tampering",
   "status": "success",
    "severity": "err",
    "action": {
       "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx",
        "api endpoint": "FILTERED",
        "api_method": "PUT",
        "http_status_code": 204,
       "src_ip": "xx.xxx.xx.xx"
   },
    "resource_changes": [],
    "notifications": [
            "uuid": "yyyyyyyy-yyyy-yyyy-yyyy-yyyyyyyyy",
"notification_type": "workload.oob_policy_changes",
            "info": {
                "tampering_revert_succeeded": true,
                "beginning_timestamp": "2019-06-17T05:42:10Z",
                "ending timestamp": "2019-06-17T05:42:10Z",
                "num_events": 1
       }
   ]
```

### **Splunk or Other SIEM Software**

If you send VEN events received by the PCE to Splunk or other SIEM software, query for agent.tampering events in accordance with the SIEM vendor's query procedures.

# **VEN Tampering Protection**

In Illumio Core and Illumio Endpoint 22.5.10 and later releases, you can protect the following types of VENs from unintended actions and tampering:

- Windows and Linux VENs running on servers
- Windows VENs running on endpoints

This feature protects the VEN itself from tampering versus protecting the workload host that the VEN is running on from being tampered with. For information about how the VEN detects tampering with the host firewall, see VEN Firewall Tampering Detection [246].

### **About Tampering Protection**



### NOTE

Before using this feature, complete the tasks in Requirements for Using Tampering Protection [250].

This feature protects VENs from unintended, accidental invocation of VEN CLI actions and installer commands that impact VEN functionality, and malicious attempts (including from System Administrators) to disable or uninstall the VEN, or otherwise render the VEN unusable.

Using this feature, you control the ability to run the following VEN administrative actions with the VEN CLI:

- Stopping the VEN; for information see Shut Down VENs. [223]
- Restarting the VEN; for information see Start Up VENs. [222]
- Suspending the VEN; for information, see VEN Suspension. [224]
- Deactivating the VEN; for information, see Deactivate Using VEN Command Line. [228]
- Unpairing the VEN from the PCE; for information, see Unpair Using VEN Command Line. [229]
- Upgrading the VEN on the server or endpoint; see the topics for managing the VENs using the CLI.



### NOTE

Providing a maintenance token is not required when upgrading VENs by using the PCE web console.

• Uninstalling the VEN from the server or endpoint; see the topics for managing the VENs using the CLI.



#### NOTE

Providing a maintenance token is not required when uninstalling VENs from workloads by using the PCE web console.

This tampering protection restricts VEN CLI commands issued by all users, including the users who have administrative or root access to the VEN hosts (servers and endpoints).

# **Requirements for Using VEN Tampering Protection**

To use this feature, you must complete the following requirements:

- 1. Enable the feature for your organization. See Enable VEN Tampering Protection [251].
- **2.** Generate a maintenance token for all VENs or for specific VENs that you want protected. See Generate VEN Maintenance Token. [251]

To generate this token, users must be part of one of the following Illumio Authorization roles:

- Global Organization Owner
- Global Administrators
- Workload Managers (only for the workloads to which the users have access)
   When you are part of the Workload Manager role, you can set up tampering protection for the VENs you have access to. See "Workload Manager Role" in the PCE Administration Guide for information.
- **3.** Include the token when running VEN CLI commands. See Manage VEN When Tampering Protection Enabled [252].

# **Enable VEN Tampering Protection**

Before you can generate maintenance tokens for VENs or use the tampering protection feature, you must enable it in the PCE web console for your organization.

1. From the PCE web console main menu, go to **Settings** > **VEN Operations**. The VEN Operations page appears.



### **IMPORTANT**

To access the Setting page for VEN Operations, you must be a memember of the Global Organization Owner role. You cannot enable the VEN tampering protection feature without this level of Illumio authorization.

- 2. Click **Edit** to configure VEN settings.
- **3.** In the Tampering Protection section, select **Yes** to require a maintenance token when running VEN commands on the VEN CTL.
- 4. Click Save.

### **Generate a VEN Maintenance Token**



#### NOTE

Before you generate a VEN and Endpoint maintenance token, you must enable the feature for your organization.

You can generate maintenance tokens for all your VENs or for a specific VEN.

1. To generate tokens for all your VENs, go to **Workloads and VENs** > **VENs** from the PCE web console main menu.

OR

To generate a token for a specific VEN, go to **Workloads and VENs** > **VENs** and click a VEN row to open the details page for that VEN.

When the tampering protection features is enabled for the PCE, the page includes a **Generate Maintenance Token** button. If the page does not include this button, you must enable the feature for your PCE. See Enable VEN Tampering Protection [251].

2. Click Generate Maintenance Token.

A dialog box **Generate Maintenance Token** appears where you can generate tokens for all VENs or the specific VEN you selected.

**3.** Specify the time period for the token: unlimited (it won't expire and need to be regenerated) or a set time period. By default, the dialog box specifies 7 days for the time period.

#### 4. Click Generate.

When ready, the dialog refreshes with the text string for the maintenance token and the timestamp for then the token was generated.

- **5.** Copy the text string for the token and store it in a secure location. You will need to provide this string on the command line when you run VEN commands using the VEN CLI.
- **6.** Click **Done** to close the dialog box.

### Manage a VEN when Tampering Protection Enabled

When you've enabled tampering protection for a VEN, you must include the new parameter maintenance-token <token> on the VEN command line after the action you want to run. See the following examples. On Windows, include one dash with the parameter (-maintenance-token <token>); on Linux, include two dashes (--maintenance-token <token>) to run the parameter.

When enabled, running the VEN actions without specifying the token will fail.



#### NOTE

Not all VEN actions support using a maintenance token for tampering protection. See About Tampering Protection [250] for the list of supported actions.

When enabled, the VEN validates the maintenance token and the token expiration date, and runs the commands as usual.

When the token expires, you can regenerate it in the PCE web console.

Example: Windows Command Line to Run Protected VENs

PS C:\Program Files\Illumio> .\illumio-ven-ctl.ps1 stop Maintenance token is required **for** this operation.

PS C:\Program Files\Illumio> .\illumio-ven-ctl.ps1 stop -maintenance-token eyJhY3Rpb25zIjpudWxsLCJleHBpcmVzX2F0IjpudWxsLCJhZ2VudF9pZHMiOm51bGwsIm9yZ19p ZCI6MX0=.MGUCMHSfLNS8yGHgFY0D3CuFvi+L8m6VUVI9FHRzT31sn37F+GsKecpSnbR8abYuSoz 2wgIxALhrtjAXZNN8unxLuN8WO/kcLONz7gwboRCT/

Sc2FdwXAkLvioh+9jyU8OBeAj5poA==Stopping venAgentMonitorSvc

Stopping venPlatformHandlerSvc

Stopping venVtapServerSvc

Stopping venAgentMgrSvc

Success

PS C:\Program Files\Illumio>

Example: Linux Command Line to Run Protected VENs

[root@localhost illumio\_ven]# ./illumio-ven-ctl unpair open noreport Maintenance token is required **for** this operation. [root@localhost illumio\_ven]# ./illumio-ven-ctl unpair --maintenance-token eyJhY3Rpb25zIjpudWxsLCJleHBpcmVzX2F0IjpudWxsLCJhZ2VudF9pZHMiOm51bGwsIm9yZ19p ZCI6MX0=.MGUCMHSfLNS8yGHgFY0D3CuFvi+L8m6VUVI9FHRzT31sn37F+GsKecpSnbR8abYuSoz

2wgIxALhrtjAXZNN8unxLuN8WO/kcLONz7gwboRCT/Sc2FdwXAkLvioh+9jyU8OBeAj5poA==

```
open noreport
Stopping venAgentMonitor:
                           ...done.
Stopping venVtapServer:
                        ...done.
Stopping IPSec:
                 ...done.
Stopping venPlatformHandler:
Stopping venAgentMgr:
                      ...done.
Checking agent state
   ...done.
 * Flush IPv4 ...done.
   ...done.
Unloading modules ...done.Illumio VEN is being
uninstalled...2023-01-17T12:51:01-0800 Uninstalling Illumio ........
2023-01-17T12:51:04-08:00 Stopped all daemons
2023-01-17T12:51:04-08:00 Init scripts disabled
2023-01-17T12:51:04-08:00 VEN state on uninstall: enforced
2023-01-17T12:51:04-0800 Deactivating Illumio VEN ......
2023-01-17T12:51:05-0800 Agent 15 Org 1 successfully deactivated
2023-01-17T12:51:05-0800 Deactivation complete
2023-01-17T12:51:05-08:00 /opt/illumio ven/system/etc/init.d/illumio-
firewall disable -w workload/c3364c6d-43f7-43fd-a4e4-9eb6258808b4/current
2023-01-17T12:51:07-08:00 Firewall Rules successfully restored
2023-01-17T12:51:07-08:00 Removed ilo-ven user entries
2023-01-17T12:51:07-08:00 Removed data distribution tree from /opt
2023-01-17T12:51:07-08:00 Removed binary distribution tree from /opt
2023-01-17T12:51:07-0800 Uninstall successful
VEN has been SUCCESSFULLY unpaired with Illumio
[root@localhost illumio_ven]#
```

## **Windows VEN Installer Changes**

When you enable the VEN tampering protection feature, the Windows VEN installer can include the new MAINTENANCE\_TOKEN parameter for the upgrade, uninstall, and repair commands, as shown in the following examples.

Upgrade a VEN

```
ven_installer.exe /install /quiet /log ven_install.log MAINTENANCE_TOKEN=xxx
```

Uninstall a VEN

```
ven_installer.exe /uninstall /quiet /log ven_uninstall.log
MAINTENANCE_TOKEN=xxx
```

Repair a VEN

```
ven_installer.exe /repair /quiet /log ven_repair.log MAINTENANCE_TOKEN=xxx
```

### **VEN Support Reports**

A workload's support report provides diagnostic information for selected workloads. To troubleshoot issues with your workloads, you can generate a support report and send it to Illumio support.



#### NOTE

Your PCE user account must have the Organization Owner or Admin user role to perform this task and the workload should be an active, managed workload.

## **Generate Support Report from PCE**

- 1. In the PCE web console, go to Servers & Endpoints > Workloads.
- 2. Click the **VENs** tab.
- **3.** In the **Name** column, click the link for the VEN for which you want to generate a support bundle.
- **4.** On the VEN's details page, click **Generate Support Bundle**. This process can take up to 10 minutes.
- **5.** You can view the status of the report in either of the following places:
  - While still on the VEN's detail page, scroll down to the VEN Support Bundle section.
  - Go to **Troubleshoot > VEN Support Bundles**.
- 6. Click **Download** to download the report.

## Generate Linux/AIX/Solaris Support Report Using CLI

If you need to troubleshoot VEN issues, you can generate a VEN support report from the command line for any workload and then send the report to Illumio support.

On Linux, AIX, and Solaris, the generated report is saved to the /tmp directory and overwrites any previously generated copy of the same report.



#### NOTE

You must have root privileges on the workload to run the support report command.

You can also run a VEN support report when you unpair a workload.

To generate a VEN support report for a Linux workload:

- 1. Establish a secure shell connection (SSH) to the Linux workload.
- 2. Execute the following command as root to generate the support report.

/opt/illumio\_ven/illumio-ven-ctl gen-supportreport

- **3.** Type Y when asked if you want to run the report.
- **4.** Optionally, if you want to bypass the confirmation prompt, you can execute the script with a -y or -Y option:

/opt/illumio\_ven/illumio-ven-ctl gen-supportreport -y

**5.** To view the report generation log, enter the following command:

more -n 10 -f /opt/illumio\_ven\_data/log/report.log

**6.** The support report generation is complete when "Successfully created report" or "Failed to create report" is logged. After the report is successfully generated, the report is sent to the PCE.

## **Generate Windows Support Report Using CLI**

If you need to troubleshoot VEN issues, you can generate a VEN support report from the command line for any workload and then send the report to Illumio Customer Support.

On Windows, the generated report is saved to the C:\Windows\Temp directory and overwrites any previously generated copy of the same report.

You can also run a support report when you unpair a workload.

To generate a VEN support report for a Windows workload:

- 1. Open PowerShell on a Windows workload.
- 2. Enter the following command to set the PowerShell execution policy:

Set-ExecutionPolicy -Scope process remotesigned -Force; Start-Sleep -s 3

3. Run the support report command:

```
& "${Env:ProgramFiles(x86)}\Illumio\Admin\supportreport.ps1"
```

**4.** Optionally, if you want to bypass the confirmation prompt, you can execute the script with the yes option:

```
& "${Env:ProgramFiles(x86)}\Illumio\Admin\supportreport.ps1" yes
```

**5.** To monitor the status of the report, enter the following command:

```
Get-Content "${Env:ProgramData}\Illumio\log\report.log" -Wait
```

- **6.** The support report generation is complete when "Successfully created report" or "Failed to create report" is logged. After the report is successfully generated, the report is sent to the PCE.
- 7. To reset the PowerShell execution policy, enter the following command:

```
Set-ExecutionPolicy -Scope process undefined -Force
```

### **VEN Troubleshooting**

This topic describes some important system administration considerations on Windows, useful tools, and a generalized set of actions to troubleshoot VEN operations. For information about troubleshooting VEN installation issues you might encounter when using the PCE web console, see "VEN Installation Troubleshooting" in the VEN Installation and Upgrade Guide.

### Windows: Enable Base Filtering Engine (BFE)

Windows BFE is a Windows subsystem that determines which packets should be allowed to the network stack. BFE is enabled by default. If you disable BFE on your Windows workload, all packets are sent to the TCP/IP stack bypassing BFE which can result in different behavior from one system to another. The worst case scenario is all the ingress and egress packets get dropped.

If you have disabled BFE on your Windows workload, re-enable it.

## Linux: ignored\_interface

The Linux ignored\_interface inhibits PCE policy updates.

Transitioning an enforced workload's interface from or to ignored\_interface might drop the dynamic, long-lived connections maintained by the system.

When a VEN interface is placed in the ignore\_interface list, the any flow state over the interface won't be kept by conntrack an longer. (The conntrack table on Linux stores information on network connections.) If the connection on TCP port 8444 to the PCE is reinitialized, any arriving packets from the PCE are dropped, because the packets do not have any state in conntrack.

The VEN heartbeat eventually restores connections, but meanwhile the VEN implements any policy sent by lightning bolt from the PCE.

## **VEN Troubleshooting Tools**

Illumio provides the following tools for VEN connectivity checking and troubleshooting VEN issues on workloads:

- A VEN connectivity checking tool called venconch for workloads is available on the Illumio Support site.
- A VEN compatibility checking feature is available in the PCE web console for paired workloads. See "VEN Compatibility Check" in the VEN Installation and Upgrade Guide.

## **Commands to Obtain Firewall Snapshot**

Run the following commands on the workload to get a copy of the logs and configured firewall settings.

#### Linux

- iptables-save
- ipset -L

#### Windows

• netsh wfp show state

#### **Solaris**

ipfstat -ionv

#### AIX

ipfstat -ionv

### **Troubleshooting Tips**

#### **Connectivity Issues**

Perform the following actions to identify why a workload is unreachable, cannot reach other workloads, or cannot communicate with the PCE:

- Determine if all workloads are unable to communicate or just a subset of the workloads are reported as disconnected. If the PCE reports that all workloads are offline, check if PCE is reachable from workloads.
- If a subset of workloads are down, check if there are differences in network configuration between those and the workloads that are connected, and if they are contributing to PCE being unreachable.
- Check if any workloads that are unable to communicate are located behind NAT devices, firewalls, or remote data centers.
- Ensure the following port configuration:
  - On Prem
    - Port 8443 HTTPS requests
    - Port 8444 long-lived TLS-over-TCP connection
  - SaaS
    - Port 443 for both HTTPS requests and the long-lived TLS-over-TCP connection
- If running in a public cloud instance:
  - For AWS, ensure security groups permit TCP port 443.
  - For Azure, ensure that Endpoints are configured to allow traffic.

#### **VEN Process Issues**

Check the status of the VEN-specific processes and ensure that they are running and active:

- Linux Run /opt/illumio/illumio-ven-ctl status
- **Windows:** Execute get-service in the PowerShell

Ensure the following processes are running and active:

- **Linux** venAgentManager, venPlatformHandler, venAgentLManager, VtapServer, and AgentMonitor
- Windows:venAgentLogMgrSvc, venPlatformHandler, venVtapServerSvc, and ilowfp

#### **Errors in the VEN Logs**

Review the VEN log files to find any errors generated by the system (sudo required):

• Logs in Data\_Dir/log directory

To look for any errors in the log files, execute grep -ir ERROR \*

To check for firewall updates, view the platform.log file. Look for logs related to firewall updates; for example:

```
2014-07-26T22:20:41Z INFO:: Enforcement mode is: XXXX
2014-07-26T22:20:41Z INFO:: Is fw update yes
2014-07-26T22:20:41Z INFO:: Is ipset update yes
2014-07-26T22:20:41Z INFO:: saved fw-json
```

Check heartbeat logs for records related to update messages from the PCE. See the following example heartbeats:

```
2014-07-26T22:43:12Z Received HELLO from EventService.
2014-07-26T22:43:12Z Sent ACK to EventService.
```

```
Events - f/w updates etc.
014-07-26T22:34:11Z Received EVENT from EventService.
2014-07-26T22:34:11Z Added EVENT from EventService to PLATFORM handler thread message queue
```

```
iptables-save | grep 443 | grep allow out
   -A tcp_allow_out -d 54.185.43.60/32 -p tcp -m multiport --dports 443
-m conntrack --ctstate NEW -j NFLOG --nflog-prefix "0x800000000000025f"
--nflog-threshold 1
   -A tcp_allow_out -d 54.185.43.60/32 -p tcp -m multiport --dports 443
-m conntrack --ctstate NEW -j ACCEPT
   -A tcp_allow_out -d 204.51.153.0/27 -p tcp -m multiport --dports 443
--nflog-threshold 1
   -A tcp_allow_out -d 204.51.153.0/27 -p tcp -m multiport --dports 443
-m conntrack --ctstate NEW -j ACCEPT
iptables-save | grep 444 | grep allow_out
   -A tcp_allow_out -d 54.185.43.60/32 -p tcp -m multiport --dports 444
--nflog-threshold 1
   -A tcp_allow_out -d 54.185.43.60/32 -p tcp -m multiport --dports 444
-m conntrack --ctstate NEW -j ACCEPT
```

#### **Policy Sync Might Require Reboot**

Persistent errors with policy sync on a workload can be cleared by rebooting the VEN.

### **Event Viewer Stops Logging**

After you upgrade the VEN, **Event Viewer** can stop logging so that the support report does not include windows\_evt\_application, windows\_evt\_system, and the system directory (e.g.: msinfo32). To correct the issue, close **Event Viewer** before upgrading the VEN. Then reopen **Event Viewer**.

# **Events Administration and REST APIs**

## **Overview of Events Administration**

This section describes how to do typical administration tasks related to PCE events.

## **Before You Begin**

Illumio recommends that you be familiar with the following technology:

- · Solid understanding of Illumio Core
- Familiarity with syslog
- Familiarity with your organizations' Security Information and Event Management (SIEM) systems

#### **About This Guide**

This guide provides the following information to administer your PCE deployment:

- An overview of events and SIEM integration
- Events setup considerations
- Event record formats, types, and common fields
- Event types by resource
- SIEM integration considerations and recommendations

See also the following related documentation:

- U.S. National Institute for Standards and Technology's NIST 800-92 Guide to Computer Security Log Management
- U.S. Department of Homeland Security National Cybersecurity Center

## **Notational Conventions in This Guide**

- Newly introduced terminology is italicized. Example: *activation code* (also known as pairing kev)
- Command-line examples are monospace. Example: illumio-ven-ctl --activate
- Arguments on command lines are monospace italics. Example: illumio-ven-ctl --activate activation\_code
- In some examples, the output might be shown across several lines but is actually on one single line.
- Command input or output lines not essential to an example are sometimes omitted, as indicated by three periods in a row. Example:

```
...
some command or command output
...
```

#### **Events Framework**


The Illumio events framework provides an information-rich, deep foundation for actionable insights into the operations of Illumio Core.

#### **Overview of the Framework**

Auditable events are records of transactions collected from the following management interfaces:

- PCE web console
- REST API
- PCE command-line tools
- VEN command-line tools

All actions that change the configuration of the PCE, security policy, and the VENs are recorded, including workload firewall tampering.

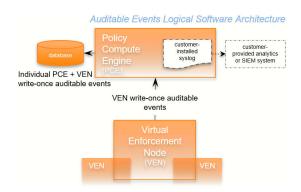

As required by auditing standards, every recorded change includes a reference to the program that made the change, the change's timestamp, and other fields. After recording, the auditable events are read-only.

Auditable events comply with the Common Criteria Class FAU Security Audit requirements standard for auditing.

## **Auditing Needs Satisfied by Framework**

Need	Description	See topic
Audit and Compli- ance	Evidence to show that resources are managed according to rules and regulatory standards.	Events Record Information [263]
Resource Lifecycle Tracking	All information necessary to track a resource through creation, modification, and deletion.	Events Lifecycle for Resources [261]
Operations	<b>Operations</b> Trace of recent changes to resources.	
Security	Evidence to show which changes failed, such as incorrect user permissions or failed authentication.	User Password Update Failed (JSON) [281]

#### **Benefits of Events Framework**

The events framework in the Illumio Core provides the following benefits:

- Exceeds industry standards
- Delivers complete content
  - Comprehensive set of event types
  - Includes more than 200 events
  - · Additional notable system events are generated
- Easily accessible interfaces to capture events:
  - Event Viewer in the PCE web console
  - · REST API with filtering
  - SIEM intregration
  - Events are the same across all interfaces
- Designed for customer ease of use
  - Flattened, common structure for all events
  - Eliminates former duplicate or multiple events for single actions
  - Streamed via syslog in JSON, CEF, or LEEF format
  - Create/Update/Delete REST APIs recorded as events
    Read APIs/GET requests are not recorded, because they do not change the Illumio Core.


## **Events Lifecycle for Resources**

Illumio resources progress through the lifecycle stages (creation, updating, deletion) and Illumio Core records them with the appropriate event types.

## **About the Lifecycle**

Many resources have a lifecycle from creation through update to deletion. For example, the events related to a security policy rule (identified by the resource name sec\_rule) are recorded with the following event types.

- sec\_rule.create
- sec\_rule.update: Update events record with the values of the resource object both before and after the event for a lifecycle audit trail.
- sec rule.delete

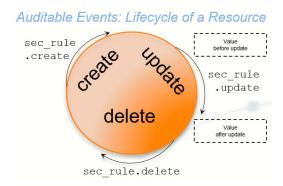

## **Other Resource Lifecycles**

Some resources have unique characteristics and do not follow the create-update-delete pattern. For example, workloads have the following event types:

- workload.update
- workload.upgrade
- workload.redetect network
- workload.recalc rules
- workload.soft\_delete
- workload.delete
- workload.undelete

## **Events Described**

This section describes the concepts and types of PCE events.

## **Event Types, Syntax, and Record Format**

When working with events, it is important to recognize their type, REST API schema, syntax, and record information.

## **Types of Events**

The Illumio Core includes the following general categories of auditable events:

- · Organizational events: Organizational events are further grouped by their source:
  - API-related events: Events occurring from a use of the REST API, including the PCE web console
  - System-related events: Events caused by some system-related occurrence
- Traffic events

#### **Anonymized Database Dumps**

To troubleshoot customer-reported issues, Illumio Customer Support sometimes requests that you supply an anonymized dump of the PCE database.

To safeguard your organization's privacy, the event information is not included in the anonymized database dump.

#### **REST API Events Schema**

The Events schema in JSON is downloadable from this documentation portal in the zipfile of the REST API schemas. From the documentation portal Home page, go to the **Develop** category > **REST API Public Schemas (Archive File)**.

### **Event Syntax**

The names of recorded auditable events in have the following general syntax:

resource.verb[.success\_or\_failure]

Where:

• resource is a PCE and VEN object, such as PCE user or VEN agent component.

- verb describes the action of the event on that resource.
- In CEF and LEEF formats, the success or failure of the verb is included in the recorded event type. This indicator is not needed in the JSON format.

### **Events Record Information**

The following information is included in a event record, which answers the who, what, where, how, and when:

Type of infor- mation	Description
Who	<ul> <li>VEN identified by hostname and agent href, and after Release 22.3, VEN href</li> <li>User identified by username and href</li> <li>PCE system identified by "system"</li> </ul>
What	The action that triggered the event, including the following data:
	<ul> <li>Resource type + operation + success or failure</li> <li>Application Request ID</li> <li>Status of successful events and failed events: <ul> <li>In case of failure, exception type and exception message.</li> <li>All failures related to security, such as authentication and authorization.</li> <li>Severity as INFO, WARNING, ERROR.</li> </ul> </li> <li>The pre-change and post-change values of the affected resources.</li> </ul>
Where	The target resource of the action, composed of the following data:  • Identifier of the target resource (primary field).  • Friendly name for the target resource. For example:  • workload/VEN: hostname  • user.username  • ruleset, label, service, etc: name, key/value
How	API endpoint, method, HTTP status code, and source IP address of the request.
When	Timestamp of the event's occurrence. This timestamp is $not$ the time the event was recorded.

### **Event Record Structure**

Regardless of export format (JSON, CEF, or LEEF), the records and fields for all events share a common structure. This common structure of composite events makes post-processing of event data easier.

Bulk change operations on many resources simultaneously are recorded as individual operations on the resource within a single composite event. Failed attempts to change a configuration, such as incorrect authentication, are also collected.

#### **Common Fields**

Field Name	Description
href	Unique event identifier; contains a UUID.
timestamp	Exact time that the event occurred in RFC 3339 format with fractional seconds.

Field Name	Description
pce_fqdn	The fully qualified domain name of the PCE; especially useful for Supercluster deployments or if there are multiple PCEs sending data to the SIEM server.
created_by	Identifies creator of the event; could be a user, the system, or a workload.
event_type	Name of the event; for more information, see the List of Event Types [265] table.
status	"Success" or "failure;" if the status is null, the event is for information only and doesn't indicate success or failure.
severity	"Informational," "warning," or "error" indicating the severity of the event.
version	Schema version for events.

## **Events Displayed in PCE Web Console**

The PCE web console provides an ongoing log of all Organization events that occur in the PCE. For example, Organization events capture actions such as users logging in and logging out, and failed login attempts; when a system object is created, modified, deleted, or provisioned; when a workload is paired or unpaired; and so on.

From the platform and API perspective, Organization events are referred to internally as auditable\_events and are generated by the auditable\_events\_service.

You can use the filter at the top of the page to search for events by type of event, event severity level, and when the event occurred.

### **Cross-Site Request Forgery Protection**

A cross-site request forgery (CSRF) is an attack that involves forcing a victim to send an HTTP request to a target destination without their knowledge or intent in order to perform an action as the victim. The underlying cause is an application functionality using predictable URL or form actions in a repeatable way. The nature of the attack is that CSRF exploits the trust that a website has for a user.

For more details on this attack, see the CSRF article on the Web Application Security Consortium website.

Illumio Core can notify you of this type of attack in the following ways:

- The PCE web console logs the attack as an Organization Event called "CSRF token validation failure."
- The event is logged in the Illumio Core REST API as authz\_csrf\_validation\_failure in the audit\_log\_events\_get.schema.
- The event authz\_csrf\_validation\_failure appears in the PCE syslog output if you have deployed the PCE as a software.



## **IMPORTANT**

When you see this event occur, you should immediately investigate the issue because the request might not have originated from a valid user.

## **List of Event Types**

The following table provides the types of JSON events generated and their description. For each of these events, the CEF/LEEF success or failure events generated are the event name followed by .success or .failure.

For example, the CEF/LEEF success event for agent.activate is agent.activate.success and the failure event is agent.activate.failure.

Each event can generate a variety of notification messages. See Notification Messages in Events [275].

JSON Event Type	Description
access_restriction.create	Access restriction created
access_restriction.delete	Access restriction deleted
access_restriction.update	Access restriction updated
agent.activate	Agent paired
agent.activate_clone	Agent clone activated
agent.clone_detected	Agent clone detected
agent.deactivate	Agent unpaired
agent.generate_maintenance_token	Generate maintenance token for any agent
agent.goodbye	Agent disconnected
agent.machine_identifier	Agent machine identifiers updated
agent.refresh_token	Agent refreshed token
agent.refresh_policy	Success or failure to apply policy on VEN
agent.request_upgrade	VEN upgrade request sent
agent.service_not_available	Agent reported a service not running
agent.suspend	Agent suspended
agent.tampering	Agent firewall tampered

JSON Event Type	Description
agent.unsuspend	Agent unsuspended
agent.update	Agent properties updated.
agent.update_interactive_users	Agent interactive users updated
agent.update_iptables_href	Agent updated existing iptables href
agent.update_running_cont ainers	Agent updated existing containers
agent.upload_existing_ip_table_rules	Agent existing IP tables uploaded
agent.upload_support_report	Agent support report uploaded
agent_support_report_request.create	Agent support report request created
agent_support_report_request.delete	Agent support report request deleted
agents.clear_conditions	Condition cleared from a list of VENs
agents.unpair	Multiple agents unpaired
api_key.create	API key created
api_key.delete	API key deleted
api_key.update	API key updated
auth_security_principal.create	RBAC auth security principal created
auth_security_principal.delete	RBAC auth security principal deleted
auth_security_principal.update	RBAC auth security principal updated
authentication_settings.update	Authentication settings updated
cluster.create	PCE cluster created
cluster.delete	PCE cluster deleted
cluster.update	PCE cluster updated
container_workload.update	Container workload updated
container_cluster.create	Container cluster created
container_cluster.delete	Container cluster deleted
container_cluster.update	Container cluster updated
container_cluster.update_label_map	Container cluster label mappings updated all at once
container_cluster.update_services	Container cluster services updated, created, or deleted by Kubelink
container_workload_profile.create	Container workload profile created

JSON Event Type	Description
container_workload_profile.delete	Container workload profile deleted
container_workload_profile.update	Container workload profile updated
database.temp_table_autocleanup_started	DB temp table cleanup started
database.temp_table_autocleanup_comple- ted	DB temp table cleanup completed
domain.create	Domain created
domain.delete	Domain deleted
domain.update	Domain updated
enforcement_boundary.create	Enforcement boundary created
enforcement_boundary.delete	Enforcement boundary deleted
enforcement_boundary.update	Enforcement boundary updated
event_settings.update	Event settings updated
firewall_settings.update	Global policy settings updated
group.create	Group created
group.update	Group updated
ip_list.create	IP list created
ip_list.delete	IP list deleted
ip_list.update	IP list updated
ip_lists.delete	IP lists deleted
ip_tables_rule.create	IP tables rules created
ip_tables_rule.delete	IP tables rules deleted
ip_tables_rule.update	IP tables rules updated
job.delete	Job deleted
label.create	Label created
label.delete	Label deleted
label.update	Label updated
label_group.create	Label group created
label_group.delete	Label group deleted
label_group.update	Label group updated

JSON Event Type	Description
labels.delete	Labels deleted
ldap_config.create	LDAP configuration created
ldap_config.delete	LDAP configuration deleted
ldap_config.update	LDAP configuration updated
ldap_config.verify_connection	LDAP server connection verified
license.delete	License deleted
license.update	License updated
login_proxy_ldap_config.create	Interservice call to login service to create LDAP config
login_proxy_ldap_config.delete	Interservice call to login service to delete LDAP config
login_proxy_ldap_config.update	Interservice call to login service to update LDAP config
login_proxy_ldap_config.verify_connection	Interservice call to login service to verify connection to the LDAP server
login_proxy_msp_tenants.create	New MSP tenant created
login_proxy_msp_tenants.delete	MSP tenant deleted
login_proxy_msp_tenants.update	MSP tenant updated
login_proxy_orgs.create	New managed organization created
login_proxy_orgs.delete	Managed organization deleted
login_proxy_orgs.update	Managed organization updated
lost_agent.found	Lost agent found
network.create	Network created
network.delete	Network deleted
network.update	Network updated
network_device.ack_enforcement_instruc- tions_applied	Enforcement instruction applied to a network device
network_device.assign_workload	Existing or new unmanaged workload assigned to a network device
network_device.create	Network device created
network_device.delete	Network device deleted
network_device.update	Network device updated
network_devices.ack_multi_enforce- ment_instructions_applied	Enforcement instructions applied to multiple network devices

JSON Event Type	Description
network_endpoint.create	Network endpoint created
network_endpoint.delete	Network endpoint deleted
network_endpoint.update	Network endpoint updated
network_enforcement_node.activate	Network enforcement node activated
network_enforcement_node.clear_condi- tions	Network enforcement node conditions cleared
network_enforcement_node.deactivate	Network enforcement node deactivated
network_enforcement_node.degraded	Network enforcement node failed or primary lost connectivity to secondary
network_enforcement_node.missed_heart- beats	Network enforcement node did not heartbeat for more than 15 minutes
network_enforcement_node.missed_heart- beats_check	Network enforcement node missed heartbeats check
network_enforcement_node.network_devi- ces_network_endpoints_workloads	Workload added to network endpoint
network_enforcement_node.policy_ack	Network enforcement node acknowledgment of policy
network_enforcement_node.request_policy	Network enforcement node policy requested
network_enforcement_node.update	Updated the target PCE of the network enforcement node
network_enforcement_node.update_status	Network enforcement node reports when switches are not reachable
network_enforcement_nodes.clear_condi- tions	A condition was cleared from a list of network enforcement nodes
nfc.activate	Network function controller created
nfc.delete	Network function controller deleted
nfc.update_discovered_virtual_servers	Network function controller virtual servers discovered
nfc.update_policy_status	Network function controller policy status
nfc.update_slb_state	Network function controller SLB state updated
org.create	Organization created
org.recalc_rules	Rules for organization recalculated
org.update	Organization information updated
pairing_profile.create	Pairing profile created
pairing_profile.create_pairing_key	Pairing profile pairing key created

JSON Event Type	Description
pairing_profile.delete	Pairing profile deleted
pairing_profile.update	Pairing profile updated
pairing_profile.delete_all_pairing_keys	Pairing keys deleted from pairing profile
pairing_profiles.delete	Pairing profiles deleted
password_policy.create	Password policy created
password_policy.delete	Password policy deleted
password_policy.update	Password policy updated
permission.create	RBAC permission created
permission.delete	RBAC permission deleted
permission.update	RBAC permission updated
radius_config.create	Create domain RADIUS configuration
radius_config.delete	Delete domain RADIUS configuration
radius_config.update	Update domain RADIUS configuration
radius_config.verify_shared_secret	Verify RADIUS shared secret
request.authentication_failed	API request authentication failed
request.authorization_failed	API request authorization failed
request.internal_server_error	API request failed due to internal server error
request.service_unavailable	API request failed due to unavailable service
request.unknown_server_error	API request failed due to unknown server error
resource.create	Login resource created
resource.delete	Login resource deleted
resource.update	Login resource updated
rule_set.create	Rule set created
rule_set.delete	Rule set deleted
rule_set.update	Rule set updated
rule_sets.delete	Rule sets deleted
saml_acs.update	SAML assertion consumer services updated
saml_config.create	SAML configuration created

JSON Event Type	Description
saml_config.delete	SAML configuration deleted
saml_config.pce_signing_cert	Generate a new cert for signing SAML AuthN requests
saml_config.update	SAML configuration updated
saml_sp_config.create	SAML Service Provider created
saml_sp_config.delete	SAML Service Provider deleted
saml_sp_config.update	SAML Service Provider updated
sec_policy.create	Security policy created
sec_policy_pending.delete	Pending security policy deleted
sec_policy.restore	Security policy restored
sec_rule.create	Security policy rules created
sec_rule.delete	Security policy rules deleted
sec_rule.update	Security policy rules updated
secure_connect_gateway.create	SecureConnect gateway created
secure_connect_gateway.delete	SecureConnect gateway deleted
secure_connect_gateway.update	SecureConnect gateway updated
security_principal.create	RBAC security principal created
security_principal.delete	RBAC security principal bulk deleted
security_principal.update	RBAC security principal bulk updated
security_principals.bulk_create	RBAC security principals bulk created
service.create	Service created
service.delete	Service deleted
service.update	Service updated
service_account.create	Service account created
service_account.delete	Service account deleted
service_account.update	Service account updated
service_binding.create	Service binding created
service_binding.delete	Service binding created
service_bindings.delete	Service bindings deleted

JSON Event Type	Description
service_bindings.delete	Service binding deleted
services.delete	Services deleted
settings.update	Explorer settings updated
slb.create	Server load balancer created
slb.delete	Server load balancer deleted
slb.update	Server load balancer updated
support_report.upload	Support report uploaded
syslog_destination.create	syslog remote destination created
syslog_destination.delete	syslog remote destination deleted
syslog_destination.update	syslog remote destination updated
system_task.agent_missed_heart- beats_check	Agent missed heartbeats
<pre>system_task.agent_missing_heartbeats_af- ter_upgrade</pre>	VEN missing heartbeat after upgrade
system_task.agent_offline_check	Agents marked offline
system_task.agent_self_sign- ed_certs_check	VEN self signed certificate housekeeping check
<pre>system_task.agent_settings_invalida- tion_error_state_check</pre>	VEN settings invalidation error state check
system_task.agent_uninstall_timeout	VEN uninstall timeout
system_task.clear_auth_recover_condition	Clear VEN authentication recovery condition
system_task.compute_policy_for_unman- aged_workloads	Compute policy for unmanaged workloads
<pre>system_task.delete_expired_service_ac- count_api_keys</pre>	An expired service account api_key was successfully deleted
<pre>system_task.delete_old_cached_perspec- tives</pre>	Delete old cached perspectives
system_task.endpoint_offline_check	Endpoint marked offline
<pre>system_task.provision_container_clus- ter_services</pre>	Container cluster services provisioned
system_task.prune_old_log_events	Event pruning completed
system_task.remove_stale_zone_subsets	Stale zone subnets removed
system_task.set_server_sync_check	Set server synced

JSON Event Type	Description
system_task.vacuum_deactiva- ted_agent_and_deleted_workloads	Deactivated and deleted workloads have been vacuumed
traffic_collector_setting.create	Traffic collector setting created
traffic_collector_setting.delete	Traffic collector setting deleted
traffic_collector_setting.update	Traffic collector setting updated
trusted_proxy_ips.update	Trusted proxy IPs created or updated
user.accept_invitation	User invitation accepted
user.authenticate	User authenticated
user.create	User created
user.delete	User deleted
user.invite	User invited
user.login	User logged in
user.login_session_terminated	User login session terminated
user.logout	User logged
user.pce_session_terminated	User session terminated
user.reset_password	User password reset
user.sign_in	User session created
user.sign_out	User session terminated
user.update	User information updated
user.update_password	User password updated
user.use_expired_password	User entered expired password
user.verify_mfa	User verified MFA
users.auth_token	Auth token returned for user authentication on PCE
user_local_profile.create	User local profile created
user_local_profile.delete	User local profile deleted
user_local_profile.reinvite	User local profile reinvited
user_local_profile.update_password	User local password updated
ven_settings.update	VEN settings updated
ven_software.upgrade	VEN software release upgraded

JSON Event Type	Description
ven_software_release.create	VEN software release created
ven_software_release.delete	VEN software release deleted
ven_software_release.deploy	VEN software release deployed
ven_software_release.update	VEN software release updated
<pre>ven_software_releases.set_default_ver- sion</pre>	Default VEN software version set
virtual_server.create	Virtual server created
virtual_server.delete	Virtual server created
virtual_server.update	Virtual server updated
virtual_service.create	Virtual service created
virtual_service.delete	Virtual service deleted
virtual_service.update	Virtual service updated
virtual_services.bulk_create	Virtual services created in bulk
virtual_services.bulk_update	Virtual services updated in bulk
vulnerability.create	Vulnerability record created
vulnerability.delete	Vulnerability record deleted
vulnerability.update	Vulnerability record updated
vulnerability_report.delete	Vulnerability report deleted
vulnerability_report.update	Vulnerability report updated
workload.create	Workload created
workload.delete	Workload deleted
workload.online	Workload online
workload.recalc_rules	Workload policy recalculated
workload.redetect_network	Workload network redetected
workload.undelete	Workload undeleted
workload.update	Workload settings updated
workload.upgrade	Workload upgraded
workload_interface.create	Workload interface created
workload_interface.delete	Workload interface deleted

JSON Event Type	Description
workload_interface.update	Workload interface updated
workload_interfaces.update	Workload interfaces updated
	For example, IP address changes, new interface added, and interface shut down.
workload_service_report.update	Workload service report updated
workload_settings.update	Workload settings updated
workloads.apply_policy	Workloads policies applied
workloads.bulk_create	Workloads created in bulk
workloads.bulk_delete	Workloads deleted in bulk
workloads.bulk_update	Workloads updated in bulk
workloads.remove_labels	Workloads labels removed
workloads.set_flow_reporting_frequency	Workload flow reporting frequency changed
workloads.set_labels	Workload labels applied
workloads.unpair	Workloads unpaired
workloads.update	Workloads updated

## **Notification Messages in Events**

Events can generate a variety of notifications that are appended after the event type:

- agent.clone\_detected
- agent.fw\_state\_table\_threshold\_exceeded
- agent.missed\_heartbeats
- agent.missing\_heartbeats\_after\_upgrade
- agent.policy\_deploy\_failed
- agent.policy\_deploy\_succeeded
- agent.process\_failed
- agent.service\_not\_available
- agent.upgrade\_requested
- agent.upgrade\_successful
- agent.upgrade\_time\_out
- container\_cluster.duplicate\_machine\_id
- $\bullet \ {\tt container\_cluster.region\_mismatch}$
- container\_workload.invalid\_pairing\_config
- container\_workload.not\_created
- database.temp\_table\_autocleanup\_completed
- database.temp\_table\_autocleanup\_started
- hard\_limit.exceeded
- pce.application\_started

- pce.application\_stopped
- remote\_syslog.reachable
- remote\_syslog.unreachable
- request.authentication\_failed
- request.authorization\_failed
- request.internal\_server\_error
- request.invalid
- request.service\_unavailable
- request.unknown\_server\_error
- sec\_policy.restore
- soft\_limit.exceeded
- system\_task.event\_pruning\_completed
- system\_task.hard\_limit\_recovery\_completed
- user.csrf\_validation\_failed
- user.login\_failed
- user.login\_failure\_count\_exceeded
- user.login\_session\_created
- user.login\_session\_terminated
- user.pce\_session\_created
- user.pce\_session\_terminated
- user.pw\_change\_failure
- user.pw\_changed
- user.pw\_complexity\_not\_met
- user.pw\_reset\_completed
- user.pw\_reset\_requested
- virtual\_service.not\_created
- workload.duplicate\_interface\_reported
- workload.nat\_rules\_present
- workload.offline\_after\_ven\_goodbye
- workload.online
- workload.oob\_policy\_changes
- workload.partial\_policy\_delivered
- workload.update\_mismatched\_interfaces
- workloads.flow\_reporting\_frequency\_updated

### **Common Criteria Only Events**

The following table lists the types of JSON events that are generated and their descriptions.

For each of these events, the CEF/LEEF success or failure events generated are the event name followed by .success or .failure.

For example, the CEF/LEEF success event for agent.update is agent.update.success and the failure event is agent.update.failure.

JSON Event Type	Description
pce.application_started	PCE application started

JSON Event Type	Description
pce.application_stopped	PCE application stopped
remote_syslog.reachable	Remote syslog destination reachable
remote_syslog.unreachable	Remote syslog destination not reachable
tls_channel.establish	TLS channel established
tls_channel.terminate	TLS channel terminated

## **View and Export Events**

By default, you can view events in the PCE web console or by using the PCE command line. You can then export Organization events using the PCE web console.

## **View Events in PCE Web Console**


By default, the PCE web console shows events that occur in your organization, such as when a workload is paired, if a pairing failed, when a user logs in or logs out, when a user fails to authenticate, and so on.

If you want to see only certain events you can filter by event type to see events that interest you most. You can also search for Organization events by their universally unique identifier (UUID), and filter events by their severity.

You can also export the list of organization events as a CSV file.

To view Organization events:

- 1. From the PCE web console menu, choose **Troubleshooting** > **Events**.
- 2. As the top of the page, you can use the Event Filter to filter the list by event type.

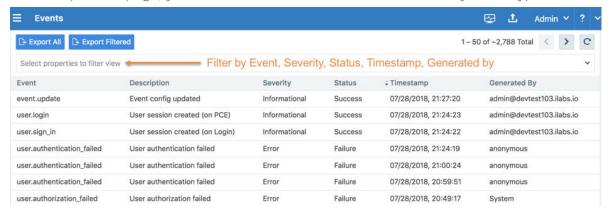



#### NOTE

In the Events Viewer, the suggested values for the filters are generated from all possible values. For example, the "Generated By" filter shows all users on the system. However, the actual results displayed by that filter might not contain any data.

### **VEN Event Not Displayed in PCE Web Console**

The following events related to VENs are not currently viewable in the PCE web console. This is a two-column list of event names.

VEN Events not shown in PCE Web Console		
fw_tampering_revert_failure	lost_agent	
fw_tampering_reverted	missing_os_updates	
fw_tampering_subsystem_failure	pce_incompat_api_version	
invoke_powershell_failure	pce_incompat_version	
ipsec_conn_state_change	pce_reachable	
ipsec_conn_state_failure	pce_unreachable	
ipsec_monitoring_failure	proc_config_failure	
ipsec_monitoring_started	proc_envsetup_failure	
ipsec_monitoring_stopped	proc_init_failure	
ipsec_subsystem_failure	proc_malloc_failure	
ipsec_subsystem_started	proc_restart_failure	
ipsec_subsystem_stopped	proc_started	
refresh_token_failure	proc_stopped	
refresh_token_success		

### **VEN href Added to Events Information**

After the 22.3.0 upgrade, all events created by a VEN includes the VEN href as well as the previously included Agent href. The VEN href can be used to query the VEN API, obtain the workload record, and execute various operations on the VEN from the PCE.

## **View Events Using PCE Command Line**

Run this command at any runlevel to display:

- The total number of events
- The average number of events per day

\$ sudo -u ilo-pce illumio-pce-db-management events-db events-db-show

Run this command at any runlevel to display:

- The amount of disk space used by events
- The total number of events


\$ sudo -u ilo-pce illumio-pce-db-management events-db disk-usage-show

## **Export Events Using PCE Web Console**


You can export all Organization events, or export a filtered list organization events to a CSV file

To export events:

- 1. From the PCE web console menu, choose **Troubleshooting** > **Events**. You see a list of events based on the activities performed.
- 2. Click Export > Export All to export all Organization events.
- **3.** To export a filtered list of a events, filter the list and then click **Export > Export Filtered** to export only the filtered view.
- **4.** To search for events based on event type, severity, status, timestamp, and who generated them, use the search filter:

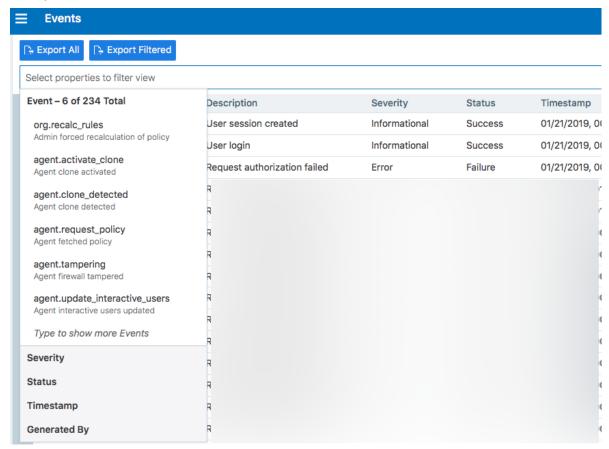

**5.** For a faster filtering via the browser, use the following field:

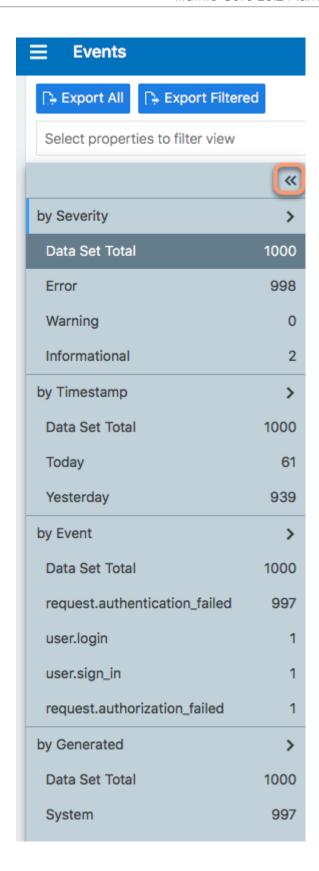

# **Examples of Events**

This section presents examples of recorded events in JSON, CEF, and LEEF for various auditing needs.

## **User Password Update Failed (JSON)**

This example event shows a user password change that failed validation. Event type user.update\_password shows "status": "failure", and the notification shows that the user's attempted new password did not meet complexity requirements.

```
"href": "/orgs/1/events/xxxxxxxx-39bd-43f1-a680-cc17c6984925",
        "timestamp": "2018-08-29T22:07:00.978Z",
        "pce_fqdn": "pcel.bigco.com",
        "created_by": {
              "system": {}
        },
        "event_type": "user.update_password",
        "status": "failure",
        "severity": "info",
        "action": {
               "uuid": "xxxxxxxx-a5f7-4975-a2a5-b4dbd8b74493",
               "api_endpoint": "/login/users/password/update",
               "api_method": "PUT",
               "http_status_code": 302,
               "src_ip": "10.3.6.116"
        "resource_changes": [],
        "notifications": [{
               "uuid": "xxxxxxxx-7b8e-4205-a62a-1f070d8a0ee2",
               "notification_type": "user.pw_complexity_not_met",
               "info": null
        }, {
               "uuid": "xxxxxxxx-9721-4971-b613-d15aa67a4ee7",
               "notification_type": "user.pw_change_failure",
               "info": {
                       "reason": "Password must have minimum of 1 new
character(s)"
        }],
        "version": 2
```

## **Resource Updated (JSON)**

This example shows the before and after values of a successful update event rule\_set.update. The name of the ruleset changed from "before": "rule\_set\_2" to "after": "rule\_set\_3".

```
{ "href": "/orgs/1/events/xxxxxxxx-8033-4f1a-83e9-fde57c425807",
   "timestamp": "2018-08-29T22:04:04.733Z",
   "pce_fqdn": "pce1.bigco.com",
   "created_by": {
    "user": {
    "href": "/users/1",
    "username": "albert.einstein@bigco.com"
}
},
   "event_type": "rule_set.update",
   "status": "success",
```

```
"severity": "info",
"action": {
"uuid": "xxxxxxxx-7488-480b-9ef9-0cd2a8496004",
"api_endpoint": "/api/v2/orgs/1/sec_policy/draft/rule_sets/6",
"api method": "PUT",
"http_status_code": 204,
"src_ip": "10.3.6.116"
},
"resource_changes": [{
"uuid": "xxxxxxxx-1d13-4e5e-8f0b-e0e8bccc44e0",
"resource": {
"rule_set": {
"href": "/orgs/1/sec_policy/draft/rule_sets/6",
"name": "rule_set_3",
"scopes": [
[ {
"label": {
"href": "/orgs/1/labels/19",
"key": "app",
"value": "app2"
}, {
"label": {
"href": "/orgs/1/labels/20",
"key": "env",
"value": "env2"
}, {
"label": {
"href": "/orgs/1/labels/21",
"key": "loc",
"value": "loc2"
} ]
1
"changes": {
"name": {
"before": "rule_set_2",
"after": "rule set 3"
},
"change_type": "update"
"notifications": [],
"version": 2
```

## **Security Rule Created (JSON)**

In this example of a successful sec\_rule composite event, a new security rule is created. Because this is a creation event, the before values are null.

```
{ "href": "/orgs/1/events/xxxxxxxx-6d29-4905-ad32-ee863fb63697", "timestamp": "2018-08-29T21:48:28.954Z",
```

```
"pce_fqdn": "pce24.bigco.com",
"created by": {
"user": {
"href": "/users/1",
"username": "albert.einstein@bigco.com"
},
"event_type": "sec_rule.create",
"status": "success",
"severity": "info",
"action": {
"uuid": "xxxxxxxx-165b-4e06-aaac-60e4d8b0b9a0",
"api_endpoint": "/api/v2/orgs/1/sec_policy/draft/rule_sets/1/sec_rules",
"api_method": "POST",
"http_status_code": 201,
"src_ip": "10.6.1.156"
},
"resource_changes": [{
"uuid": "9fcf6feb-bf25-4de8-a68a-a50598df4cf6",
"resource": {
"sec_rule": {
"href": "/orgs/1/sec_policy/draft/rule_sets/1/sec_rules/5"
},
"changes": {
"rule list": {
"before": null,
"after": {
"href": "/orgs/1/sec_policy/draft/rule_sets/1"
"description": {
"before": null,
"after": "WinRM HTTP/HTTPS and RDP"
"type": {
"before": null,
"after": "SecRule"
},
"resolve_labels": {
"before": null,
"after": "1010"
},
"providers": {
"created": [{
"provider": true,
"actors": "ams"
} ]
},
"consumers": {
"created": [{
"provider": false,
"actors": "ams"
"provider": false,
```

```
"ip_list": {
"href": "/orgs/1/sec_policy/draft/ip_lists/1"
}
}]
},
"ingress_services": {
"created": [{
"href": "/orgs/1/sec_policy/draft/services/7",
"name": "WinRM HTTP/HTTPS and RDP"
}]
},
"change_type": "create"
}],
"notifications": [],
"version": 2
}
```

# **User Logged In (JSON)**

```
"timestamp": "2019-06-25T23:34:12.948Z",
"pce_fqdn": "someFullyQualifiedDomainName",
"created_by": {
 "user": {
   "href": "/users/1",
   "username": "someUser@someDomain"
 }
},
"event_type": "user.sign_in",
"status": "success",
"severity": "info",
"action": {
 "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx",
 "api_endpoint": "/login/users/sign_in",
 "api_method": "POST",
 "http_status_code": 302,
 "src_ip": "xxx.xxx.xx.x"
},
"resource_changes": [
   "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxx",
   "resource": {
     "user": {
       "href": "/users/1",
       "type": "local",
       "username": "someUser@someDomain"
   },
    "changes": {
     "sign_in_count": {
       "before": 4,
       "after": 5
```

```
"change_type": "update"
],
"notifications": [
   "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxx",
   "notification_type": "user.login_session_created",
   "info": {
     "user": {
       "href": "/users/1",
       "type": "local",
       "username": "someUser@someDomain"
]
"timestamp": "2019-06-25T23:34:15.147Z",
"pce_fqdn": "someFullyQualifiedDomainName",
"created_by": {
 "user": {
   "href": "/users/1",
   "username": "someUser@someDomain"
 }
},
"event_type": "user.login",
"status": "success",
"severity": "info",
"action": {
  "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxx",
 "api_endpoint": "/api/v2/users/login",
 "api_method": "GET",
 "http_status_code": 200,
 "src_ip": "xxx.xxx.xx.x"
},
"resource_changes": [
],
"notifications": [
    "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx",
    "notification_type": "user.pce_session_created",
    "info": {
     "user": {
       "href": "/users/1",
       "username": "someUser@someDomain"
]
```

## **User Logged Out (JSON)**

```
"timestamp": "2019-06-25T23:35:16.636Z",
"pce_fqdn": "someFullyQualifiedDomainName",
"created_by": {
 "user": {
   "href": "/users/1",
   "username": "someUser@someDomain"
"event_type": "user.sign_out",
"status": "success",
"severity": "info",
"action": {
 "uuid": "xxxxxxxx-xxxx-xxxx-xxxxxxxxxx",
 "api_endpoint": "/login/logout",
 "api_method": "GET",
 "http_status_code": 302,
 "src_ip": "xxx.xxx.xx.x"
"resource_changes": [
],
"notifications": [
   "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx",
   "notification_type": "user.login_session_terminated",
   "info": {
     "reason": "user_logout",
     "user": {
      "href": "/users/1",
       "username": "someUser@someDomain"
 }
]
"timestamp": "2019-06-25T23:35:16.636Z",
"pce_fqdn": "someFullyQualifiedDomainName",
"created_by": {
 "user": {
   "href": "/users/1",
   "username": "someUser@someDomain"
},
"event_type": "user.sign_out",
"status": "success",
"severity": "info",
"action": {
"uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx",
```

```
"api_endpoint": "/login/logout",
  "api_method": "GET",
  "http_status_code": 302,
 "src_ip": "xxx.xxx.xx.x"
"resource_changes": [
],
"notifications": [
    "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx",
   "notification_type": "user.login_session_terminated",
    "info": {
      "reason": "user_logout",
      "user": {
        "href": "/users/1",
       "username": "someUser@someDomain"
 }
]
```

## **Login Failed — Incorrect Username (JSON)**

```
"timestamp": "2019-06-25T23:35:41.560Z",
"pce_fqdn": "someFullyQualifiedDomainName",
"created_by": {
 "system": {
"event_type": "user.sign_in",
"status": "failure",
"severity": "info",
"action": {
 "uuid": "someFullyQualifiedDomainName",
 "api_endpoint": "/login/users/sign_in",
 "api method": "POST",
 "http_status_code": 200,
 "src_ip": "xxx.xxx.xx.x"
},
"resource_changes": [
],
"notifications": [
   "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxx",
   "notification_type": "user.login_failed",
   "info": {
     "associated_user": {
       "supplied_username": "invalid_username@someDomain"
```

```
}
]
}
```

## Login Failed — Incorrect Password (JSON)

```
"timestamp": "2019-06-25T23:35:27.649Z",
"pce_fqdn": "someFullyQualifiedDomainName",
"created_by": {
 "system": {
 }
"event_type": "user.sign_in",
"status": "failure",
"severity": "info",
"action": {
  "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx",
 "api_endpoint": "/login/users/sign_in",
 "api_method": "POST",
 "http status code": 200,
 "src_ip": "xxx.xxx.xx.x"
},
"resource_changes": [
],
"notifications": [
   "uuid": "xxxxxxxx-xxxx-xxxx-xxxx-xxxxxxxxxxx",
   "notification_type": "user.login_failed",
   "info": {
     "associated user": {
       "supplied_username": "someUser@someDomain"
   }
 }
]
```

### **User Log Out (CEF)**

This example of an event record in CEF shows a successful user log out.

```
CEF:0|Illumio|PCE|19.3.0|user.logout.success|User Logout Success|1|rt=Mar 06 2020

18:38:59.900 +0000 dvchost=mypce.com duser=system dst=10.6.5.4

outcome=success
cat=audit_events request=/api/v2/users/logout_from_jwt requestMethod=POST reason=204
cs2= cs2Label=resource_changes
cs4=[{"uuid":"b5ba8bf0-7ca8-47fc-870f-6c61ddc1648d",
"notification_type":"user.pce_session_terminated","info":
{"reason":"user_logout",
"user":{"href":"/users/1","username":"testuser@mypce.com"}}}]
cs4Label=notifications
```

cn2=2 cn2Label=schema-version cs1Label=event\_href cs1=/system\_events/e97bd255-4316-4b5e-a885-5b937f756f17

## **Workload Security Policy Updated (LEEF)**

This example of an event record in LEEF shows a successful update of security policy for a workload's Ethernet interfaces.

```
LEEF: 2.0 | Illumio | PCE | 18.2.0 | interface_status.update.success |
src=xx.xxx.xxx.xxx
cat=organizational devTime=someUTCdatetime devTimeFormat=yyyy-mm-
dd'T'HH:mm:ss.tttttZ
sev=1
usrName=albert.einstein url=/orgs/7/agents/someUUID version=2
pce_fqdn=someFQDN
created_by={ "agent": { "href": "/orgs/7/agents/
someUUID", "hostname": "someHostname"}}
action={"uuid":"someUUID",
"api_endpoint":"/api/v6/orgs/7/agents/xxxxxx/interface_statuses/update",
"api_method":"PUT","http_status_code":200,"src_ip":"someIP"}
resource_changes=[{"uuid": "someUUID",
"resource":{"workload":{"href":"/orgs/7/workloads/someUUID","name":null,
"hostname": "someHostname",
"labels":[{"href":"/orgs/7/labels/
xxxxxx", "key": "loc", "value": "test_place_1"},
{"href":"/orgs/7/labels/xxxxxx","key":"env","value":"test_env_1"},
{"href":"/orgs/7/labels/xxxxxx","key":"app","value":"test_app_1"},
{"href":"/orgs/7/labels/xxxxxx","key":"role","value":"test_access_1"}]}},
"changes": { "workload interfaces":
{"updated":[{"resource":
{"href":"/orgs/7/workloads/someUUID/interfaces/eth1","name":"eth0","
address":{"family":2,"addr":xxxxxxxxx,"mask_addr":someMask}},
"changes":{ "address":{ "before":null, "after":
{ "family":2, "addr":xxxxxxxxx, "mask addr":someMask } },
"cidr_block":{"before":null, "after":16}, "default_gateway_address":
{"before":null, "after":
{"family":2, "addr":someGateway, "mask_addr":someMask}},
"link_state":{"before":"unknown", "after":"up"},
"network":{"before":null, "after":{"href":"/orgs/7/networks/xx"}},
"network_detection_mode":{"before":null, "after": "single_private_brn"}}},
{"resource":{"href":"/orgs/7/workloads/someUUID/interfaces/eth1",
"name": "eth1", "address":
{ "family":2, "addr":someAddress, "mask addr":someMask } },
"changes":{ "address":{ "before":null, "after":{ "family":2, "addr":someAddress,
"mask_addr":someMask}},
"cidr_block":{"before":null, "after":16}, "link_state":
{"before": "unknown", "after": "up"},
"network":{"before":null, "after":{"href":"/orgs/7/networks/xx"}},
"network_detection_mode":{"before":null, "after": "single_private_brn"}}}]}},
"change_type": "update" ] notifications=[] event_href=/orgs/7/events/someUUID
```

#### **Differences from Previous Releases**

The following table indicates which event names changed in the Illumio Core 18.2 release. If you are upgrading from a release prior to 18.2, be sure to use the current event name in your alert monitoring system.

# **Changed VEN Event Names**

This table lists the names of VEN-related events prior to the Illumio Core 18.2 release and the names they were changed to in the 18.2 release.

Old Name Prior to 18.2	New Name as of 18.2
fw_config_change	agent.firewall_config
activation_success	agent.activate
activation_failure	
deactivation_success	agent.deactivate
deactivation_failure	

# **Events Monitoring Best Practices**

The Illumio Core generates a rich stream of structured messages that provide the following information:

- Illumio PCE system health
- Illumio PCE notable activity
- Illumio VEN notable activity

Illumio Core events are structured and actionable. Using the event data, you can identify the severity, affected systems, and what triggered the event. Illumio Core sends the structured messages using the syslog protocol to remote systems, such as Splunk and QRadar. You can set up your remote systems to automatically process the messages and alert you.

#### **Monitoring Operational Practices**

In addition to setting up an automated system, Illumio recommends implementing the following operational practices:

- **1.** Determine the normal quantity of events from the Illumio Core and monitor the trend for changes; investigate spikes or reductions in the event generation rate.
- 2. Implement good operational practices to troubleshoot and investigate alerts, and to recover from events.
- **3.** Do not monitor Illumio Core events in isolation. Monitor them as part of your overall system. Understanding the events in the context of your overall system activity can provide as much information as the events themselves.

#### **Recommended Events to Monitor**

As a best practice, Illumio recommendations you monitor the following events at a minimum.

Events	Description
Program name = Illumio_pce/sys- tem_health  Severity = Warning, Error, or Fatal	Provides multiple systems metrics, such as CPU and memory data, for each node in a PCE cluster. The PCE generates these events every minute. The Severity field is particularly important. When system metrics exceed thresholds, the severity changes to warning, error, or fatal.
	For more information about the metrics and thresholds, see the PCE Administration Guide.
	<b>Recommendation:</b> Monitor system_health messages with a severity of warning or higher and correlate the event with other operational monitoring tools to determine if administrative intervention is required.
event_type="lost_agent.found"	Contains the information necessary to identify workloads with lost agents. A lost agent occurs when the PCE deletes a workload from its database but that workload still has a VEN running on it.
	<b>Recommendation:</b> Monitor lost_agent.found events and send alerts in case you need to pair the workloads' VENs with the PCE again.
event_type="sys- tem_task.agent_missed_heart- beats_check"	Lists the VENs that missed three heartbeats (usually 15 minutes). Typically, this event precedes the PCE taking the VENs offline to perform internal maintenance.
	This event triggers an alert to be sent at 25% of the time configured in the offline timer. For example, if the offline timer is configured to 1 hour, an alert is sent after the VEN has not sent a heartbeat for 15 minutes; if the offline timer is configured to 4 hours, an alert is sent after the VEN hasn't sent a heartbeat for 1 hour.
	<b>Recommendation:</b> Monitor these events for high-value workloads because the PCE can take these workloads offline when the VENs miss 12 heartbeats (usually 60 minutes).
event_type="sys- tem_task.agent_offline_check"	Lists VENs that the PCE has marked offline, usually because they missed 12 heartbeats. The VENs on these workloads haven't communicated with the PCE for an hour and it removed the workloads from policy.
	<b>Recommendation:</b> Monitor these events for high-value workloads because they indicate change in the affected workloads' security posture.
event_type="agent.suspend"	Indicates that the VEN is suspended and no longer protecting the workload. If you did not intentionally run the VEN suspend command on the workload, this event can indicate the workload is under attack.
	<b>Recommendation:</b> Monitor these events for high-value workloads.
event_type="agent.tampering"	Indicates tampering of the workload's Illumio managed firewall and that the VEN recovered the firewall. Firewall tampering is one of the first signs that a workload is compromised. During a tampering attempt, the VEN and PCE continue to protect the workload; however, you should investigate the cause of the event.
	Recommendation: Monitor these events for high-value workloads.

Events	Description		
event_type="agent.update"	Contains the state data that the VEN regularly sends to the PCE. Typical these events contain routine information; however, the VEN can attach notice indicating the following issues:		
	<ul><li>Processes not running</li><li>Policy deployment failure</li></ul>		
	<b>Recommendation:</b> Monitor agent.update events that include notifications because they indicate workloads that might require administrative intervention.		
event_type="rule_set.create"	Contains the labels indicating the scope of a draft ruleset. Illumio Core generates these events when you create, update, or delete a draft ruleset. When you include "All Applications," "All Environments," or "All Locations" in		
event_type="rule_set.update"	a ruleset scope, the PCE represents that label type as a null HREF. Ruleset scopes that are overly broad affect a large number of workloads. Draft rulesets do not take effect until they are provisioned.		
event_type="rule_sets.delete"	rulesets do not take effect until they are provisioned.		
	<b>Recommendation:</b> Monitor these events to pinpoint ruleset scopes that are unintentionally overly broad.		
event_type="sec_rule.create"	Contains labels indicating when all workloads affected, all services, or a label/label-group are used as a rule provider or consumer. Illumio Core		
event_type="sec_rule.update"	generates these events when you create, update, or delete a draft ruleset. The removed or added labels could represent high-value applications or		
event_type="sec_rule.delete"	environments.		
	<b>Recommendation:</b> Monitor these events for high-value labels.		
event_type="sec_policy.create"	<b>[NEW in Illumio</b> Core <b>19.3.0]</b> Contains the workloads_affected field, which includes the number of workloads affected by a policy. Illumio Core generates this event when you provision draft policy that updates the policy on affected workloads. The number of affected workloads could be high or a significant percentage of your managed workloads.		
	<b>Recommendation:</b> Monitor the workloads_affected field for a high number of affect workloads. If the number exceeds an acceptable threshold, investigate the associated the policy.		
event_type="agent.clone_detec- ted"	The PCE detects cloned VENs based on clone token mismatch. This is a special alert from the Illumio Core release 19.3.2 onwards, as clones have become a higher priority. Volume of these events make the severity level important and not the fact that these events occurred.		
	<b>Recommendation:</b> If severity is 1 or 'error', some intervention may be needed.		
	NOTE Automatic Cloned VEN Remediation		
	For on-prem domain joined Windows workloads, cloned VENs support automatic clone remediation by detecting changes to the workload's domain Security identifier (SID). After the VEN reports such changes to the PCE, the PCE tells the clone to re-activate itself,		
	after which the cloned VEN is remediated and becomes a distinct agent from the original VEN.		

# **Events Setup**

This section describes PCE settings related to events and how to use them to configure PCE behavior.

# **Requirements for Events Framework**

To use the events framework, ensure that you allocate enough disk space for event data, and be familiar with the disk capacity requirements.

# **Database Sizing for Events**

Disk space for a single event is estimated at an average 1,500 bytes.



#### **CAUTION**

As the number of events increases, the increase in disk space is not a straight line. The projections below are rough estimates. Disk usage can vary in production and depends on the type of messages stored.

Number of Events	Disk Space
25 million	38GB
50 million	58GB

## **Data and Disk Capacity for Events**

For Illumio Core Cloud customers, Illumio Operations manages all data and disk capacity requirements and configuration for events; including the default events data retention period, database dumps with and without events data, and disk compacting.

For more information, contact your Illumio Support representative.

# **Events Preview Runtime Setting**

If you participated in the preview of Events in 18.1.0, the preview was enabled by configuring a setting in your PCE runtime\_env.yml file.



#### WARNING

### Remove preview parameter from runtime\_env.yml

Before you upgrade to the latest release, you must remove v2\_audita-ble\_events\_recording\_enabled: true from runtime\_env.yml. Otherwise, the upgrade does not succeed.

Removing this preview parameter does not affect the collection of "organization events" records, which continue to be recorded.

To remove the Events preview setting:

1. Edit the runtime\_env.yml file and remove the line v2\_auditable\_events\_record-ing\_enabled:

```
v2 auditable events recording enabled: true
```

If you are not participating in any other previews, you can also remove the line enable\_preview\_features.

2. Save your changes.

# **Events Settings**

The following section describes how to configure the Events Settings in the PCE web console.

# **Events Are Always Enabled**

Events are enabled by default in the PCE and cannot be disabled, in accordance with Common Criteria compliance.

Use the PCE web console to change event-related settings and the PCE runtime\_env.yml for traffic flow summaries.

## **Event Settings in PCE Web Console**

From the PCE web console, you can change the following event-related settings:

- **Event Severity:** Sets the severity level of events to record. Only messages at the set severity level and higher are recorded. The default severity is "Informational."
- **Retention Period:** The system retains event records for a specified number of days; from 1 day to 200 days with the default period being 30 days.
- **Event Pruning:** The system automatically prunes events based on disk usage and the age of events; events older than the retention period are pruned. When pruning is complete, the system\_task.prune\_old\_log\_events event is recorded.
- **Event Format:** Sets the message output to one of the three formats. The selected message output format only applies to messages that are sent over syslog to a SIEM. The REST API always returns events in JSON.
  - JavaScript Object Notation (JSON): The default; accepted by Splunk and QRadar SIEMs
  - Common Event Format (CEF): Accepted by ArcSight
  - Log Event Extended Format (LEEF): Accepted by QRadar

#### **Event Severity Levels**

Severity	Description
Emergency	System is unusable

Severity	Description
Alert	Should be corrected immediately
Critical	Critical conditions
Error	Error conditions
Warning	Might indicate that an error will occur if action is not taken
Notice	Events that are unusual, but not error conditions
Informational	Normal operational messages that require no action
Debug	Information useful to developers for debugging the application

#### **Output Format Change**

The output format can be changed in the PCE web console:

- JSON (default)
- CFF
- LEEF

Records are in JSON format until you change to one of the other formats. Then, the new events are recorded in the new format; however, the earlier events are not changed to the selected format and they remain recorded in JSON.

#### **Set Event Retention Values**

You can set the event retention values depending on the specific conditions described below.

If you are using a SIEM, such as Splunk as the primary long-term storage for events and traffic in a dynamic environment, consider setting the event retention period to 7 days. On setting it to 7 days, you can use the PCE Troubleshooting or Events Viewer to quickly troubleshoot and diagnose events. The benefit of setting 7 days is that if an issue occurs on a Friday, it can still be diagnosed on the following Monday. A large number of events are generated in a dynamic environment, which increases the data stored (disk space used), backup size, and so on. The period of 7 days provides a good balance between disk usage and the ability to troubleshoot.



# NOTE

A dynamic environment is when applications and infrastructure are subject to frequent changes; for example, usage of APIs, ETL, Containers, and so on.

If you are using a SIEM in a non-dynamic environment, consider setting the event retention period to 30 days. A smaller number of events are generated, and less disk space is used in a non-dynamic environment.

If you are not using a SIEM such as Splunk and the PCE is the primary storage for the events data used for reporting, diagnosis, and troubleshooting, set the event retention period as

per the organization's record retention policy, such as 30 days. If you generate quarterly reporting using events, set the event retention period to 90 days.

SIEM	Consideration	Value
Yes: Primary stor- age for events	If primary storage of events is not on the PCE	7 days (PCE troubleshoot- ing) 1 day (minimum)
No: Not pri- mary storage for events	If primary storage of events is on the PCE, consider the organization's record retention policy as well as the available disk and event growth pattern	30 days (default)
No	<ul> <li>If the organization's record retention is more than 30 days</li> <li>If disk monitoring is not set up, it is required to set up disk monitoring</li> </ul>	As per your record retention policy
		200 days (maximum)
Not applicable	If events data is not needed for reporting or troubleshooting	1 day (minimum)

If disk space availability and event growth projections indicate that the desired retention period cannot be safely supported, consider using a SIEM because the PCE might not store events for the desired period.




#### NOTE

Running the illumio-pce-db-management events-db command provides an output of the average number of events and the storage used.

# **Configure Events Settings in PCE Web Console**

- **1.** From the PCE web console menu, choose **Settings** > **Event Settings** to view your current settings.
- 2. Click Edit to change the settings.
  - For Event Severity, select from the following options:
    - Error
    - Warning
    - Informational
  - For Retention Period, enter the number of days you want to retain data.
  - For Event Format, select from the following options:
    - JSON
    - CEF
    - LEEF
- 3. Click Save once you're done.

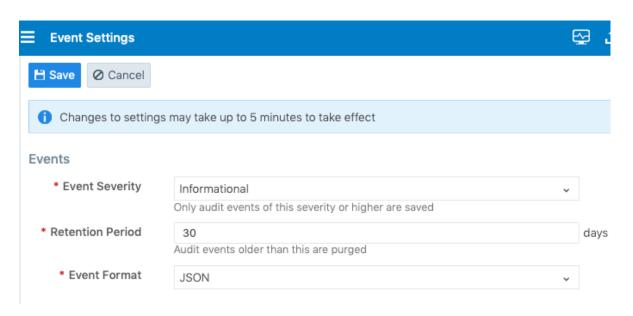

#### **Limits on Storage**

From the Illumio Core 19.3.1 release onwards, the PCE will automatically limit the maximum number of events stored. The limits are set on the volume of events stored locally in the PCE database, so that the events recorded in the database do not fill up the disk. The limit is a percentage of the disk capacity, cumulative for all services that store events on the disk.



#### **IMPORTANT**

To change the default limits, contact Illumio Support.

The configuration limit includes both hard and soft limits.

- Soft limit: 20% of disk used by event storage
   Aggressive pruning is triggered when the soft limit is reached. However, new events
   are still recorded while pruning. On the Events list page of the PCE Web Console, the
   system\_task.prune\_old\_log\_events event is displayed with the "Object creation soft
   limit exceeded" message and 'Severity: Informational'.
- Hard limit: 25% of disk used by event storage.

  More aggressive pruning is triggered when the hard limit is reached. New events are not recorded while pruning. On the Events list page of the PCE Web Console, the system\_task.prune\_old\_log\_events event is displayed with the message "Object creation hard limit exceeded" message and 'Severity: Error'. The pruning continues until the soft limit level of 20% is reached. When this occurs, a system\_task.hard\_limit\_recovery\_completed event occurs, and the PCE starts to behave as it did for the soft limit conditions.

#### **SIEM Integration for Events**

For analysis or other needs, event data can be sent using syslog to your own analytics or SIEM systems.

### **About SIEM Integration**

This guide also explains how to configure the PCE to securely transfer PCE event data in the following message formats to some associated SIEM systems:

- JavaScript Object Notation (JSON), needed for SIEM applications, such as Splunk®.
- Common Event Format (CEF), needed for SIEM applications, such as Micro Focus Arc-Sight®.
- Log Event Extended Format (LEEF), needed for SIEM applications, such as IBM QRadar®.

# **Syslog Forwarding**

The PCE can export logs to syslog. You can also use the PCE's own internal syslog configuration.

# **Identify Events in Syslog Stream**

Event records from the syslog stream are identified by the following string:

```
"version":2
AND
'"href":\s*"/orgs/[0-9]*/events' OR '"href":\s*"/system_events/'
```

## Forward Events to External Syslog Server


The PCE has an internal syslog repository, "Local" where all the events get stored. You can control and configure the relaying of syslog messages from the PCE to multiple external syslog servers.

To configure forwarding to an external syslog server:

- 1. From the PCE web console menu, choose **Settings** > **Event Settings**.
- 2. Click Add.

The Event Settings - Add Event Forwarding page opens.

3. Click Add Repository.

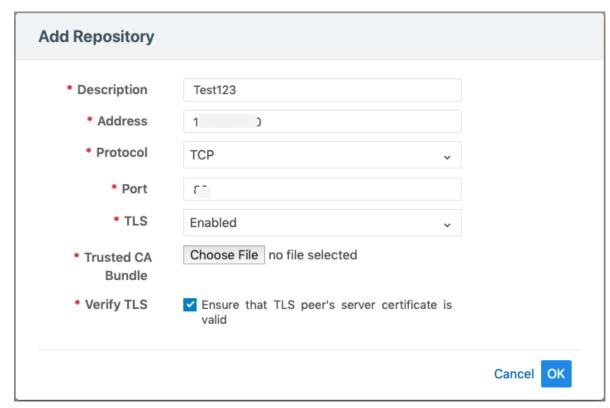

- 4. In the Add Repository dialog:
  - Description: Enter name of the syslog server.
  - Address: Enter the IP address for the syslog server.
  - Protocol: Select TCP or UDP. If you select UDP, you only need to enter the port number and click **OK** to save the configuration.
  - Port: Enter port number for the syslog server.
  - TLS: Select Disabled or Enabled. If you select Enabled, click "Choose File" and upload your organization's "Trusted CA Bundle" file from the location it is stored on.
    - The Trusted CA Bundle contains all the certificates that the PCE (internal syslog service) needs to trust the external syslog server. If you are using a self-signed certificate, that certificate is uploaded. If you are using an internal CA, the certificate of the internal CA must be uploaded as the "Trusted CA Bundle".
  - · Verify TLS: Select the check-box to ensure that the TLS peer's server certificate is valid.
- **5.** Click **OK** to save the event forwarding configuration.

After ensuring that the events are being forwarded as configured to the correct external syslog servers, you can choose to stop using the "Local" server by editing the local server setting and deselect all message types.



#### NOTE

You cannot delete the "Local" server.

## **Disable Health Check Forwarding**


PCE system health messages are useful for PCE operations and monitoring. You can choose to forward them if they are needed on the remote destination.

For example, IBM QRadar is usually used by security personnel, who might not need to monitor the PCE system health. The Illumio App for QRadar does not process the PCE system health messages.


The PCE system health messages are only provided in key/value syslog format. They are not translatable into CEF, LEEF, or JSON formats. If your SIEM does not support processing key/value messages in syslog format, do not forward system health messages to those SIEMs. For example, IBM QRadar and Micro Focus ArcSight do not automatically parse these system health messages.

To disable syslog forwarding of health check messages:

- 1. From the PCE web console menu, choose **Settings** > **Event Settings**.
- 2. Click the Event listed under the **Events** column.

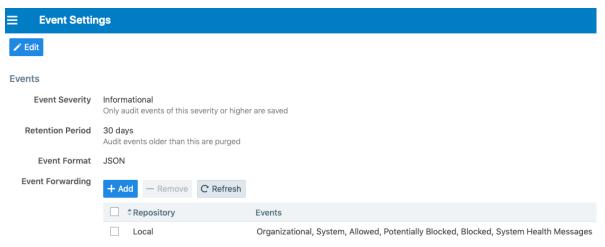

**3.** Under the Events block, for the Status Logs entry, deselect **System Health Messages**. System health check is only available in key-value format. Selecting a new event format does not change the system health check format to CEF or LEEF.

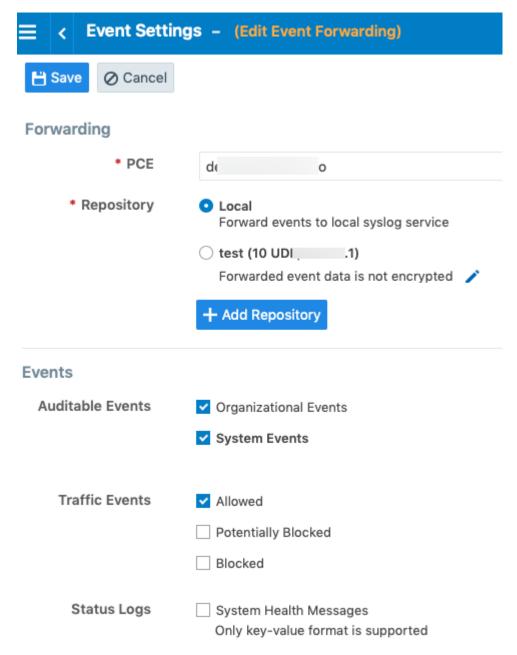

# 4. Click Save.



#### NOTE

IBM QRadar and HP ArcSight do not support system health messages. If you are using either of these for SIEM, make sure that you do not select the System Health Messages checkbox.

# **Traffic Flow Summaries**

This section describes traffic flow summaries.

After you install a VEN on a workload and pair the VEN with the PCE, the VEN monitors each workload's traffic flows and sends the traffic flow summaries to the PCE.

Traffic summaries can be exported to syslog or Fluentd. If traffic data is configured for export, the PCE processes the received traffic flow summaries from each VEN and immediately sends them to syslog or Fluentd.

# **Traffic Flow Types and Properties**

The Illumio Core logs traffic flows based on the Visibility setting. Events have attributes that can be Allowed, Blocked, or Potentially Blocked and might not appear in the traffic flow summary.

# **Visibility Settings**

The table below indicates whether or not a traffic summary is logged as Allowed, Potentially Blocked, or Blocked depending on a workload's policy state.



#### NOTE

Traffic from workloads in the "Idle" policy state is not exported to syslog from the PCE.

Visibility	Logged in Traffic Flow Summary
Off	VEN does not log traffic connection information
Blocked - Low Detail	VEN logs connection information for blocked and potentially blocked traffic only
Blocked + Allowed - High Detail	VEN logs connection information for allowed, blocked, and potentially blocked traffic
Enhanced Data Collection	VEN logs byte counts in addition to connection details for allowed, blocked, and potentially blocked traffic

# **Event Types**

In a traffic flow summary, the event type is designated by Policy Decision (pd).



#### NOTE

An asterisk ( \* ) indicates the attribute might not appear in the summary.

Event Attributes	Allowed (pd=0)	Potentially Blocked (pd=1)	Blocked (pd=2)	Unknown (pd=3)
version	✓	✓	✓	✓
count	✓	✓	✓	✓

Event Attributes	Allowed (pd=0)	Potentially Blocked (pd=1)	Blocked (pd=2)	Unknown (pd=3)
interval_sec	✓	✓	✓	✓
timestamp	✓	✓	✓	✓
dir	✓	✓	✓	✓
src_ip	✓	✓	✓	✓
dst_ip	✓	✓	✓	✓
proto	✓	✓	✓	✓
dst_prt	✓	✓	✓	✓
state	✓	✓	√	✓
pd	✓	✓	√	✓
code*	✓	✓	✓	✓
type*	✓	✓	✓	✓
dst_vulns*	✓	✓	√	✓
fqdn*	✓	✓	✓	✓
un*	✓	✓	х	✓
pn*	✓	✓	Х	✓
sn*	✓	✓	Х	✓
src_labels*	✓	✓	✓	✓
dst_labels*	✓	✓	✓	✓
src_hostname*	✓	✓	✓	✓
dst_hostname*	✓	✓	✓	✓
src_href*	✓	✓	✓	✓
dst_href*	✓	✓	✓	✓

### **Show Amount of Data Transfer**

The JSON, CEF, and LEEF for the accurate byte count work events are related to the 'Show Amount of Data Transfer' preview feature available with the Illumio Core 20.2.0 release.

The PCE now reports amount of data transferred in to and out of workloads and applications in a datacenter. The number of bytes sent by and received by the provider of an application are provided separately. These values can be seen in traffic flow summaries streamed out of the PCE. This capability can be enabled on a per-workload basis in the Workload page. It can also be enabled in the pairing profile so that workloads are directly paired into this mode.

The direction reported in flow summary is from the viewpoint of the provider of the flow:

**Destination Total Bytes Out**: Number of bytes transferred out of provider:

dst\_tbo

**Destination Total Bytes In**: Number of bytes transferred in to provider.

dst\_tbi

To activate the 'Show Amount of Data Transfer' capability on the PCE, contact your Illumio representative.

#### **LEEF Mapping**

- LEEF field x contains JSON field y
- srcBytes contains dst\_tbo
- dstBytes contains dst\_tbi
- dbi contains dst\_dbi
- dbo contains dst\_dbo

#### **CEF Mapping**

- CEF field cn2 is dst\_dbi with cn2Label is "dbi"
- CEF field cn3 is dst\_dbo with cn3Label is "dbo"
- CEF field "in" is dst\_tbi
- CEF field "out" is dst\_tbo

# Manage Traffic Flows Using REST API

You can use the following properties to manage traffic flows using the REST API.



#### NOTE

You should ignore and *not* use any extra properties that are not described in this document, such as tbi, tbo, dbi, and dbo.

Property	Description	Туре	Re- quired	Possible Values
version	The version of the flow summary schema.	Inte- ger	Yes	4

Property	Description	Туре	Re- quired	Possible Values
timestamp	Indicates the time (RFC3339) when the first flow in the summary was created, represented in UTC.  Format: yyyy-MM-dd'T'HH:mm:ss.SSSSSZ	String	Yes	
inter- val_sec	Sample duration for the flows in the summary. Default is approximately 600 seconds (10 minutes), depending on the VEN's ability to report traffic and PCE's current load.	Inte- ger	Yes	
dir	Direction of the first packet: in or out (I, O).	String	Yes	I, O
src_ip	Source IP of the flows.	String	Yes	
dst_ip	Destination IP of the flows.	String	Yes	
proto	Protocol number (0-255).	Inte- ger	Yes	Mini- mum=0
				Maxi- mum=255
type	The ICMP message type associated with the first flow in the summary. This value exists only if protocol is ICMP (1).	Inte- ger	No	Mini- mum=0
	This information is included in blocked flows for VEN versions lower than 19.1.0. It is included in all flows for VEN version 19.1.0 and later.			Maxi- mum=255
	Example: 3 for "Destination Unreachable."			
code	The ICMP message code (subtype) associated with the first flow in the summary. This value exists only if protocol is ICMP (1).	Inte- ger	No	Mini- mum=0 Maxi- mum=255
	This information is included in blocked flows for VEN versions lower than 19.1.0. It is included in all flows for VEN version 19.1.0 and later.			
	Example: 1 for "Destination host unreachable."			
dst_port	Destination port.	Inte- ger	Yes	Mini- mum=0
	This value exists only if protocol is not TCP (6) or UDP (17).			Maxi- mum=6553 5

Property	Description	Туре	Re- quired	Possible Values
pd	Policy decision value, which indicates if the flow was allowed, potentially blocked (but allowed), blocked, or unknown.	Inte- ger	Yes	Mini- mum=0
	Possible values:			Maxi- mum=3
	<ul> <li>O - Allowed traffic</li> <li>1 - Allowed traffic but will be blocked after policy enforcement</li> <li>2 - Blocked traffic</li> <li>3 - Unknown</li> </ul>			
	NOTE Policy decision is "unknown" in the following cases:			
	<ul> <li>Flows uploaded using existing bulk API (/orgs/<org_id>/ agents/bulk_traffic_flows).</org_id></li> <li>Flows uploaded using Network Flow Ingest Application (/orgs/<org_id>/traffic_data).</org_id></li> <li>Traffic reported by idle VENs and specifically those that have been reported with "s" state (snapshot).</li> </ul>			
count	Count of the number of flows in the flow summary.	Inte- ger	Yes	
state	Session state for the traffic flows in the flow summaries.	String	No	A, C, T, S, N
	Possible values:			
	<ul> <li>Active (A): Connection was still open at the time the flow summary was logged. Applies to allowed and po- tentially blocked flows.</li> </ul>			
	Closed (C): (Linux only) Connection closed at the time the flow summary was logged. Applies to allowed and potentially blocked flows.  Time depth (T): (C): (S): (S): (S): (S): (S): (S): (S): (S			
	<ul> <li>Timed out (T): Connection timed out at the time the flow summary was logged. Applies to allowed and po- tentially blocked flows. Due to a limitation of WFP, a Windows VEN will report "T" even when the connection is closed at the time the flow summary was logged.</li> </ul>			
	<ul> <li>Snapshot (S): Snapshot of current connections to and from the VEN, which applies only to workloads whose policy state is set to Idle. Applies to allowed and poten- tially blocked flows.</li> </ul>			
	<ul> <li>New connection (N): Dropped TCP packet contains a SYN and is associated with a new connection. Applies to blocked TCP flows. The value is empty for blocked UDP flows.</li> </ul>			

Property	Description	Type	Re- quired	Possible Values
pn	The program name is associated with the first flow of the summary. It is supported on inbound flows for Linux and Windows VEN and on outbound flows for only Windows VEN.	String	No	
	This information might not be available on short-lived processes, which are Linux-specific.			
	Currently, flows are aggregated, so this value might represent only the first process detected across all aggregated flows.			
	If network communication is done by an OS component (or a driver), no process is associated with it.			
un	The username is associated with the first flow of the summary. It is supported on inbound flows for Linux and Windows VEN and on outbound flows for only Linux VEN.	String	No	
	On Windows, it can include the username of the user account that initiated the connection.			
	This information might not be available on short-lived processes.			
sn	Service name associated with the first flow in the summary. It is supported only on inbound flows on Windows VEN.	String	No	
src_host- name	Hostname of the source workload that reported the flow.	String	No	
src_href	HREF of the source workload that reported the flow.	String	No	
src_la- bels	Labels applied to the source workload.	Object	No	
	The src_hostname, src_href, and src_labels values are not be included in a traffic summary if the source of the flow is not an Illumio-labeled workload. For example, Internet traffic or a managed workload without any labels applied.			

Property	Description	Туре	Re- quired	Possible Values
dst_host- name	Hostname of the destination workload that reported the flow.	String	No	
dst_href	HREF of the destination workload that reported the flow.	String	No	
dst_la- bels	Labels applied to the destination workload.	Object	No	
	The dst_hostname, dst_href, and dst_labels values are not be included in a traffic summary if the destination of the flow is not an Illumio-labeled workload. For example, Internet traffic or a managed workload without any labels applied.			
dst_vulns	Information about the vulnerabilities on the destination of the traffic flow with the specific port and protocol.	Object	No	
	<ul> <li>Vulnerabilities are defined by Common Vulnerabilities and Exposures (CVE), with identifiers and descriptive names from the U.S. Department of Homeland Security National Cybersecurity Center.</li> <li>The vulnerability information is sent only when the Vulnerability Maps feature is turned on via a license and the information is imported into the PCE from a Vulnerability Scanner, such as Qualys.</li> </ul>			
fqdn	Fully qualified domain name	String	No	

The following table describes the sub-properties for the dst\_vulns property:

Sub-proper- ty	Description	Type	Required
count	The total number of existing vulnerabilities on the destination port and protocol.	Integer	No
max_score	The maximum of all the scores for the vulnerabilities on the destination port and protocol.	Number	No
cve_ids	The list of CVE-IDs associated with the vulnerabilities that have the maximum score. Up to 100 displayed .	Array	No

# **Export Traffic Flow Summaries**

Decide where to export the traffic flow summaries: syslog or Fluentd.



#### CAUTION

By default, from the 19.3.0 release on, the PCE generates all traffic flow summaries and sends them to syslog.

If you have not configured syslog, the syslog data by default is written to a local disk. For example, it is written to /var/log/messages.

# **Export to Syslog**

To configure and export the traffic flow summaries to a remote syslog, follow these steps:

- **1.** From the PCE web console menu, choose **Settings** > **Event Settings**.
- 2. Enable a remote syslog destination.
- **3.** Select specific traffic flow summaries to be sent to remote syslog. This filters the selected traffic flow summaries and send those to the remote syslog.

To prevent the syslog data from being written to a local disk based on your preference, deselect the Events checkboxes on the **Settings** > **Event Settings** > Local page in the PCE web console. For more information, see Events Settings. [294]



#### NOTE

The generation of all traffic flow summaries is implemented to ensure that all of the traffic flow summaries are controlled from the PCE web console only.

This example shows the runtime\_env.yml configuration to generate all types of flow summaries.

Export to Syslog

export\_flow\_summaries\_to\_syslog:

- accepted
- potentially\_blocked
- blocked

This example shows the runtime\_env.yml configuration if you do not want to generate any types of flow summaries.

Export to Syslog

export\_flow\_summaries\_to\_syslog:
- none



#### NOTE

Illumio does not currently support having a primary and secondary syslog configuration, with disaster recovery and failover.

You can configure it on a system syslog (local) and use the internal syslog configuration to send messages to local, which sends to system syslog.

# **Export to Fluentd**

To generate and export the traffic flow summaries to Fluentd, follow these steps:

- 1. Set the export\_flow\_summaries\_to\_fluentd parameter in runtime\_env.yml.
- 2. Set the external\_fluentd\_aggregator\_servers parameter in runtime\_env.yml.

This example shows the runtime\_env.yml configuration to generate two types of flow summaries, out of the three possible types.

Export to Fluentd

external\_fluentd\_aggregator\_servers:
- fluentd-server.domain.com:24224
export\_flow\_summaries\_to\_fluentd:
- accepted
- blocked

#### Flow Duration Attributes

The 20.2.0 VEN sends two new attributes to the syslog and fluentd output. The new attributes describe the flow duration and are appended to the flow data.

- **Delta flow duration in milliseconds** (ddms): The duration of the aggregate within the current sampling interval. This field enables you to calculate the bandwidth between two applications in a given sampling interval. The formula is dbo (delta bytes out) / delta\_duration\_ms, or dbi / delta\_duration\_ms.
- Total flow duration in milliseconds (tdms): The duration of the aggregate across all sampling intervals. This field enables you to calculate the average bandwidth of a connection between two applications. The formula is tbo (total bytes out) / total\_duration\_ms, or tbo / total\_duration\_ms. It also enables you to calculate the average volume of data in a connection between two applications. The formula is tbo (total bytes out) / count (number of flows in an aggregate), or tbi / count.

# **Traffic Flow Summary Examples**

The following topic provides examples of traffic flow summaries in JSON, CEF, and LEEF, and messages that appear in syslog.

#### **JSON**

```
"interval_sec": 600,
"count": 1,
"tbi": 73,
"tbo": 0,
"pn": "example-daemon",
"un": "example",
"src_ip": "xxx.xxx.xx.xxx",
"dst_ip": "xxx.x.x.xxx",
"timestamp": "2018-05-23T16:07:12-07:00",
"dir": "I",
"proto": 17,
"dst_port": 5353,
"state": "T",
"src_labels": {
 "app": "AppLabel",
  "env": "Development",
 "loc": "Cloud",
 "role": "Web"
},
"src_hostname": "test-ubuntu-3",
"src_href": "/orgs/1/workloads/xxxxxxxx-7741-4f71-899b-d6f495326b3f",
"dst_labels": {
 "app": "AppLabel",
 "env": "Development",
  "loc": "AppLocation",
 "role": "Database"
"dst_hostname": "test-ubuntu-2",
"dst_href": "/orgs/1/workloads/xxxxxxxx-012d-4651-b181-c6f2b269889e",
"pd": 1,
"dst vulns": {
 "count": 8,
 "max_score": 8.5,
 "cve ids": [
   "CVE-2016-2181",
   "CVE-2017-2241"
 1
"fqdn" : "xxx.ubuntu.com",
"version": 4
```

### **Syslog**

```
2019-02-11T22:50:15.587390+00:00 level=info host=detest01 ip=100.1.0.1 program=illumio_pce/collector | sec=925415.586 sev=INFO pid=9944 tid=30003240 rid=bb8ff798-1ef2-44b1-b74e-f13b89995520 {"interval_sec":1074, "count":1,"tbi":3608, "tbo":0,"pn":"company-daemon","un":"company","src_ip":"10.0.2.15", "dst_ip":"211.0.0.232", "class":"M","timestamp":"2019-02-11T14:48:09-08:00","dir":"I", "proto":17,
```

```
"dst_port":5353, "state":"T", "src_labels": { "app": "AppName",
    "env": "Development", "loc": "Cloud", "role": "Web" },
    "src_hostname": "dev-ubuntu-1",
    "src_href": "/orgs/1/workloads/773f3e81-5779-4753-b879-35a1abe45838",
    "dst_labels": { "app": "AppName", "env": "Development", "loc": "Cloud2",
    "role": "Web" },
    "dst_hostname": "dev-ubuntu-1", "dst_href": "/orgs/1/workloads/
773f3e81-5779-4753-b879-35a1abe45838", "pd":0, "dst_vulns": { "count":1,
    "max_score":3.7,
    "cve_ids": [ "CVE-2013-2566", "CVE-2015-2808"] }, "fqdn": "xxx.ubuntu.com",
    "version":4}
```

#### Allowed Flow Summary (pd = 0)

```
2016-01-12T05:23:30+00:00 level=info host=myhost ip=127.0.0.1 program=illumio_pce/ collector | sec=576210.952 sev=INFO pid=25386 tid=16135120 rid=0 { "interval_sec":1244, "count":3, "dbi":180, "dbo":180, "pn":"sshd", "un":"root", "src_ip":"10.6.0.129", "dst_ip":"10.6.0.129", "timestamp":"2017-08-16T13:23:57-07:00", "dir":"I", "proto":6, "dst_port":22, "state":"A", "dst_labels": { "app":"test_app_1", "env": "test_env_1", "loc":"test_place_1", "role":"test_access_1" }, "dst_hostname":"corp-vm-2", "dst_href":"/orgs/1/workloads/5ddcc33b-b6a4-4a15-b600-64f433e4ab33", "pd":0, "version":4 }
```

## Potentially Blocked Flow Summary (pd = 1)

```
2016-01-12T05:29:21+00:00 level=info host=myhost ip=127.0.0.1
program=illumio_pce/
collector| sec=576561.327 sev=INFO pid=25386 tid=16135120 rid=0
sec=920149.541
sev=INFO pid=1372 tid=30276700 rid=136019d0-f9d8-45f3-ac99-f43dd8015675
{"interval_sec":600,"count":1,"tbi":229,"tbo":0,"src_ip":"172.16.40.5",
"dst_ip":"172.16.40.255","timestamp":"2017-08-16T14:45:58-07:00","dir":"I",
"proto":17,"dst_port":138,"state":"T","dst_labels":{"app":"test_app_1",
"env":"test_env_1","loc":"test_place_1","role":"test_access_1"},"dst_hostnam
e":
"corp-vm-2","dst_href":"/orgs/1/workloads/5ddcc33b-b6a4-4a15-b600-64f433e4ab33",
"pd":1,"version":4}
```

#### Blocked Flow Summary (pd = 2)

```
2016-01-12T05:23:30+00:00 level=info host=myhost ip=127.0.0.1

program=illumio_pce/

collector | sec=576210.831 sev=INFO pid=25386 tid=16135120 rid=0

sec=915000.311

sev=INFO pid=1372 tid=30302280 rid=90a01be5-a3c1-44f9-84fd-3c3a5eaec1f8

{"interval_sec":589,"count":1,"src_ip":"10.6.1.89","dst_ip":"10.6.255.255",
"timestamp":"2017-08-16T13:22:09-07:00","dir":"I","proto":17,"dst_port":138,
"dst_labels":{"app":"test_app_1","env":"test_env_1","loc":"test_place_1",
"role":"test_access_1"},"dst_hostname":"corp-vm-1","dst_href":"/orgs/1/
workloads/
a83ba658-576b-4946-800a-b39ba2a2e81a","pd":2,"version":4}
```

#### **Unknown Flow Summary (pd = 3)**

```
2019-06-14T05:33:45.442561+00:00 level=info host=devtest0 ip=127.0.0.1 program=illumio_pce/collector | sec=490425.442 sev=INFO pid=12381 tid=32524120 rid=6ef5a6ac-8a9c-4f46-9180-c0c91ef94759 { "dst_port":1022, "proto":6, "count":20, "interval_sec":600, "timestamp":"2019-06-06T21:03:57Z", "src_ip":"10.23.2.7", "dst_ip":"10.0.2.15", "dir":"O", "state":"S", "pd":3, "src_href":"/orgs/1/workloads/a0d735ce-c55f-4a38-965f-bf6e98173598", "dst_hostname":"workload1", "dst_href":"/orgs/1/workloads/a20eb1b5-10a4-419e-b216-8b35c795a01e", "src_labels": { "app":"app", "env":"Development", "loc":"Amazon", "role":"Load Balancer" } , "version":4 }
```

#### **CEF**

```
CEF:0|Illumio|PCE|2015.9.0|flow_potentially_blocked|Flow Potentially Blocked|3|
act=potentially_blocked cat=flow_summary deviceDirection=0 dpt=137
src=someIPaddress
dst=someIPaddress proto=udp cnt=1 in=1638 out=0 rt=Jun 14 2018 01:50:14
cn1=120 cn1Label=interval_sec cs2=T cs2Label=state cs6=/orgs/1/workloads/
someID cs6Label=dst_href
cs4={"app":"CRM","env":"Development","loc":"AppLocation",
"role":"Web"} cs4Label=dst_labels dhost=connectivity-check.someDomainName
cs1={"count":1,"max_score":3.7,"cve_ids":
["CVE-2013-2566","CVE-2015-2808"]}
cs1Label=dst_vulns dvchost=someDomainName
```

#### Unknown Flow Summary (pd = 3)

```
2019-06-14T21:02:55.146101+00:00 level=info host=devtest0 ip=127.0.0.1 program=illumio_pce/collector| sec=546175.145 sev=INFO pid=15416 tid=40627440 rid=f051856d-b9ee-4ac8-85ea-4cb857eefa82 CEF:0|Illumio|PCE|19.3.0| flow_unknown| Flow Unknown|1|act=unknown cat=flow_summary deviceDirection=0 dpt=22 src=10.0.2.2 dst=10.0.2.15 proto=tcp cnt=6 in=6 out=6 rt=Jun 14 2019 21:02:25 duser=root dproc=sshd cn1=31 cn1Label=interval_sec cs2=S cs2Label=state dhost=workload1 cs6=/orgs/1/workloads/a20eb1b5-10a4-419e-b216-8b35c795a01e cs6Label=dst_href dvchost=devtest0.ilabs.io msg= {"trafclass_code":"U"}
```

#### LEEF

```
LEEF: 2.0 | Illumio | PCE | 2015.9.0 | flow_blocked | cat=flow_summary devTime=2018-06-14T10:38:53-07:00 devTimeFormat=yyyy-MM-dd'T'HH:mm:ssX proto=udp sev=5 src=someIPaddress dst=someIPaddress dstPort=5353 count=15 dir=I intervalSec=56728 dstHostname=someHostName dstHref=/orgs/1/workloads/someID
```

```
dstLabels={"app":"CRM","env":"Development","loc":"Cloud","role":"Web"}
dstVulns={"count":2,"max_score":3.7} dstFqdn=someDomainName "cve_ids":
["CVE-2013-2566","CVE-2015-2808"]}
```

#### Unknown Flow Summary (pd = 3)

```
2019-06-14T19:25:53.524103+00:00 level=info host=devtest0 ip=127.0.0.1 program=illumio_pce/collector| sec=540353.474 sev=INFO pid=9960 tid=36072680 rid=49626dfa-d539-4cff-8999-1540df1a1f61 LEEF:2.0|Illumio|PCE|19.3.0| flow_unknown|cat=flow_summary devTime=2019-06-06T21:03:57Z devTimeFormat=yyyy-MM-dd'T'HH:mm:ssX proto=tcp sev=1 src=10.23.2.7 dst=10.0.2.15 dstPort=1022 count=20 dir=0 intervalSec=600 state=S srcHref=/orgs/1/workloads/a0d735ce-c55f-4a38-965f-bf6e98173598 srcLabels= {"app":"app","env":"Staging","loc":"Azure","role":"API"} dstHostname=workload1 dstHref=/orgs/1/workloads/a20eb1b5-10a4-419e-b216-8b35c795a01e
```

# Illumio Core PCE CLI Tool Guide 1.4.2

# Overview of the CLI Tool

This topic provides an overview of the CLI Tool, describes the general syntax of the CLI Tool command, and lists the environment variables you can use to customize the CLI Tool.



#### **IMPORTANT**

See the *Illumio Core CLI Tool 1.4.0 Release Notes* and *Illumio Core CLI Tool 1.4.1 Release Notes* and *Illumio CORE CLI Tool 1.4.2* Release Notes in your respective Illumio Core Technical Documentation portal for the updates to the CLI Tool for these releases.

### **About This Guide**

The following sections provide useful information to help you get the most out of this guide.

# **CLI Tool Versioning**

Illumio Core CLI Tool version 1.4.2 is compatible with Illumio Core PCE versions:

PCE 19.3.6-H2 (LTS)

PCE 21.2.4 (LTS)

PCE 21.5.20 (LTS)

PCE 22.1.1 (Standard)

PCE 22.2.0 (Standard)

The CLI Tool version numbering is independent from the release and version numbering of Illumio Core PCE and VEN. The CLI Tool works with multiple versions of the PCE and the VEN and does not necessarily need software changes in parallel with releases of the PCE or the VEN.



#### **IMPORTANT**

See the *Illumio Core CLI Tool 1.4.0 Release Notes, Illumio Core CLI Tool 1.4.1 Release Notes* and *Illumio Core CLI Tool 1.4.2 Release Notes* in your respective Illumio Core Technical Documentation portal for the updates to the CLI Tool for these releases.

#### **How to Use This Guide**

This guide includes several major sections:

- Overview to the CLI Tool
- Installation
- Formal syntax of the ilo command
- Tutorials for various operations
- · Uploading vulnerability data
- · Security policy import and export

# **Before Reading This Guide**

Before performing the procedures in this guide, be familiar with the following information:

- The CLI Tool interacts with the PCE; therefore, be familiar with PCE concepts such as core and data nodes, workloads, and traffic. See the PCE Administration Guide.
- The CLI Tool is often used to upload vulnerability data; therefore, understand how vulnerability data is used in the PCE web console. See the "Vulnerability Maps" topic in Visualization Guide.
- The CLI Tool can be used with workload data; therefore, you must understand what workloads are. See the "VEN Architecture and Components" topic in the VEN Administration Guide.
- The CLI Tool can be used with security policy rules, rulesets, labels, and similar resources; therefore, be familiar with these concepts. See "The Illumio Policy Model" in the Security Policy Guide.


#### **Notational Conventions in This Guide**

- Newly introduced terminology is italicized. Example: *activation code* (also known as pairing key)
- Command-line examples are monospace. Example: illumio-ven-ctl --activate
- Arguments on command lines are monospace italics. Example: illumio-ven-ctl --activate activation code
- In some examples, the output might be shown across several lines but is actually on one single line.
- Command input or output lines not essential to an example are sometimes omitted, as indicated by three periods in a row. Example:

```
... some command or command output ...
```

# **CLI Tool and PCE Resource Management**

With the Illumio CLI Tool, you can manage many of your PCE's resources directly from your local computer.

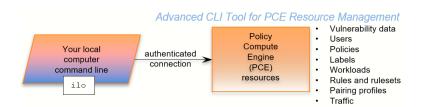

Some purposes of the CLI Tool include the following capabilities:

- Import vulnerability data for analysis with Illumination.
- Help with tasks such as directly importing workload information to create workloads in bulk.
- Create, view, and manage your organization's security policy rules, rulesets, labels, and other resources.



#### **CAUTION**

The CLI Tool is a powerful way to work with your PCE resources. Exercise caution to make sure that your use of the tool does not adversely affect your system. If possible, test your CLI Tool commands against a non-production system before using them on your production PCEs.

The CLI Tool is named ilo. It is a wrapper around the Illumio Core REST API. No knowledge of the REST API is required.

### The ilo Command

This section describes the general syntax of the CLI Tool command, ilo, and tells how to use command-line help to get more specific syntax information.

### **Formal Syntax**

The formal syntax for the ilo command is as follows:

ilo resource\_or\_specialCommand argument options

Where:

• resource\_or\_specialCommand represents either a resource managed by the PCE or a command that is not related to a particular resource.

A resource is an object that the PCE manages, such as a workload, label, or pairing profile. Example resource command on Linux (create a workload):

ilo workload create --name FriendlyWorkloadName --hostname
myWorkload.BigCo.com

A special command is a command that is not related to a specific resource. Special commands include user, login, use\_api\_key, and node\_available.

Example special command on Windows (log out of PCE):

ilo user logout --id 6

- The argument represents an operation on the resource or special command.
- The options are allowed options for the resource\_or\_specialCommand. The specific option depends on the type of resource or special command.

## **CLI Tool Help**

To get a complete list of all the available CLI Tool commands, use the ilo command without options. This command displays the high-level syntax of special commands, resources, and their allowable options.

For details about a resource's or special command's arguments, specify the name of the resource followed by the argument followed by the --help option. For example:

```
ilo workload create --help
```

# **HTTP Response Codes and Error Messages**

This section describes the response codes and error messages that can be returned when you use CLI Tool commands.

## **REST API HTTP Response Codes**

At the end of its output, the ilo command displays the REST API HTTP response code from the command. For example, a successful operation shows the following output:

```
...
200, OK
```

## **Error Messages**

For many syntactical or other types of errors, the CLI Tool displays a general message encouraging you to verify your syntax with the CLI Tool help:

```
The ilo command has encountered an error. Check your syntax with either of the following commands:

- ilo
- ilo <command> --help
```

In addition, in some circumstances, the CLI Tool writes a detailed log of errors:

```
For detailed error messages, see the file:
location-of-local-temp-directory/illumio-cli-error.log
```

Where location-of-local-temp-directory is as follows:

- Linux: /tmp
- Windows: C:\Windows\Temp

# **Environment Variables**

Illumio provides Linux environment variables to allow users to customize operation of the CLI tool.

Environment Variable	Purpose
ILO_API_KEY_ID	API key for non-password based authentication and cookie less session with PCE. See "Authenticate with an API Key".
ILO_API_KEY_SECRET	API key secret for non-password based authentication and cookie less session with PCE. See "Authenticate with an API Key".
ILO_API_VERSION	API version to be used to execute CLI commands. Set this if you want to override the default API version. See "Set the Illumio ASP REST API Version." Default: v2. Example: \$ export ILO_API_VERSION=v1
ILO_CA_DIR	Directory that contains certificates. See "TLS/SSL Certificate for Access to the PCE".
ILO_CA_FILE	Absolute path to certificate file. See "TLS/SSL Certificate for Access to the PCE".
ILO_DISPLAY_CONFIG	Absolute path to the display configuration file that is to be used with the list command. See "Linux Save Specific Fields to File For Reuse".
ILO_INSECURE_PASS- WORD	Provide a password for login. If this variable is set, the login password prompt does not appear, and this password is used instead. Do not use in a production system when authentication security is desired.
	Example: \$ export ILO_INSECURE_PASSWORD=myInsecurePassword
ILO_KERBEROS_SPN	Kerberos service principal name (SPN). Specify this variable when using Kerberos authentication.
ILO_LOGIN_SERVER	PCE login server FQDN. Use this variable when the login server FQDN is not the same as the PCE FQDN. See "Explicit Log into the PCE".
ILO_ORG_ID	Organization identifier for certificate-authenticated session with PCE. Value is always 1. Does not need to be explicitly set The environment variable is set by the system and should not be explicitly set. See "Authentication to PCE with API Key or Explicit Login".
ILO_PCE_VERSION	PCE version for the CLI to use. Default: 19.1.0
	Example: \$ export ILO_PCE_VERSION=18.2.5
ILO_PREVIEW	Enable any preview features that are included in this release. To disable preview features, remove this variable from the environment.
ILO_SERVER	FQDN of PCE for login and authentication with PCE. See "Authentication to PCE with API Key or Explicit Login".
TSC_ACCESS_KEY	These two ENV variables have been added in the release 1.4.2 to set up the Tenable SC API keys, which are used for authentication.
TSC_SECRET_KEY	
TSC_HOST	Variable that specifies the target host for Tenable
QAP_HOST	Variable that specifies the target host for Qualys

# **Installation and Authentication**

This section describes how to install the CLI Tool. It also describes how to set up authentication, how to upgrade the tool, and how to uninstall it.

## **Installation Prerequisites**

This section details prerequisites and the installation of the CLI Tool. Be sure you meet the prerequisites in the checklist.

# **Prerequisite Checklist**

License for vulnerability data upload
Vulnerability data for upload
Functional PCE
Supported operating systems
TLS/SSL certificate for authenticating to the PCE
API version set in configuration
The CLI Tool installation program

# **License for Vulnerability Data**

The Illumio Core Vulnerability Maps license is required to import vulnerability data into the Illumio PCE. For information about obtaining a license, contact Illumio Customer Support. For information on activating the license, see Add the License for Vulnerability Data Upload [334].

## **Upload Vulnerability Data**

When you plan on using the CLI Tool to upload vulnerability data, make sure you have the data to upload in advance. See Supported Vulnerability Data Sources [337] for information.

#### **Install Functional PCE**

Because the CLI Tool is for managing resources on your PCE, you need to have already installed a fully functional PCE.

### **Supported Computer Operating Systems**

The CLI Tool is supported on the following operating systems.

#### Linux

- Ubuntu 18.04
- Ubuntu 20.04
- Centos/RHEL 7.9
- Centos/RHEL 8.4

Microsoft Windows



#### NOTE

The CLI Tool is not supported on Windows 32-bit CPU architecture. Ensure that you run it on Windows 64-bit CPU architecture.

- Windows 2012 64 bit
- Windows 2016 64 bit
- · Windows 10 64 bit



#### NOTE

CLI 1.4.2 is no longer supported on Windows 2008 R2 (EOL). The CLI Tool should work and can be used at your own risk.

# TLS/SSL Certificate for Access to the PCE

You need a TLS/SSL certificate to securely connect to the PCE. Requirements for this certificate are provided in the PCE Installation and Upgrade Guide.

# **Alternative Trusted Certificate Store**

To secure the connection to the PCE, by default, the CLI Tool relies on your computer's trusted certificate store to verify the PCE's TLS certificate. You can specify a different trusted store. When you have installed a self-signed certificate on the PCE, the alternative trusted store might be necessary.

Example: Set envar for alternative trusted certificate store z

export ILO\_CA\_FILE=~/self-signed-cert.pem

#### Set the Illumio Core REST API Version

The CLI Tool uses v2 of the Illumio Core REST API by default.

### Install, Upgrade, and Uninstall the CLI Tool

This section explains how to install, upgrade, or uninstall the CLI Tool on Linux or Windows.

### **Download the Installation Package**

Download the CLI Tool installation package from the Tools Catalog page (login required) to a convenient location on your local computer.

# **Install Linux CLI Tool**

The CLI Tool installer for Linux is delivered as an RPM for RedHat/CentOS and DEB for Debian/Ubuntu.

The CLI Tool is installed in the local binaries directory /usr/local/bin.

Log into your local Linux computer as a normal user and then use sudo to run one of the following commands.

RedHat/CentOS:

\$ sudo rpm -ivh /path\_to/nameOfCliRpmFile.rpm

Debian/Ubuntu:

\$ sudo dpkg -i / path\_to / nameOfCliDebFile .deb

## **Upgrade Linux CLI Tool**

Log into your local Linux computer as a normal user and then use sudo to run one of the following commands.

RedHat/CentOS:

\$ sudo rpm -Uvh /path\_to/nameOfCliRpmFile.rpm

Debian/Ubuntu:

\$ sudo dpkg -i / path\_to / nameOfCliDebFile .deb

The same option, -i, is used for installation or upgrade.

#### **Uninstall Linux CLI Tool**

Log into your local Linux computer as a normal user and then use sudo to run one of the following commands.

RedHat/CentOS:

\$ sudo rpm -e nameOfCliRpmFile

Debian/Ubuntu:

\$ sudo dpkg -r nameOfCliDebFile

#### **Install Windows CLI Tool**

The CLI Tool installer for Windows is delivered as an .exe file.

Log into your local Windows computer as administrator and start the installation program in any of the following ways.

- In the Windows GUI, double-click the .exe file.
- In a cmd window, run the .exe.
- In a PowerShell window, run the .exe.

After starting the installation program, follow the leading prompts.

A successful installation ends with the "Installation Successfully Completed" message and the help text for the CLI Tool is displayed.

# **Upgrade Windows CLI Tool**

The CLI Tool cannot be directly upgraded from an existing CLI Tool installation.

If you have already installed a previous version of the CLI Tool, manually uninstall it with the Windows Control Panel's Add/Remove Programs.

After uninstalling the previous version of the CLI Tool, install the new version of the CLI Tool as described in Install Windows CLI Tool [322].

#### **Uninstall Windows CLI Tool**

Log into your local Windows computer as an administrator, and from the Windows Control Panel, launch Add/Remove Programs.

Select Illumio CLI from the list and click the Uninstall button.

### Authenticate with the PCE

When using the CLI Tool, you can authenticate to your PCE in the following ways:

#### · With an API key and key secret:

This is the easiest way. Before you create the API key and secret, you need to log in to authenticate to the PCE. After creating and using the key, you do not have to specify your username and password again.

### · With the explicit command to log in:

This always requires a username and password.

This method also requires you to log out with a user ID displayed at login. The explicit login times out after ten minutes of inactivity, after which you must log in again.

For both authentication mechanisms, on the command line, you always need to specify the FQDN and port of your PCE. The default port for the PCE is 8443. However, your system administrator can change this default. Check with your system administrator to verify the port you need.

# Authenticate with an API Key

To authenticate to the PCE with an API key, you must first explicitly log into the PCE, create the API key, and then use the key to authenticate.

1. Authenticate via explicit login:

ilo login --server yourPCEfqdn:itsPort

2. Create the API key:

ilo api\_key create --name someLabel

someLabel is an identifier for the key.

3. Use the API key to authenticate:

ilo use\_api\_key --server yourOwnPCEandPort --key-id yourOwnKeyId --orgid --key-secret yourOwnKeySecret

# Create an API Key

On Linux, for later ease of use, with the api\_key --create-env-output option, you can store the API key, API secret, and the PCE server name and port as environment variables in a file that you source in future Linux sessions.

Linux Example

This example creates the API key and secret and stores them as environment variables in a file named ilo\_key\_MY\_SESSION\_KEY.

```
# ilo api_key create --name MY_SESSION_KEY --create-env-output
# Created file ilo_key_MY_SESSION_KEY with the following contents:

export ILO_API_KEY_ID=14ea453b6f8b4d509
export ILO_API_KEY_SECRET=elfa1262461ca2859fcf9d91a0546478d10a1bcc4c579d888
a4e1cace71f9787
export ILO_SERVER=myPCE.BigCo.com:8443
export ILO_ORG_ID=1

# To export these variables:
# $ source ilo_key_MY_SESSION_KEY
```

## Log Into the PCE

Without an API key, you must explicitly log into the PCE.

For on-premises PCE deployments, the login syntax is the FQDN and port of the PCE:

```
ilo login --server yourPCEfqdn:itsPort
```

For yourPCEfqdn:itsPort, do not specify a URL instead of the PCE's FQDN and port. If you do, an error message is displayed.

For the Illumio Secure Cloud customers, the login syntax is:

```
ilo login --server URL_or_bare_PCEfqdn:itsPort --login-server login.illum.io:443
```

See the explanation above about the argument to the --server option.

- After login, the output of the command shows a user ID value. Make a note of this value. You need it when you log out.
- The session with the PCE remains in effect as long as you keep using the CLI Tool. After 10 minutes of inactivity, the session times out, and you must log in again.

Example

In this example, the user ID is 6.

```
C:\Users\marie.curie> ilo login --server myPCE.BigCo.com:8443
Enter User Name: albert.einstein@BigCo.com
```

```
Enter Password: Welcome Albert!
User ID = 6
Last Login Time 2018-08-10T-09:58:07.000Z from someIPaddress
Access to Orgs:
Albert: (2)
Roles: [3]
Capabilities: {"basic"=>["read", "write"], "org_user_roles"=>["read", "write"]}
User Time Zone: America/Los_Angeles
Server Time: 2018-08-12T17:58:07.522Z
Product Version: 16.09.0-1635
Internal Version: 48.0.0-255d6983962db54dc7ca627534b9f24b94429bd5
Fri Aug 6 16:11:50 2018 -0800
Done
```

## Log Out of the PCE

To end a session with the PCE, use the following command:

```
ilo user logout --id valueOfUserIdFromLogin
```

Where:

• valueOfUserIdFromLogin is the user ID from your login. See Log Into the PCE [324] for information.

Example

In this example, the user ID is 6.

```
ilo user logout --id 6
```

## **CLI Tool Commands for Resources**

This section describes how to use the CLI Tool with various PCE resources.

#### View Workload Rules

You can view a specific workload's rules with the following command:

```
ilo workload rule_view --workload-id UUID
```

Where:

• UUID is the workload's UUID. See About the Workload UUID [330] for information.

In the example below, the workload's UUID is as follows:

```
2ca0715a-b7e3-40e3-ade0-79f2c7adced0
```

Example View Workload Rules

## **View Report of Workload Services or Processes**

The following command lists all running services or processes on a workload:

```
ilo workload service_reports_latest --workload-id UUID
```

Where:

UUID is the workload's UUID. See About the Workload UUID [330].

In the example, the workload's UUID is as follows:

```
2ca0715a-b7e3-40e3-ade0-79f2c7adced0
```

Example Workload Service Report

# **View Host and System Inventory**

You can use the following commands to get a quick source of information for troubleshooting or when working with Illumio Customer Support. Using these commands is a quicker and less detailed alternative to running a PCE support report.

To show host inventory for the "local" node:

```
$ illumio-pce-env show host-inventory
```

To show system inventory for the PCE:

```
$ illumio-pce-env show system-inventory
```

To show host inventory for all PCE nodes and also the PCE system inventory:

```
$ illumio-pce-env show inventory
```

## Use the list Option for Resources

Many resources take the list option. This section details some of its uses.

## **Default List of All Fields**

The default list command displays all fields associated with the resource:

```
ilo resource list
```

## **List Only Specific Fields**

With the --field option, specify the fields to display:

```
ilo resource list --field CSV_list_of_fieldnames
```

For example, to display a list of labels with only the href, key, and value fields, use the --field option with those fields as comma-separated arguments.

Example List with Selected Fields

## **Nested Resource Fields and Wildcards**

Some resources have hierarchical, nested fields. For example, the workload resource includes the following hierarchy for the agent field:

agent/config/log\_traffic

- · A field named agent
  - That has a field named config
    - That has a field named log\_traffic

To list nested fields, separate the hierarchy of the field names with a slash to the depth of the desired field.

To see all nested fields of one of a resource's fields, use the asterisk (\*) wildcard.

#### **Examples**

The following example displays all fields under the agent/config field.

Example of All Nested Fields with Wildcard (\*)

You can combine individual field names, nested field names, and the \* wildcard.

Example Combination of Individual fields, Nested fields, and Wildcard

#### **Linux: Save Fields for Reuse**

On Linux, for ease of reuse of specific fields, create a display configuration file in YAML format and set the environment variable ILO\_DISPLAY\_CONFIG to point to that file. Thereafter, you no longer need to specify specific fields on the list command line.

## **Examples**

Configure the workloads list command to display only the href, hostname, all agent configuration fields, and agent version:

Example Command to Save to List Configuration File

```
ilo workload list --fields href,hostname,agent/config/*,agent/status/
agent_version
```

Add the field names to a display configuration file in the following YAML format:

Example YAML Layout of Display Configuration File

Set the Linux environment variable ILO\_DISPLAY\_CONFIG to the path to the YAML file:

Example ILO\_DISPLAY\_CONFIG environment variable

```
$ export ILO_DISPLAY_CONFIG=~/ilo_display/display_config.yaml
```

#### List of All Workloads

To view all details for all workloads, use the following command:

ilo workload list

#### **About the Workload UUID**

To view an individual workload, you need the workload's identifier, called the UUID, or Universal Unique Identifier.

The UUID is shown in the list of all workloads described in List of All Workloads [330]. The UUID is the last word of the value of the workload's href field, as shown in bold in the following example:

/api/v2/orgs/28/workloads/2ca0715a-b7e3-40e3-ade0-79f2c7adced0

#### **View Individual Workload**

To see the details about an individual workload, use the following command:

ilo workload read -workload-id UUID

Where:

• UUID is the workload's UUID. See About the Workload UUID [330] for information.

The details of an individual workload are grouped under major headings:

- Workload > Interfaces
- Workload > Labels
- Workload > Services
- Services > Open Service Ports
- Agent > Status

Example List of Individual Workload

```
+----+
+----+
| Name | Address | Cidr Block | Default Gateway Address | Link
State | Network Id | Network Detection Mode
+----+----
Workload -> Labels
+----+
/orgs/1/labels/37
Workload -> Services
| Attribute | Value
+-----
uptime_seconds | 69016553
Services -> Open Service Ports
+----
| Protocol | Address | Port | Process Name | User | Package | Win Service
+-----
Workload -> Agent
+----
| Attribute |
Value
         _____
config | {"log_traffic"=>true, "visibility_level"=>"flow_summary",
"mode"=>"enforced"}
href /orgs/1/agents/
16
Agent -> Status
Attribute
            | Value
uid
             db482b06-41c6-4297-a60c-396de13576ad
200, OK
```

#### List Draft or Active Version of Rulesets

A security policy item consists of ruleset, IP lists, label groups, services, and security settings. Before changes to these items take effect, the policy must be provisioned on the managed workload by setting its state to active with the CLI Tool or provisioning it with the PCE web console.

To view a ruleset and provisioning state use the following command:

```
ilo rule_set list --pversion state
```

Where state is one of the following values:

- Draft: Any policy item that has not yet been provisioned.
- Active: All policy items that have been provisioned and are enabled on workloads.

The provisioning states are listed in the Enabled column:

- True: The policy is provisioned.
- Empty: The policy is a draft.

Example Draft Versions of Rulesets

The state of the policy is stored in the agent/status/status field. See Nested Resource Fields and Wildcards [328] for information.

## **Import and Export Security Policy**

Using the CLI Tool, you can export and import security policy to and from the PCE. Importing and exporting security policy is particularly useful for moving policy from one PCE to another so you can avoid recreating policy from scratch on the target PCE. For example:

- You can test policy on a staging PCE and then move it to your production PCE.
- You can move policy from a proof-of-concept PCE deployment to your production PCE.

## **Export and Import Policy Objects**

You can use the CLI Tool to export or import the following objects in the PCE:

- Labels: labels
- Label groups: label\_groups
- Pairing profiles: pairing profiles
- IP lists: ip\_listsServices: services
- Rulesets and rules: rule sets

# **About Exporting Rules**

You can export rules for workloads, virtual services, or virtual servers.

For flexibility, Illumio recommends that you base your security policy rules on labels. Do not tie the rules to specific individual workloads, virtual services, or virtual servers.

Virtual servers and virtual services are not exported.

The CLI Tool policy export does not include such references. When you have rules that are tied to individual workloads, virtual services, or virtual servers, a warning is displayed on export. Attempts to import such rules fail and display the reason for the failure.

Example Failed Attempt to Export Rules for Workload

```
WARNING: rule /orgs/1/sec_policy/active/rule_sets/3/sec_rules/39 contains non-transferrable providers: workload /orgs/1/workloads/a51ae67d-472a-44c3-984e-d518a8e95aee
Unable to proceed, please verify input
```

# **Workflow for Security Policy Export/Import**

- Authenticate to the source PCE. See Authenticate with the PCE [323] for information.
- Export the policy to a file. Syntax summary:

```
ilo sec_policy export --file someExportFilename
```

- Authenticate to the target PCE. See Authenticate with the PCE [323] for information.
- Import the saved policy. Syntax summary:

```
ilo sec_policy import --file someImportFilename
```

#### **Output Options, Format, and Contents**

All exported policy is written to standard output. To write to a file, use the --file option.

Exported policy is in JSON format.

By default, all supported policy objects are exported. You can export a subset of policy by specifying one or more resource types with the -resource option (labels, label\_groups, pairing\_profiles, ip\_lists, services, or rule\_sets).

When a subset of policy items is exported (such as only labels), all referenced resources are also exported.

See also About Exporting Rules [333] for information.

#### **Exported Rulesets**

With the -- rule\_set option, you can export multiple rulesets.

By default, only the most recently provisioned, active policy is exported. To export the current draft policy or a previous policy, use the --pversion state option. See List Draft or Active Version of Rulesets [332] for information.

For a single ruleset, make sure the --pversion state you specify matches the provisioned state of the ruleset. In the following example, the state is draft:

ilo sec\_policy export --pversion draft --rule\_set /orgs/1/sec\_policy/draft/
rule\_sets/1

# **Effects of Policy Import**

All imported policy is read from standard input, unless you import from a file with the --file option.

You can import policy file multiple times. Each import affects only a single copy of a resource.

All imported policy is set to the draft provisioned state. After the import, you must explicitly provision the active state.

Non-transferrable policy rules (that is, rules tied to specific workloads, virtual servers, and bound services), the import aborts with a warning. See About Exporting Rules [333] for information.

Policy items already on the target PCE are updated by imported resources whose names match the already existing resources' names. Services do not have to have the same names. Services match if they have the same set of ports and protocols.

Resources are not deleted by an import. For example, if you export policy from PCE-1 to PCE-2, delete a resource "R" from PCE 1, and then export and import again, resource "R" is still present on PCE 2. You must explicitly delete resource "R" from PCE2.

## **Upload Vulnerability Data**

This section describes how to use the ilo commands to upload vulnerability data to the PCE for analysis in Illumination.

After uploading the data, you can use Vulnerability Maps in the PCE web console to gain insights into the exposure of vulnerabilities and attack paths across your applications running in data centers and clouds. See the "Vulnerability Maps" topic in the Visualization Guide for information.

## Add the License for Vulnerability Data Upload

An Illumio Core Vulnerability Maps license is required to upload vulnerability data into the Illumio PCE. For information about obtaining the license, contact Illumio Customer Support.

You are provided with a license file named license.json. After you have obtained your license key, store it in a secure location.



#### NOTE

Before adding the license, you must first authenticate to the PCE. See Authenticate with the PCE [323] for information.

To add the license, you must be the organization owner or a be a user who has owner privileges.

Use the following command to inform the PCE of your valid license:

```
ilo license create --license-file "path_to_license_file/license.json" --
feature "feature_name" [debug [v | verbose] trace]
```

Where:

What	Required?	Description
"path_to_li- cense_file/li-	Yes	The quoted path to the license.json file from Illumio
cense.json"		Example: "~/secretDir/license.json"
"feature_name"	Yes	The quoted string "vulnerability_maps", which specifies the feature name the license enables
debug	No	Enable debugging
v   verbose	No	For verbose logging
trace	No	Enable API trace

## **Vulnerability Data Upload Process**

On upload, the CLI Tool associates a workload's IP addresses with corresponding vulnerabilities identified for that workload.

#### **Using API to Download Vulnerability Data**

In release CLI 1.3, Tenable IO and tenable SC have been supporting both manual and API download of vulnerability data while Qualys tool was only available for manual download.



## **IMPORTANT**

Starting from the release CLI 1.4, Qualys supports also API download, with some minor differences in options.

For the release CLI 1.4.1, it is suggested that users use an API key instead of a login session while using Qualys API download.

For the release CLI 1.4.2 for Tenable, the most reliable way to provide authentication is through API keys instead of username/password. If customers observe any authentication issues while using Tenable SC API upload, they are advised to use API keys for authentication.

There are 2 ENV variables to set up the Tenable SC API keys which are used for authentication:

TSC\_ACCESS\_KEY

TSC\_SECRET\_KEY

The API connects directly to the cloud instance of Tenable or Qualys and the vulnerability tool then scans new vulnerabilities and downloads them into the PCE.

Users can also set up cron jobs that run in the desired intervals and check the state of the vulnerability scanner.

Qualys and Tenable scanners work in a similar way, using the username and password and similar options.

## **Automating Vulnerability Imports from Tenable-SC**

Users of Illumio vulnerability maps can automate the import of vulnerabilities from tenable-sc using a script.

Illumio CLI supports the API username and password as environment variables or a cmd line switch (such as --api-password).


The ILO-CLI tool was updated to add a switch for --api-user.

#### **Kinds of Vulnerability Data Uploads**

There are two kinds of upload: non-authoritative and authoritative.

- Non-authoritative: This is the default. A non-authoritative upload:
  - Appends incoming data to any previously loaded records
  - Accumulates records for the same workloads without regard to duplicates.

You can repeat the non-authoritative upload as many times as you like until you are satisfied with the results.

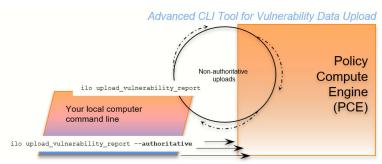

- **Authoritative:** You indicate authoritative data with the -authoritative option. An authoritative upload:
  - Overwrites any previously uploaded records for workloads matched to the incoming records.
  - Eliminates duplicate records.
  - Adds new records not previously written by other uploads.

You can repeat the authoritative upload as many times as you like until you are satisfied with the results.

After either kind of upload, you can examine the uploaded data with the CLI Tool or the PCE web console. See "Vulnerability Maps" in the Visualization Guide for information.

#### **Supported Vulnerability Data Sources**

The CLI Tool works with vulnerability data from the following sources.

- Nessus Professional™
- Qualys®
- Tenable Security Center
- Tenable.io
- Rapid7©



#### NOTE

Before uploading Rapid7 data to the PCE, export the data from Rapid7 to Qualys format with Qualys XML Export.

#### **Vulnerability Data Formats**

In the CLI 1.4.0, 1.4.1 and 1.4.2 releases, Illumio supports the following report formats:

For tenable-io: API, CSV
For tenable-sc: API, CSV
For nessus-pro: XML
For qualvs: API, XML

#### **Common Vulnerabilities and Exposures (CVE)**

Vulnerabilities are defined by Common Vulnerabilities and Exposures (CVE), with identifiers and descriptive names from the U.S. Department of Homeland Security National Cybersecurity Center.

#### **Vulnerability Scores**

Illumio computes a vulnerability score, which is a measure of the vulnerability of your entire organization. The score is displayed by the ilo vulnerability list command for all vulnerabilities or individual vulnerability via the vulnerability identifier.

#### **Vulnerability Identifier**

A uploaded vulnerability has an identifier as shown in the example below. The vulnerability identifier is tied to a specific CVE. You use this identifier with --reference-id option to

examine specific uploaded vulnerabilities. See Example - List Single Uploaded Vulnerability [342] for information.

The following are examples of vulnerability identifiers.

- Nessus Professional: nessus-65432
- Qualys: qualys-23456
- Rapid7: qualys-98765. Because Rapid7 data is first exported from Rapid7 in Qualys format, it is given a Qualys identifier when uploaded to the PCE.

#### **Vulnerabilities for Unmanaged Workloads**

You can upload vulnerabilities for unmanaged workloads. However, unmanaged workloads do not have any vulnerability score or associated CVE. If the unmanaged workload is later changed to managed, this information becomes available.

## **Prerequisites for Vulnerability Data Upload**

Before uploading vulnerability data, ensure that you are ready with the following requirements.

- An Illumio Vulnerability Maps license is required to upload vulnerability data to the PCE.
   See Add the License for Vulnerability Data Upload [334] for information.
- XML-formatted vulnerability data files from one of the supported sources.
- Authenticated CLI-tool access to the target PCE. See Authenticate with the PCE [323] for information.
- Authenticated access and necessary permissions in the PCE web console for working with vulnerability maps. See Authenticate with the PCE [323] for information.

# **Vulnerability Data Upload CLI Tool Syntax**

The key argument and option for uploading vulnerability data are as follows. For readability, this syntax is broken across several lines.

```
ilo upload_vulnerability_report
--input-file path_to_datafile.xml [path_to_datafile.xml]...
--source-scanner [nessus-pro|qualys|tenable-sc|tenable-io]
--format xml
[--authoritative]
[ --api-user ApiServerUserName --api-server SourceApiServer:port ]
```

Where:

What	Required	Description
input-file path_to_datafile.xml [path_to_data- file.xml]	Yes	Location of one or more data files to upload.
		The path to the data file can be either an absolute path or a relative path.
		If more than one data file is listed (bulk upload), separate the file names with space characters.
debug	No	Enable debugging

What	Required	Description
authoritative	No	For uploading authoritative vulnerability data. The default command is without theauthoritative option. See Kinds of Vulnerability Data Uploads [336] for information.
workload-cache FILE	No	DEBUGGING ONLY: Workload Cache file - use this if available
source-scanner [nessus-pro  qualys  tenable-sc]	Yes	Indicates the source of the scan. Note for rapid data:
		Vulnerability data from Rapid must have been exported from Rapid in Qualys XML format.
		To load the Rapid data, use the 'qualys' argument
format	Yes	Report format. Allowed values are:
REPORT_FORMAT		xml
		•source-scanner nessus-pro •source-scanner qualys
		CSV
		•source-scanner tenable-sc •source-scanner tenable-io
		api
		<ul><li>source-scanner tenable-sc</li><li>source-scanner qualys</li><li>source-scanner nessus-pro</li></ul>
		See alsoapi-server andapi-user.
api-server Sour- ceApiServer:port	Yes for	API server FQDN. Allowed formats are HOST or HOST: PORT
SERVER_FQDN	Tenable with format api	
api-user ApiSer- verUserName	Yes for source API	The user name for authenticating to the SourceApiServer.
USERNAME	server au- thentication	You are always prompted to enter your password.
api-page-size	Yes for Qualys and	Appropriate page size if API supports pagination. The default page is 1000.
PAGE_SIZE	Tenable	
skip-cert-verifi- cation	Yes for Qualys and Tenable	Disable certificate verification for API.
on-premise	Yes only for Tenable io	Tenable IO deployment is on premise.
mitigated	Yes only for Tenable sc	Tenable SC input is exported from the mitigated vulnerabilities analysis view.

What	Required	Description
scanned-after	Yes for Qualys	Qualys users can select scan data to process after a certain date, in ISO 8601 format.
SCANNED_AFTER		When the optional scanned-after option is not provided, the system will pull all the historical vulnerability records from your Qualys account. If your account has historical records, it may take a very long time for the first time. With the scanned-after option, vulnerability data scanned after a certain date will be extracted and uploaded. It is recommended to include a certain scanned-after time if you use Qualys API upload option for the first time.
severities SEVERI- TIES	No	Qualys API users can select vulnerabilities with defined severity levels to include in their report.
		Users can filter based on severity and avoid severity levels 1 and 2, which are often very informational and noisy.
		Example:only-include-severity=3,4,5
		For Windows, be sure to include quotes around the severity levels:
		Example:only-include-severity="3,4,5"
		NOTE: This option was added in Release 1.4.1
-v,verbose	No	Verbose logging mode
trace	No	Enable API trace mode

## **Using the ILO Command with Windows Systems**

Windows systems take a maximum of four options with the ILO command for the vulnerability data upload. Users who choose to use more optional parameters need to set api-server, username, and password as the environmental variables to use other options in the command.

#### **Work with Vulnerability Maps in Illumination**

See "Vulnerability Maps" in the Visualization Guide for information.

## **Vulnerability Data Examples**

## **Example - Upload Non-Authoritative Vulnerability Data**

In this example, the --source-scanner nessus-pro option indicates that the data comes from Nessus Professional. On Windows, provide the absolute path to the data file. This Windows example is broken across several lines with the PowerShell line continuation character (`).

```
C:\Users\donald.knuth> ilo upload_vulnerability_report `
--input-file C:\Users\donald.knuth\Desktop\vuln_reports\nessus3.xml `
--source-scanner nessus-pro --format xml

Elapsed Time [0.05 (total : 0.05)] - Data parsing is done.

Elapsed Time [1.08 (total : 1.13)] - Got workloads. Workload count: 5.

Elapsed Time [0.0 (total : 1.13)] - Built workload interface mapping. Total
```

```
interfaces : 11.
Elapsed Time [4.57 (total : 5.7)] - Imported Vulnerabilities..
Elapsed Time [0.0 (total: 5.7)] - Detected Vulnerabilities are associated
with vulnerability and workload data..
Elapsed Time [0.83 (total: 6.53)] - Report Imported.
Summary:
Processed the report with the following details:
Report meta data =>
             : Generic
Report Type : nessus
Authoritative : false
Scanned IPs : ["10.1.0.74", "10.1.0.223", "10.1.0.232", "10.1.0.221",
"10.1.0.11", "10.1.0.82", "10.1.0.43", "10.1.0.91", "10.1.0.8",
"10.1.1.250"]
Stats:
  Number of vulnerabilities
  Number of detected vulnerabilities => 31
```

## **Example - Upload of Rapid7 Vulnerability Data**

The syntax for uploading vulnerability data from Rapid7 is identical to the syntax for uploading vulnerability data from Qualys. On Windows, you use the --format qualys option and the absolute path to the data file. This Windows example is broken across several lines with the PowerShell line continuation character (`).

Rapid7 data exported in Qualys format

Before uploading to the PCE, Rapid7 vulnerability data must have been exported in Qualys format from Rapid7 with Qualys XML Export.

```
C:\Users\edward.teller> ilo upload_vulnerability_report `
--input-file C:\Users\edward.teller\Desktop\vuln_reports\rapid7.xml `
--source-scanner qualys --format xml
...
Done.
```

## **Example - Upload Authoritative Vulnerability Data**

In this example, the prompt shows this is an authoritative upload.

To proceed, you must enter the word YES in all capital letters.

```
C:\Users\jrobert.oppenheimer> ilo upload_vulnerability_report --input-file dataDir/authoritativedata.xml --authoritative --source-scanner qualys -- format xml

Using /home/centos/.rvm/gems/ruby-2.4.1

Authoritative scan overwites the previous entries for all the ips within this scan. There is no ROLLBACK

Are you sure this is an authoritative scan? (YES | NO)

YES
```

```
Elapsed Time [11.86 (total : 11.86] - Data parsing is done.

Elapsed Time [0.27 (total : 12.13] - Got workloads. Workload count: 3.

Elapsed Time [0.0 (total : 12.13] - Built workload interface mapping. Total interfaces : 6.

Elapsed Time [3.02 (total : 15.15] - Imported Vulnerabilities..

Elapsed Time [0.0 (total : 15.15] - Detected Vulnerabilities are associated with vulnerability and workload data..

Elapsed Time [0.84 (total : 16.0] - Report Imported.

Summary:

Processed the report with the following stats -

Number of vulnerabilities => 14

Number of detected vulnerabilities => 48

Done.
```

## **Example - List Single Uploaded Vulnerability**

This example uses a single Qualys vulnerability identifier to show the associated vulnerability. The value passed to the --reference-id option is shown as qualys-38173. See Vulnerability Identifier [337] for information.

#### **Example - List All Uploaded Vulnerabilities**

This example highlights the vulnerability identifier, the CVE identifiers, and the description of the CVE. See Common Vulnerabilities and Exposures (CVE) [337] and Vulnerability Identifier [337] for information. The layout of the output is the same for all supported vulnerability data sources.

Nessus Professional

Qualys

Rapid7

Because Rapid7 vulnerability data must be in Qualys format before upload, the output is the same as for Qualys data, including the vulnerability identifier (qualys-38657 in the example above) and CVE. See Common Vulnerabilities and Exposures (CVE) [337] and Vulnerability Identifier [337] for information.

#### **Example - View Vulnerability Report**

The Report Type column identifies the source of the scan; in this example, Qualys.

#### **Example - Upload a Qualys Report Using API**

```
upload_vulnerability_report --source-scanner qualys --format api --api-server qualysguard.qg3.apps.qualys.com --api-user um3sg --scanned-after 2021-09-20
```

# **CLI Tool Tutorials**

This section provides several hands-on exercises that demonstrate step-by-step how to perform common tasks using the CLI Tool.

## **How to Import Traffic Flow Summaries**

Static Illumination provides "moment-in-time" visibility of inter-workload traffic. This visibility is useful to model policies, to look for specious traffic flows, and to ensure that metadata for labels is accurate.

#### Goal

Load workload and traffic data needed for analysis with static Illumination.

## Setup

This tutorial relies on the following data to import.

• 1,000 workloads defined in the file bulkworkloads-1000.csv, which has the following columns:

```
hostname,ips,os_type
10.14.59.8.netstat,10.14.59.8,linux
10.4.78.178.netstat,10.4.78.178,linux
10.37.134.179.netstat,10.37.134.179,linux
...
```

• 1,000,000 traffic flows defined in the CSV file traffic.clean-1m.csv, which has the following columns:

```
src_ip,dst_ip,dst_port,proto
10.40.113.86,10.14.59.8,10050,6
10.14.59.8,10.8.251.138,8080,6
10.40.113.124,10.14.59.8,22,6
...
```

## **Steps**

The workflow is authenticate to the PCE and run two ilo bulk\_upload\_csv commands.

- **1.** Authenticate to the PCE via API key or explicit login. See Authenticate with the PCE [323] for information.
- 2. Load the workload data:

```
ilo workload bulk_upload_csv --file bulkworkloads-1000.csv
```

3. Load the traffic flow data:

```
ilo traffic bulk_upload_csv --file traffic.clean-1m.csv
```

## Results

The data from the CSV files are uploaded.

#### **How to Create Kerberos-Authenticated Workloads**

This tutorial describes how to create workloads that use Kerberos for authentication. The tutorial makes the following assumptions:

- This tutorial assumes that you already have your Kerberos implementation in place.
- As required by Kerberos, the Kerberos realm name is shown in all capital letters as MYR-EALM.
- VEN environment variables must be set *before* VEN installation. Environment variables for Linux are detailed in the VEN Installation and Upgrade Guide.

#### Goals

- Create two workloads on Linux that are authenticated by Kerberos.
- Set the workloads' modes to idle and illuminated.
- Run the kinit command to get Kerberos tickets for the workloads.

#### Setup

The key data for using the ilo command to create these workloads are the name of the Kerberos realm and the Service Principle Name (SPN).

## **Steps**

The workflow is authenticate, run two workload create commands that set the workloads' modes, set the VEN environment variables, install the VEN, and run two Kerberos kinit commands to get Kerberos tickets for the workloads.

- 1. Authenticate to the PCE via API key or explicit login. See Authenticate with the PCE [323] for information
- 2. Create Kerberos-authenticated myWorkload1 and set its mode to idle:

```
ilo workload create --hostname myPCE.BigCo.com --name myWorkload1
--service-principal-name host/myKerberosTicketGrantingServer@MYREALM --
agent/config/mode idle
```

For information about how the mode is a nested field, see Nested Resource Fields and Wildcards [328].

3. Create Kerberos-authenticated myWorkload2 and set its mode to illuminated:

```
ilo workload create --hostname myPCE.BigCo.com --name myWorkload2
--service-principal-name host/myKerberosTicketGrantingServer@MYREALM --
agent/config/mode illuminated
```

4. Before installation, set VEN environment variables:

```
# Activate on installation

VEN_INSTALL_ACTION=activate

# FQDN and port PCE to pair with

VEN_MANAGEMENT_SERVER=myPCE.BigCo.com:8443

# Kerberos Service Principal Name

VEN_KERBEROS_MANAGEMENT_SERVER_SPN=host/myKerberosTicketGrantingServer

# Path to Kerberos shared object library

VEN_KERBEROS_LIBRARY_PATH=/usr/lib/libgssapi_krb5.so
```

5. Install the Linux VEN:

```
rpm -ivh illumio-ven*.rpm
```

**6.** Run kinit to get a Kerberos ticket for myWorkload1:

```
kinit -k -t /etc/krb5.keytab host/myWorkload1.BigCo.com@MYREALM
```

7. Run kinit to get a Kerberos ticket for myWorkload2:

```
kinit -k -t /etc/krb5.keytab host/myWorkload2.BigCo.com@MYREALM
```

#### Results

The Kerberos-authenticated workloads are created, set in the desired modes, and given a Kerberos ticket.

# **How to Work with Large Datasets**

The --async option is for working with large sets of data without having to wait for the results. The option works like "batch job."

The option can be used with any resource. The workflow is as follows:

- 1. You issue the desired ilo command with the --async option, which displays a job ID.
- 2. You take note of the job ID.
- **3.** Your session is freed up while the job runs.
- 4. The job creates a data file, which you then view with datafile --read --job-id jobID.

#### Goal

Get a report of a large workload data set.

## **Steps**

1. Issue the --async request for a workload list. Take note of job ID which is the final word of the href displayed on the Location line.

```
[kurt.goedel~]$ ilo workload list --async
Using /home/kurt.goedel/.rvm/gems/ruby-2.2.1
Location: /orgs/1/jobs/fe8a1c2b-1674-4b83-8967-eb56c4ffa1e3
202, Accepted
```

2. Check to see if the job completed. Use the job ID from the Location output in previous command:

```
[sigmund.freud~]$ ilo job read --job-id fe8a1c2b-1674-4b83-8967-eb56c4ffa1e
Using /home/sigmund.freud/.rvm/gems/ruby-2.2.1
```

3. Download the resulting data file, specifying the job ID with -uuid jobID:

```
[bill.gates ~]$ ilo datafile read --uuid 1e1c1540-8a01-0136-
ec14-02f4d6c1190c
Using /home/ bill.gates /.rvm/gems/ruby-2.2.1
... Many lines not shown
| Deleted | Name | Description | Hostname
| Service Principal Name | Public Ip
| Distinguished Name | External Data Set | External Data Reference
Interfaces | Ignored Interface Names | Service Provider | Data Center
Data Center Zone | Os
Id | Os Detail | Online | Labels | Services | Agent
| Created At
Created By
                  Updated At
                                                  Updated By
... More lines not shown
/orgs/1/workloads/50ce441e-75ac-4be8-9201-96169545019c
```

# **How to Upload Vulnerability Data**

This example tutorial shows how to upload vulnerability data to the PCE. For more information, see Upload Vulnerability Data [334]. The source of the vulnerability data in this example comes from Qualys<sup>®</sup>.

#### Goal

Upload authoritative vulnerability data for analysis in Illumination.

# **Steps**

1. Do a non-authoritative upload of vulnerability data for examination:

```
ilo upload_vulnerability_report --input-file C:\Users\albert-
einstein0.xml --source-scanner qualys --format xml
```

2. Examine a single uploaded vulnerability record identified by its vulnerability identifier, qualys-38173. See Vulnerability Identifier [337] for information.

```
ilo vulnerability read --xorg-id=1 --reference-id=qualys-38173
```

3. Do another non-authoritative upload of vulnerability data.

```
ilo upload_vulnerability_report --input-file C:\Users\albert-
einstein99.xml --source-scanner qualys --format xml
```

**4.** Do an authoritative upload of vulnerability data, overwriting any previously uploaded records and adding any new vulnerability records.

```
ilo upload_vulnerability_report --input-file C:
\Users\albert.einstein_FINAL.xml --authoritative --source-scanner qualys
--format xml
```

#### **Results**

The authoritative vulnerability data has been uploaded and is ready for use in Illumination.

# **Legal Notice**

Copyright © 2024 Illumio 920 De Guigne Drive, Sunnyvale, CA 94085. All rights reserved.

The content in this documentation is provided for informational purposes only and is provided "as is," without warranty of any kind, expressed or implied of Illumio. The content in this documentation is subject to change without notice.

#### Resources

- Legal information
- Trademarks statements
- Patent statements
- License statements

#### Contact Information

- Contact Illumio
- Contact Illumio Legal
- Contact Illumio Documentation